


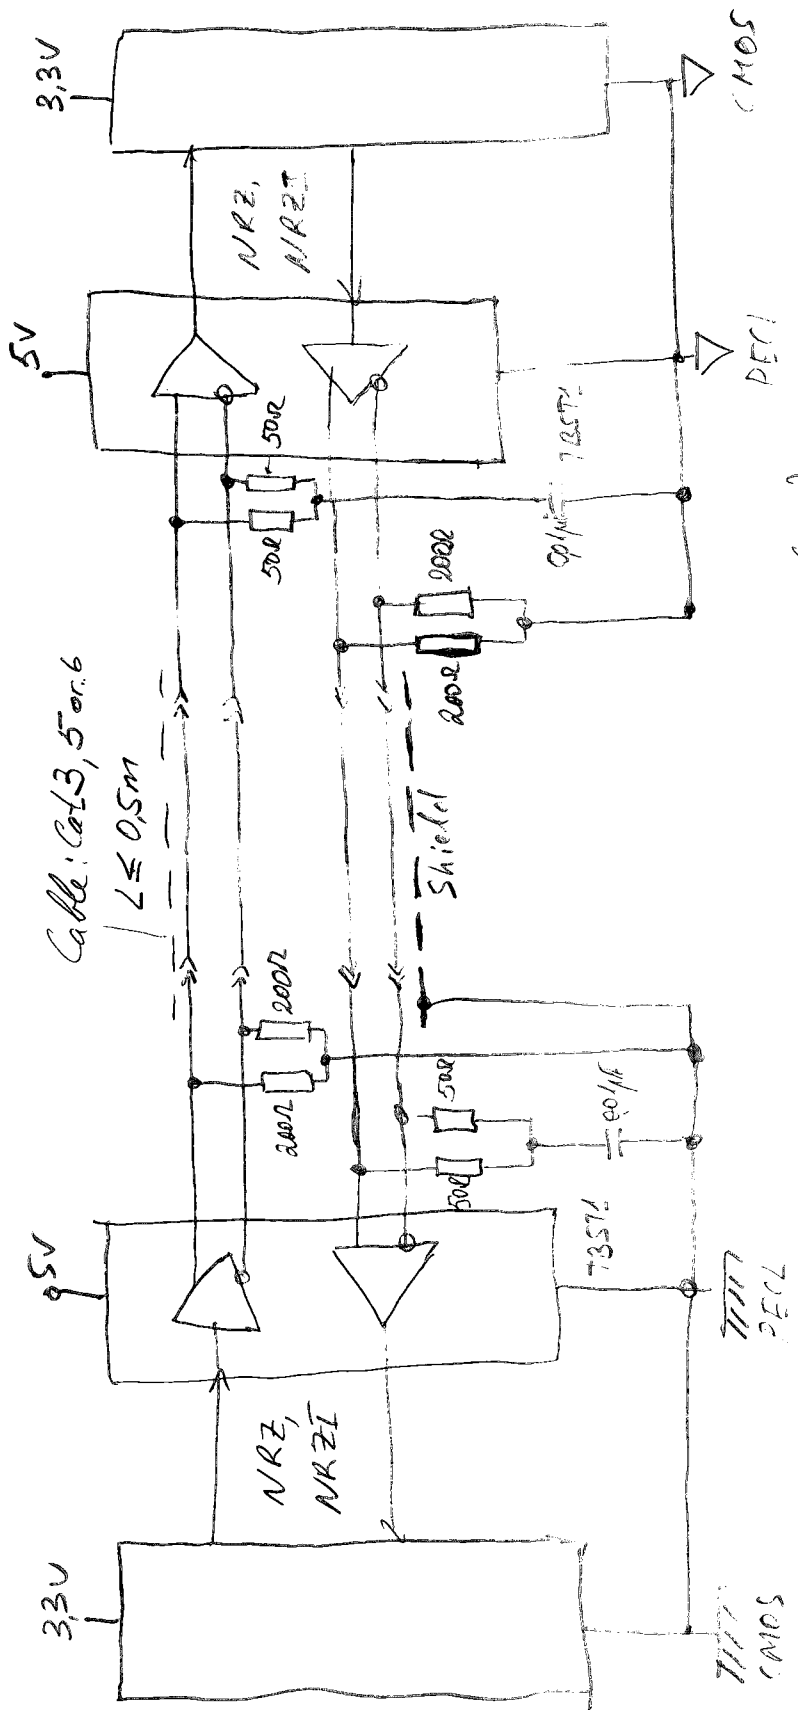

Transmission: $dc \div 50(100)MHz$

It is possible TBS71-applications without common grounding system
 to both receiver and driver for $dc \div 50(100)MHz$ switching rates.
 Can you give me an design example and requirements for, Cable's shielding and grounding.