

TECHNICAL DATA SHEET




Page 1 of 3

PORTABLE ANTENNAS HELICAL SPECIAL ¼ WAVE

169 MHz

SPHL24169TI

Series: ANTENNA

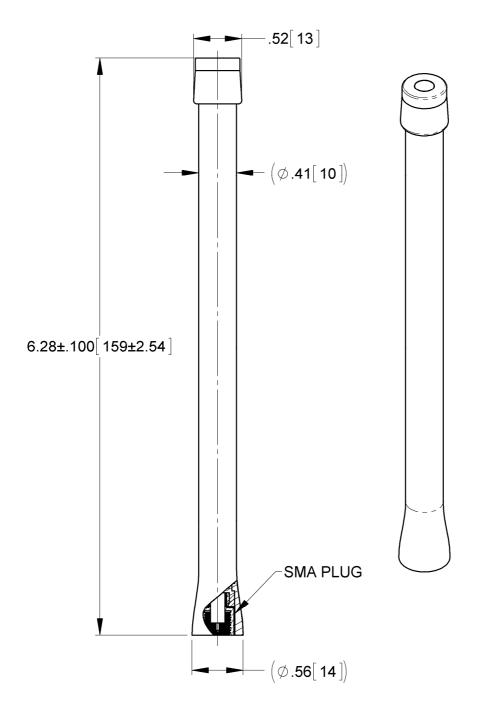

All dimensions are in inches (mm)

Issue: 1136

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





TECHNICAL DATA SHEET



Page 2 of 3

PORTABLE ANTENNAS HELICAL SPECIAL ¼ WAVE

SPHL24169TI

169 MHz

Series: ANTENNA

ELECTRICAL SPECIFICATIONS

Frequency 169 MHz

Nominal Impedance 50 Ω

VSWR 2:1 Max

Gain (Radiating element) 0.0 dBi \pm 1 dB

Band width 12 %

Polarization: Vertical

Power withstanding 2 W

Connector type SMA male plug

Cable type

MECHANICAL SPECIFICATIONS

Radome Overmolded Urethane

Color Black

Weight 13.0 g

Overall length 6.28 INCHES

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40/+70 ° C

Issue: 1136





TECHNICAL DATA SHEET



Page 3 of 3

PORTABLE ANTENNAS HELICAL SPECIAL ¼ WAVE


SPHL24169TI

169 MHz

Series: ANTENNA

Charts

VSWR

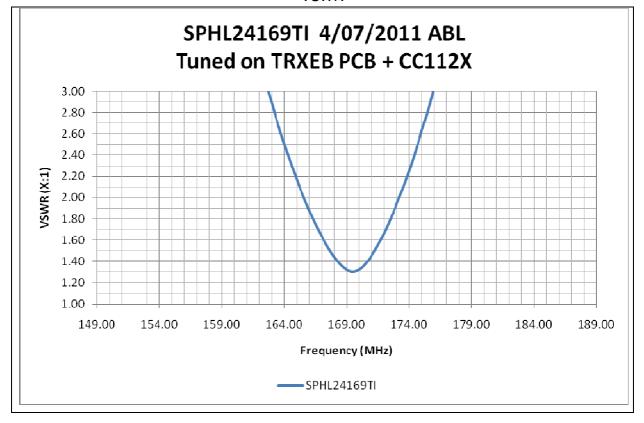

Issue: 1136

