


PRELIMINARY

Coupled Inductor

For SEPIC Applications

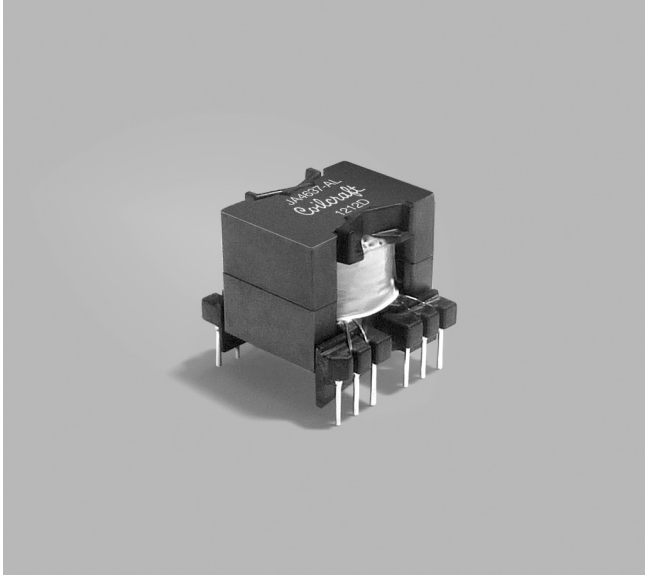

- Developed for use with Texas Instruments TPS40210 SEPIC Converter; shown on PMP5143 reference design.
- 1 : 1 coupled inductor
- Winding to winding isolation: 100 Vrms

Core material Ferrite

Terminations RoHS tin-silver over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 40.2 g

Ambient temperature -40°C to +85°C

Storage temperature Component: -40°C to +85°C.

Packaging: -40°C to +80°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)


38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 64 per tray



PCB washing Only pure water or alcohol recommended

Part number	Inductance ¹ ±10% (μH)	DCR max ² (Ohms)	Leakage inductance ³ min (μH)	Isat ⁴ (A)
JA4637-AL	250	0.10	0.20	2.5


1. Inductance is measured at 200 kHz, 1.0 Vrms.
2. DCR is for each winding
3. Leakage inductance measured from pin 6 to pin 1 with pins 3 and 4 shorted.
4. Current at which inductance drops 10% from its value without current
5. Electrical specifications at 25°C.

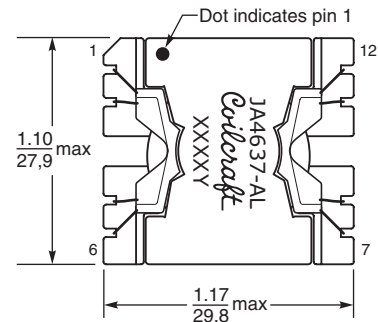

Parts manufactured prior to February, 2012 may be marked differently.

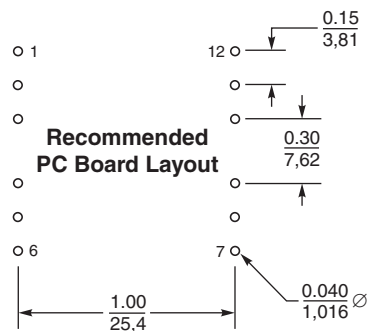

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

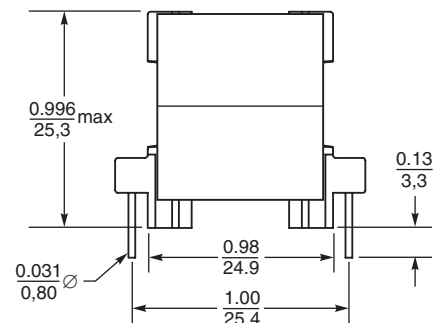

www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 848 Revised 03/23/12

© Coilcraft Inc. 2012

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.