



1. Close GUI, power cycle the board
2. Launch the UCD90xxx Device as shown below.

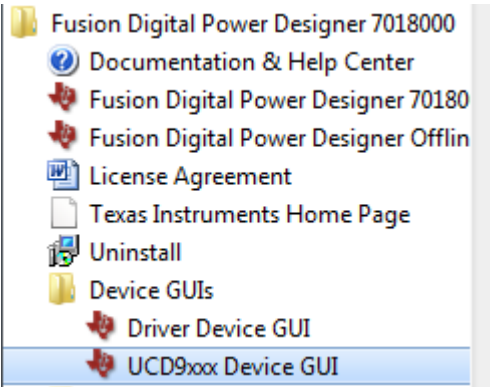

3. Click scan device in ROM mode

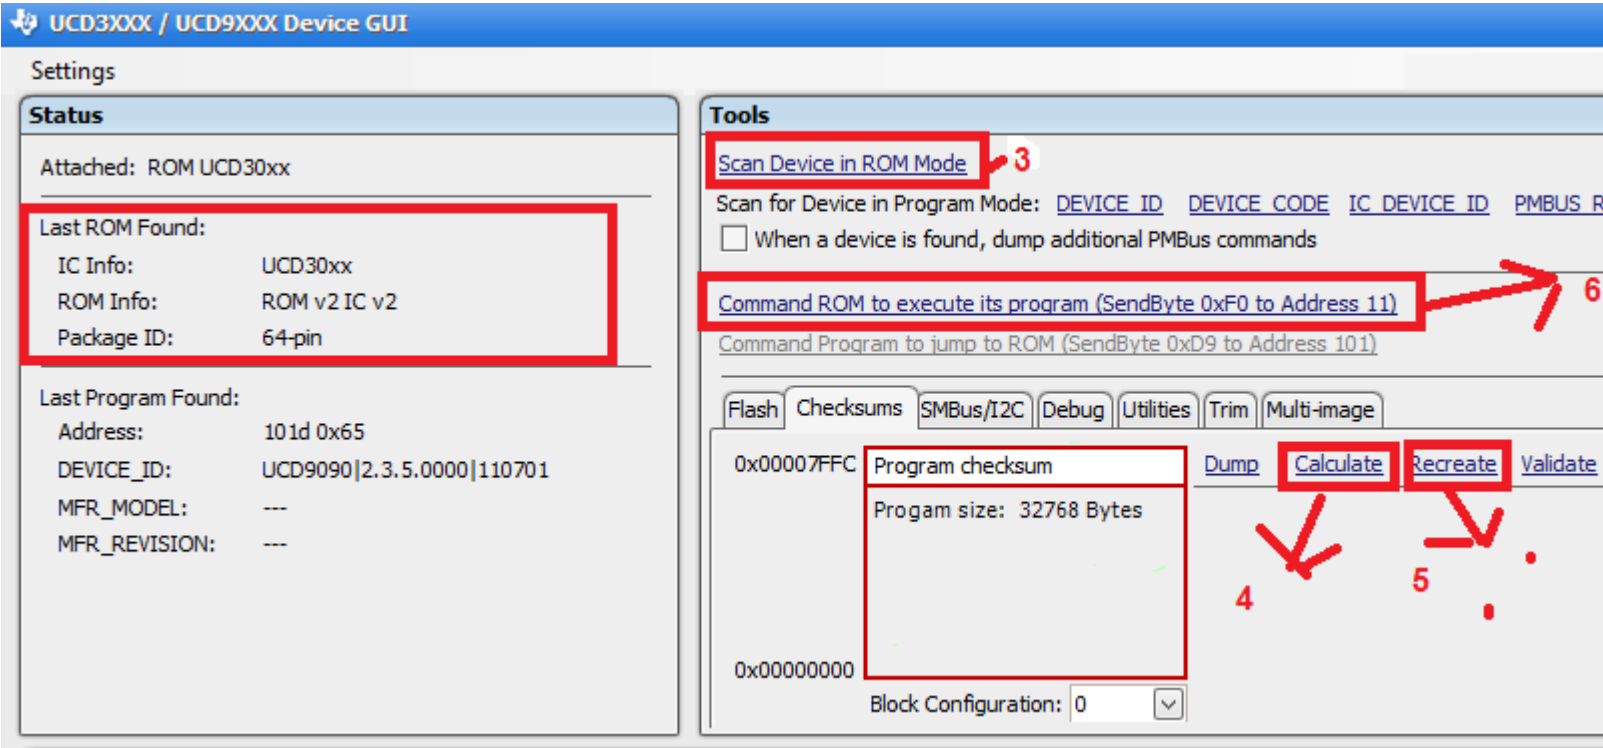

4. Click the calculate and expect to see 0x00329F99 as shown in the log section

**If you do not see, 0x00329F99 Please stop here, do not proceed and contact your local TI sale representative for further help. Proceeding without 0x00329F99 will brick the device at own risk.**

5. If you do see 0x00329F99, click the recreate to generate the checksum
6. The last step is to command ROM to execute its program.
7. After above step, the device shall function as normal.