


# DR-VE-10-MO

## VErsatile RF amplifier module

The DR-VE-10-MO is a high-grade OEM RF amplifier assembled with the latest generation of monolithic microwave integrated circuits (MMICs) chips. This confers to the device the highest performance we can expect from an RF amplifier: wide bandwidth for fast rise and fall time, high linearity, very good signal to noise ratio, and very low time jitter.

The DR-VE-10-MO is a non-inverting medium output voltage RF amplifier module. It is named VErsatile because it can be used for linear (analog, RFoF, PAM), low duty cycle pulses (square or pulse shaping, PPM) and digital modulation schemes (RZ & NRZ).

For each of these applications, the RF amplifier is factory preset with optimal setpoints for a convenient and ease of use operation. An embedded microcontroller allows the user to select the right operating mode through a Graphical User Interface. The GUI also comes with a custom tuning mode where the gain, amplitude and cross point can be optimized over a very wide tuning range.



### FEATURES

- Output voltage up to 8 V<sub>pp</sub>
- Linear / pulse / digital amplifier
- Bandwidth from 16 kHz up to 11 GHz
- Preset modes

### APPLICATIONS

- RFoF, PAM, Analog modulation
- PPM, low duty-cycle pulse train
- Pulse carving and shaping
- Digital RZ, NRZ

### RELATED EQUIPMENTS

- Phase and intensity modulators

### Performance Highlights

Parameter	Min	Typ	Max	Unit
Cut-off frequencies	16 k	-	11 G	Hz
Output voltage	-	-	8	V <sub>pp</sub>
Gain	-	30	33	dB
Saturated power	-	-	23	dBm

# DR-VE-10-MO

VErsatile RF amplifier module Driver

## Characteristics and measurements

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Impedance	Z	-	-	50	-	$\Omega$
Low frequency 3dB point	$f_{\text{lower}}$	-	-	16	25	kHz
High frequency 3dB point	$f_{\text{higher}}$	-	10	11	-	GHz
Small signal Gain	$S_{21}$	-	30	33	-	dB
Gain ripple	-	$f < 11$ GHz	-	-	+/- 1.5	dB
Input return loss	$S_{11}$	$f < 16$ GHz	-	-	-10	dB
Output return loss	$S_{22}$	$f < 12$ GHz	-	-	-10	dB
Isolation	$S_{12}$	$f < 20$ GHz	-	-	-60	dB

## Analog Mode

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output power 1 dB compression	$P_{1\text{dB}}$	0 - 10 GHz 10 - 16 GHz	-	21 19	-	dBm
Saturated Output power	$P_{\text{sat}}$	$F < 10$ GHz $V_{\text{in}} \sim 0.6 V_{\text{PP}}$	-	-	23	dBm
Input power	$P_{\text{in}}$	-	-	-	0	dBm
Noise figure	NF	2 - 10 GHz	2	-	4	dB
Delay time	$t_{\text{d}}$	$f < 16$ GHz	-	450	-	ps

## Pulse Mode

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Pulse width	PW	-	70 p	-	300 n	s
Pulse repetition frequency	PRF	Depending on duty cycle	10	-	1 G	Hz
Input pulse amplitude	$V_{\text{in}}$	Square pulse Pulse shaping	- -	0.18 -	0.35 0.12	$V_{\text{PP}}$
Rise / Fall time	$t_r/t_f$	20 % - 80 %	-	24/24	28/28	ps
Output pulse amplitude	$V_{\text{out}}$	$V_{\text{in}} \sim 0.2 V_{\text{PP}}$	-	-	8	$V_{\text{PP}}$

# DR-VE-10-MO

VErsatile RF amplifier module Driver

## Digital Mode

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Data rate	-	-	0.1	-	10	Gb/s
Input eye amplitude	$V_{in}$	-	-	0.2	1	$V_{PP}$
Output eye amplitude (user ajustable)	$V_{out}$	$V_{in} \sim 0.2 V_{PP}$	2.5	6	8	$V_{PP}$
Saturated output eye amplitude	$V_{out_{sat}}$	$V_{in} \sim 0.25 V_{PP}$	-	-	8.5	$V_{PP}$
Eye cross point (user adjustable)	$X_p$	-	45	50	55	%
Output Jitter, RMS value	$J_{RMS}$	$J_{RMS} = \sqrt{J_{OUT}^2 - J_{IN}^2}$	-	1.20	1.40	ps
Rise Time / Fall Time	$t_r/t_f$	20 % - 80 %	-	20/20	24/24	ps
Q Factor	Q	$V_{out} \sim 6 V_{PP}$	16	18	-	-


## Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply voltage	$V_{bias}$	-	12	V
Supply current	$I_{bias}$	-	450	mA
Power dissipation	$P_{diss}$	-	5.4	W
Operating temperature	$T_{op}$	0	+40	°C
Storage temperature	$T_{st}$	-20	+70	°C


# DR-VE-10-MO

Test conditions: Output amplitude = 70 %, Gain = 40 %, Crosspoint = 60 %, 12 V, 300 mA


$S_{11}$  Parameter Curve

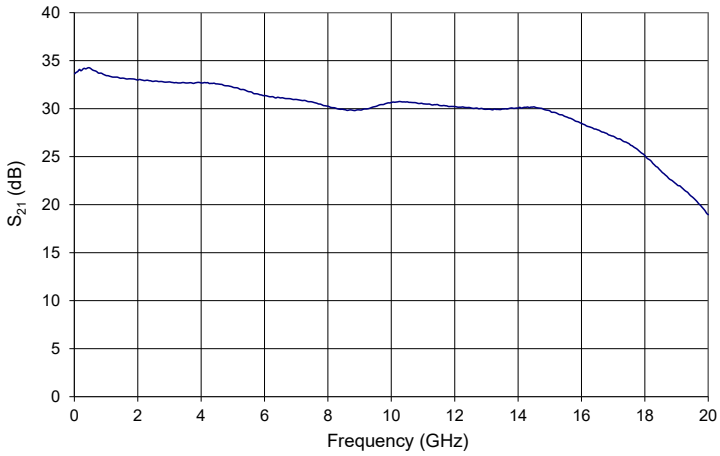


$S_{12}$  Parameter Curve

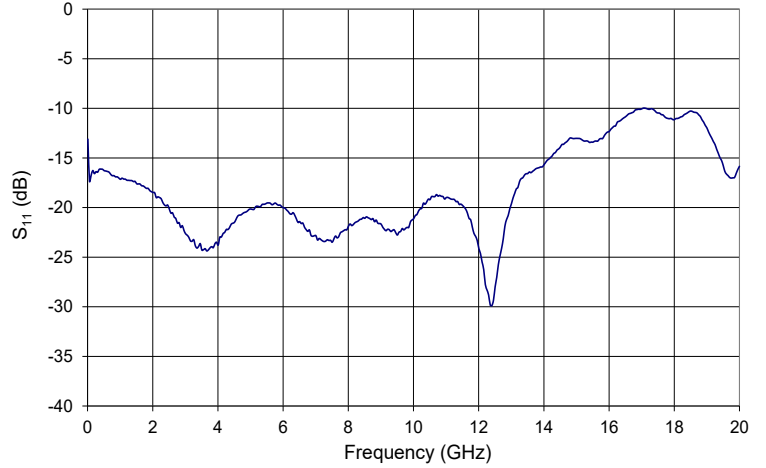


$S_{22}$  Parameter Curve

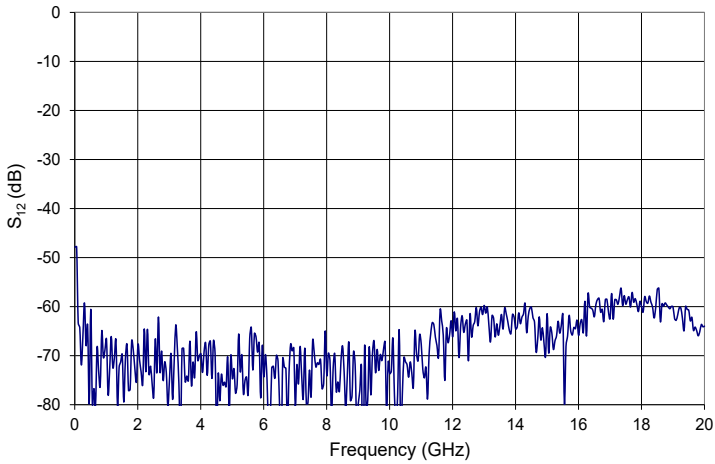

$S_{21}$  Parameter Curve

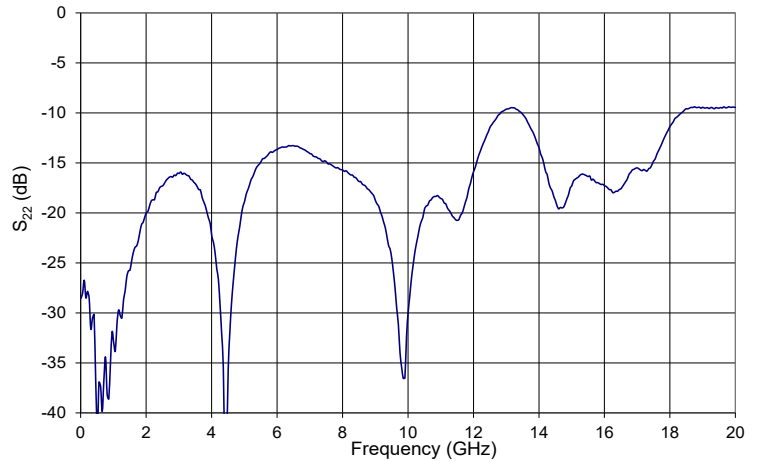

P1 dB Parameter Curve

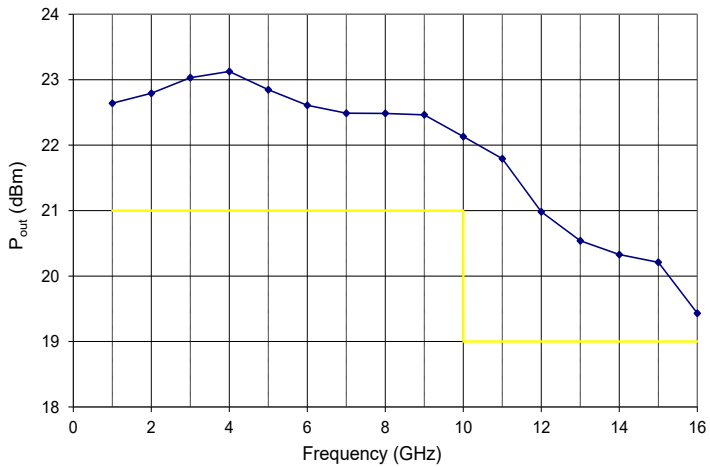


# DR-VE-10-MO

**Pulse measurement** (Pulse mode, square pulse,  $0.18 V_{pp} < V_{in} < 0.35 V_{pp}$ )  
 Test conditions depends on Pulse sign (  $\square$  or  $\square$  )

Output pulse 70 ps


Pulse  $\square$ ,  $V_{in} = 180 \text{ mV}_{pp}$

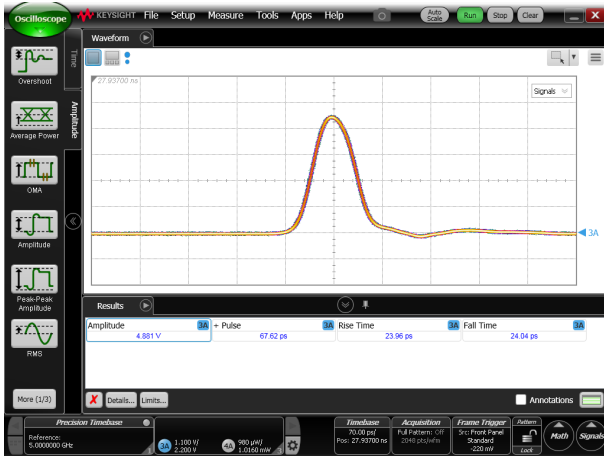

Pulse  $\square$ ,  $V_{in} = 180 \text{ mV}_{pp}$



Output pulse 1 ns


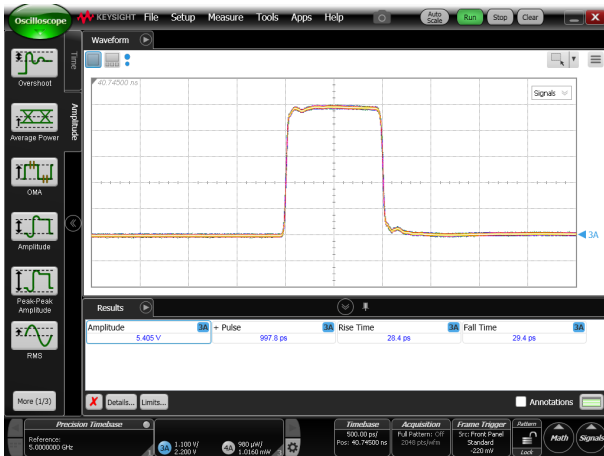


Output pulse 5 ns




# DR-VE-10-MO


Output pulse 10 ns

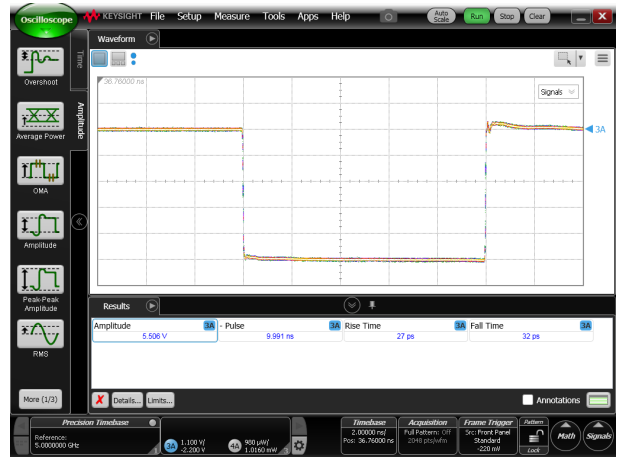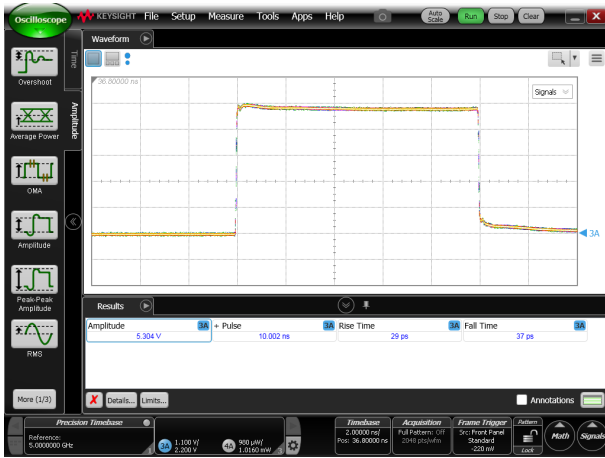

Output pulse 100 ns

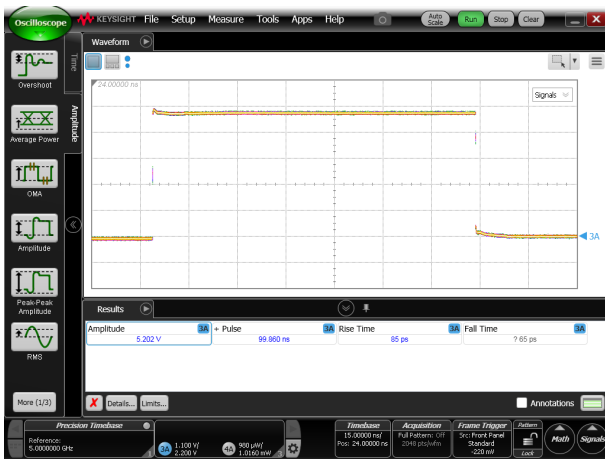

Output pulse 200 ns

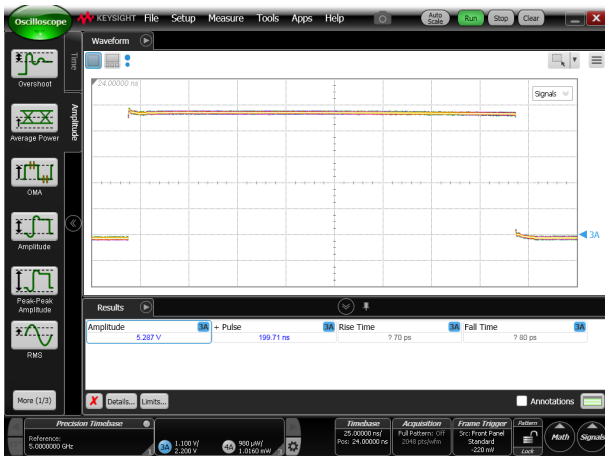

# DR-VE-10-MO


Linear Operation (Pulse mode, pulse shaping,  $V_{IN} < 0.12 V_{pp}$ )

Ramp


Pulse ,  $V_{in} \sim 90 mV_{pp}$




Pulse ,  $V_{in} \sim 90 mV_{pp}$

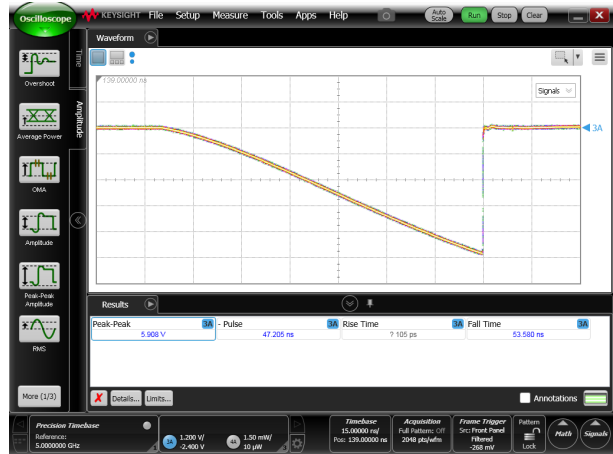

Exponential

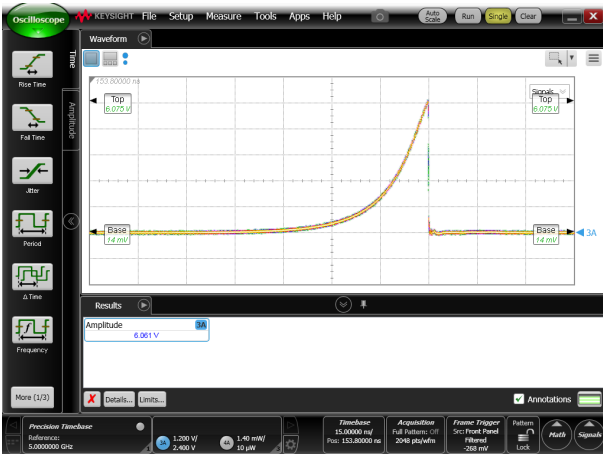

Pulse Train with Triangle envelope

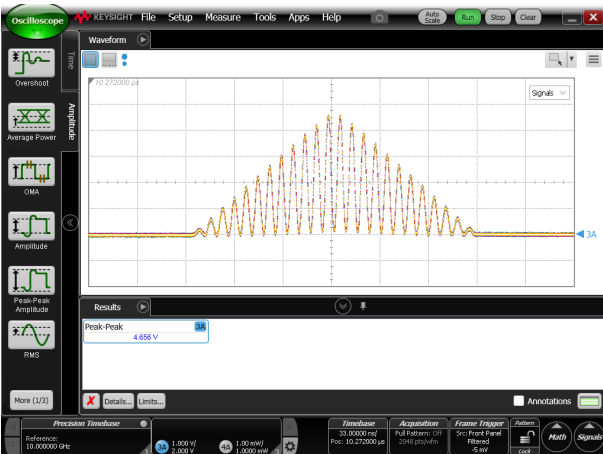

# DR-VE-10-MO

## Digital measurement:

Test conditions: Output amplitude = 45 %, Gain = 30 %, Crosspoint = 55 %, 12 V, 280 mA

Data Rate = 100 Mb/s,  $V_{in} = 220 \text{ mV}_{pp}$




Data Rate = 1 Gb/s,  $V_{in} = 220 \text{ mV}_{pp}$



Data Rate = 2.5 Gb/s,  $V_{in} = 220 \text{ mV}_{pp}$




Data Rate = 10 Gb/s,  $V_{in} = 220 \text{ mV}_{pp}$

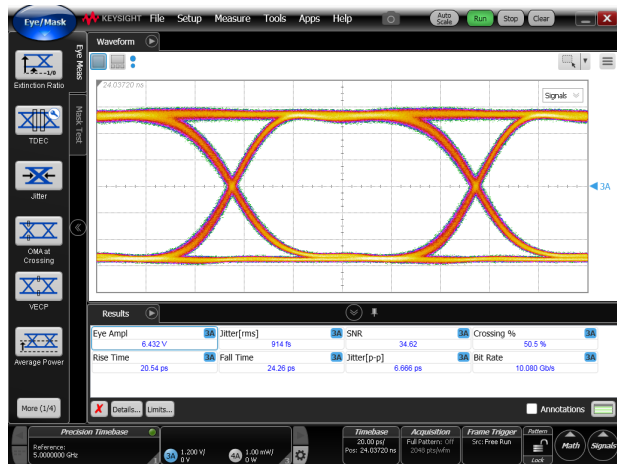





**Driver Control Application**

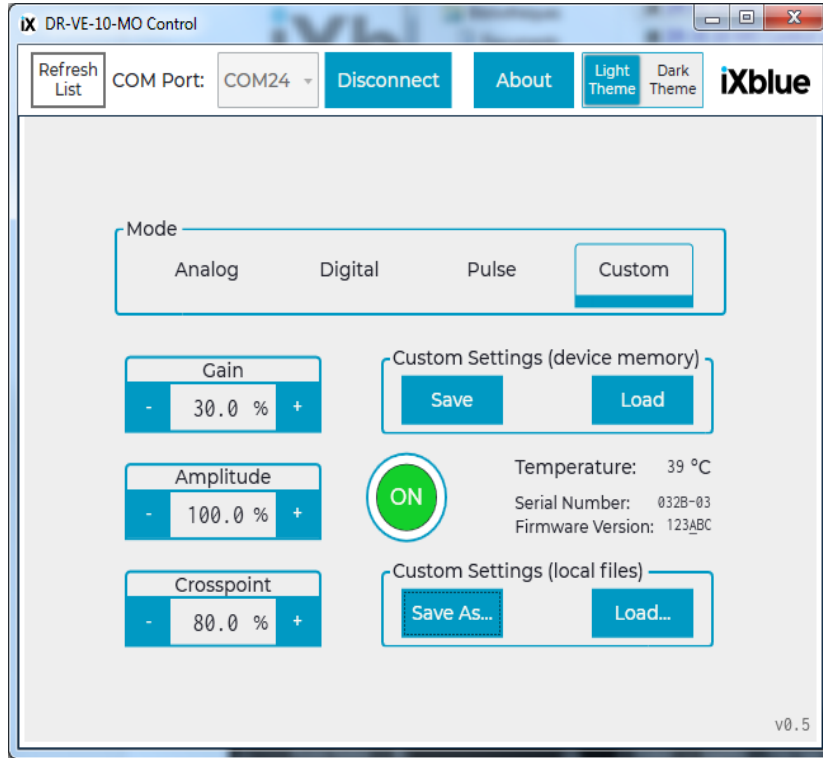

**About us**

iXblue Photonics produces specialty optical fibers and Bragg gratings based fiber optics components and provides optical modulation solutions based on the company lithium niobate (LiNbO<sub>3</sub>) modulators and RF electronic modules.

iXblue Photonics serves a wide range of industries: sensing and instruments, defense, telecommunications, space and fiber lasers as well as research laboratories all over the world.

iXblue reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein. All statements, specification, technical information related to the products herein are given in good faith and based upon information believed to be reliable and accurate at the moment of printing. However the accuracy and completeness thereof is not guaranteed. No liability is assumed for any inaccuracies and as a result of use of the products. The user must validate all parameters for each application before use and he assumes all risks in connection with the use of the products.