


TVP5158 Patch Code Download Guidelines

1 Overview

This application note explains how to load RAM code into the TVP5158 video decoder. The TVP5158 video decoder by default executes firmware from internal ROM on power up. Special functions or optimizations are available by utilizing the internal RAM of the TVP5158. The following describes the processed required to access and load code into the TVP5158 RAM.

2 Understanding the VBUS

It is important to understand that loading RAM code is not a feature provided by the standard I²C register map. This procedure requires I²C writes to the physical hardware of the TVP5158 CPU. These internal registers of the TVP5158 video decoder are known as VBUS registers. The figures below show a typical VBUS register access.

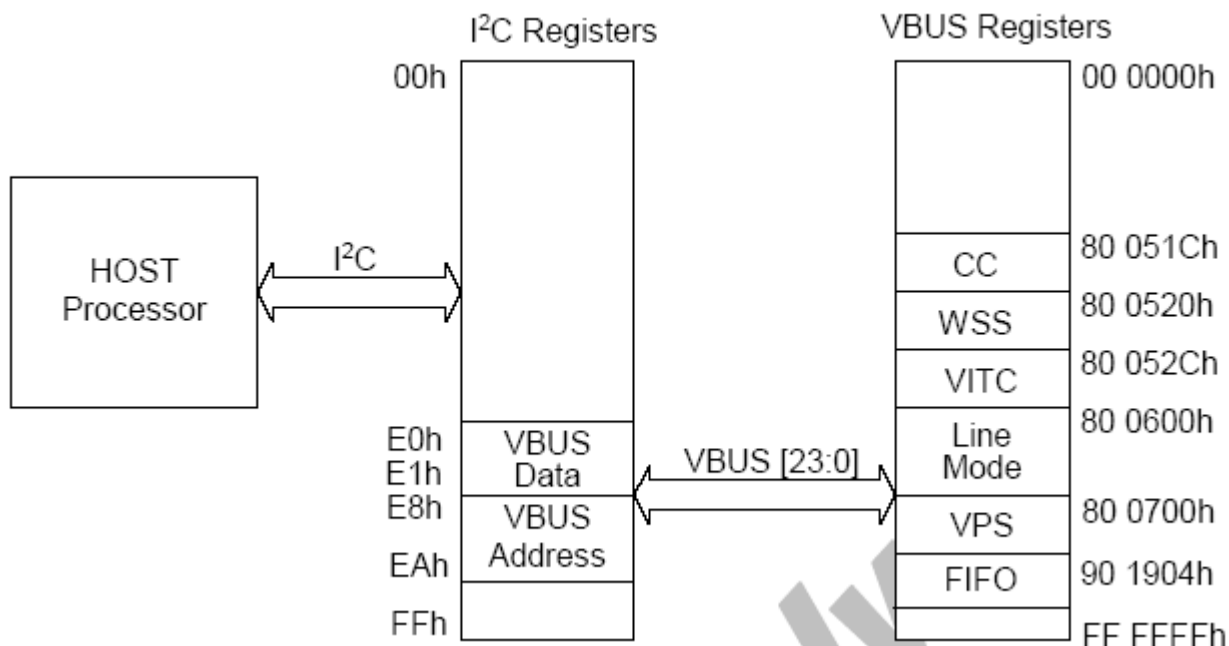

VBUS Write
Single Byte

S	B8	ACK	E8	ACK	VA0	ACK	VA1	ACK	VA2	ACK	P
---	----	-----	----	-----	-----	-----	-----	-----	-----	-----	---

S	B8	ACK	E0	ACK	send data	ACK	P
---	----	-----	----	-----	-----------	-----	---

Multiple Bytes

S	B8	ACK	E8	ACK	VA0	ACK	VA1	ACK	VA2	ACK	P
---	----	-----	----	-----	-----	-----	-----	-----	-----	-----	---

S	B8	ACK	E1	ACK	send data	ACK	...	send data	ACK	P
---	----	-----	----	-----	-----------	-----	-----	-----------	-----	---

VBUS Read
Single Byte

S	B8	ACK	E8	ACK	VA0	ACK	VA1	ACK	VA2	ACK	P
---	----	-----	----	-----	-----	-----	-----	-----	-----	-----	---

S	B8	ACK	E0	ACK	S	B9	ACK	read data	NAK	P
---	----	-----	----	-----	---	----	-----	-----------	-----	---

Multiple Bytes

S	B8	ACK	E8	ACK	VA0	ACK	VA1	ACK	VA2	ACK	P
---	----	-----	----	-----	-----	-----	-----	-----	-----	-----	---

S	B8	ACK	E1	ACK	S	B9	ACK	read data	MACK	...	read data	NAK	P
---	----	-----	----	-----	---	----	-----	-----------	------	-----	-----------	-----	---

The examples above use default the I²C address, 0xB8. The following acronyms are detailed below.

- ACK - Acknowledge generated by the slave
- MACK - Acknowledge generated by the master
- NAK - No Acknowledge generated by the master

3 The Process

There are 6 steps required in order to properly load RAM code into the TVP5158.

1. Set the I²C to write to 4 decoders

0xFE, 0x0F

2. Place the CPU into Reset

By writing a 1 to bit 0 of the first byte in the 0xB00060 VBUS address, the internal processor is placed into a reset state. This is necessary in order to load RAM code. To do this the VBUS address must first be set. Set VBUS address to 0xB00060 by making the following I²C writes.

0xE8, 0x60

0xE9, 0x00

0xEA, 0xB0

Where:

0xE8, 0xE9, 0xEA indicates the bytes of the address being setup (byte1, etc)

0x60, 0x00, 0xB0 indicates the bytes of the physical VBUS address

Once these writes have been performed, the current VBUS address is set to 0xB00060. Use the non-incrementing data register, 0xE0, to set the Reset bit by setting bit 0 to 1.

0xE0, 0x01

3. Set the I²C to write to 4 decoders

0xFE, 0x0F

4. Set the VBUS to the Beginning of Program RAM

Now that the internal processor is in a reset state, the following I²C writes will set the VBUS to the beginning of Program RAM. This is the location in which the RAM code will be stored during the loading process. Set the VBUS address to the beginning of Program RAM, 0x400000.

0xE8, 0x00

0xE9, 0x00

0xEA, 0x40

5. Load the RAM Code

With the VBUS now set to the beginning of Program RAM, start loading the provided RAM code *.bin file using the following writes. Since the firmware code data is loaded at once, the incrementing VBUS data register, 0xE1 must be used, where:

0xE1, (RAM Code Data)

Using the above technique, all of the bytes of the firmware should be written using a single I²C transaction. See below for details.

ST B8 E1 D0 D1 ... DN-1 SP

Where:

ST = I²C start condition

B8 = TVP5158 device I²C address for writes (could also be BA depending on the GLCO/I2CA pin at the end of RESET)

E1 = I²C sub-address of the incrementing VBUS data register

D0 D1 ... DN-1D = Data from the binary firmware file. N is the number of bytes in the firmware file.

SP = I²C stop condition

6. Set the RAM Loaded Bit

In order for the default ROM code to understand RAM load has been used, the RAM Loaded bit must be used. This is used by the internal CPU to execute out of RAM instead of ROM. To set the RAM Loaded Bit set VBUS address to 0xB00060.

0xE8, 0x60

0xE9, 0x00

0xEA, 0xB0

Write 0x03 to the non-incrementing VBUS data register, 0xE0 sets the RAM Loaded Bit and keeps the CPU RESET bit set.

0xE0, 0x03

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2010, Texas Instruments Incorporated