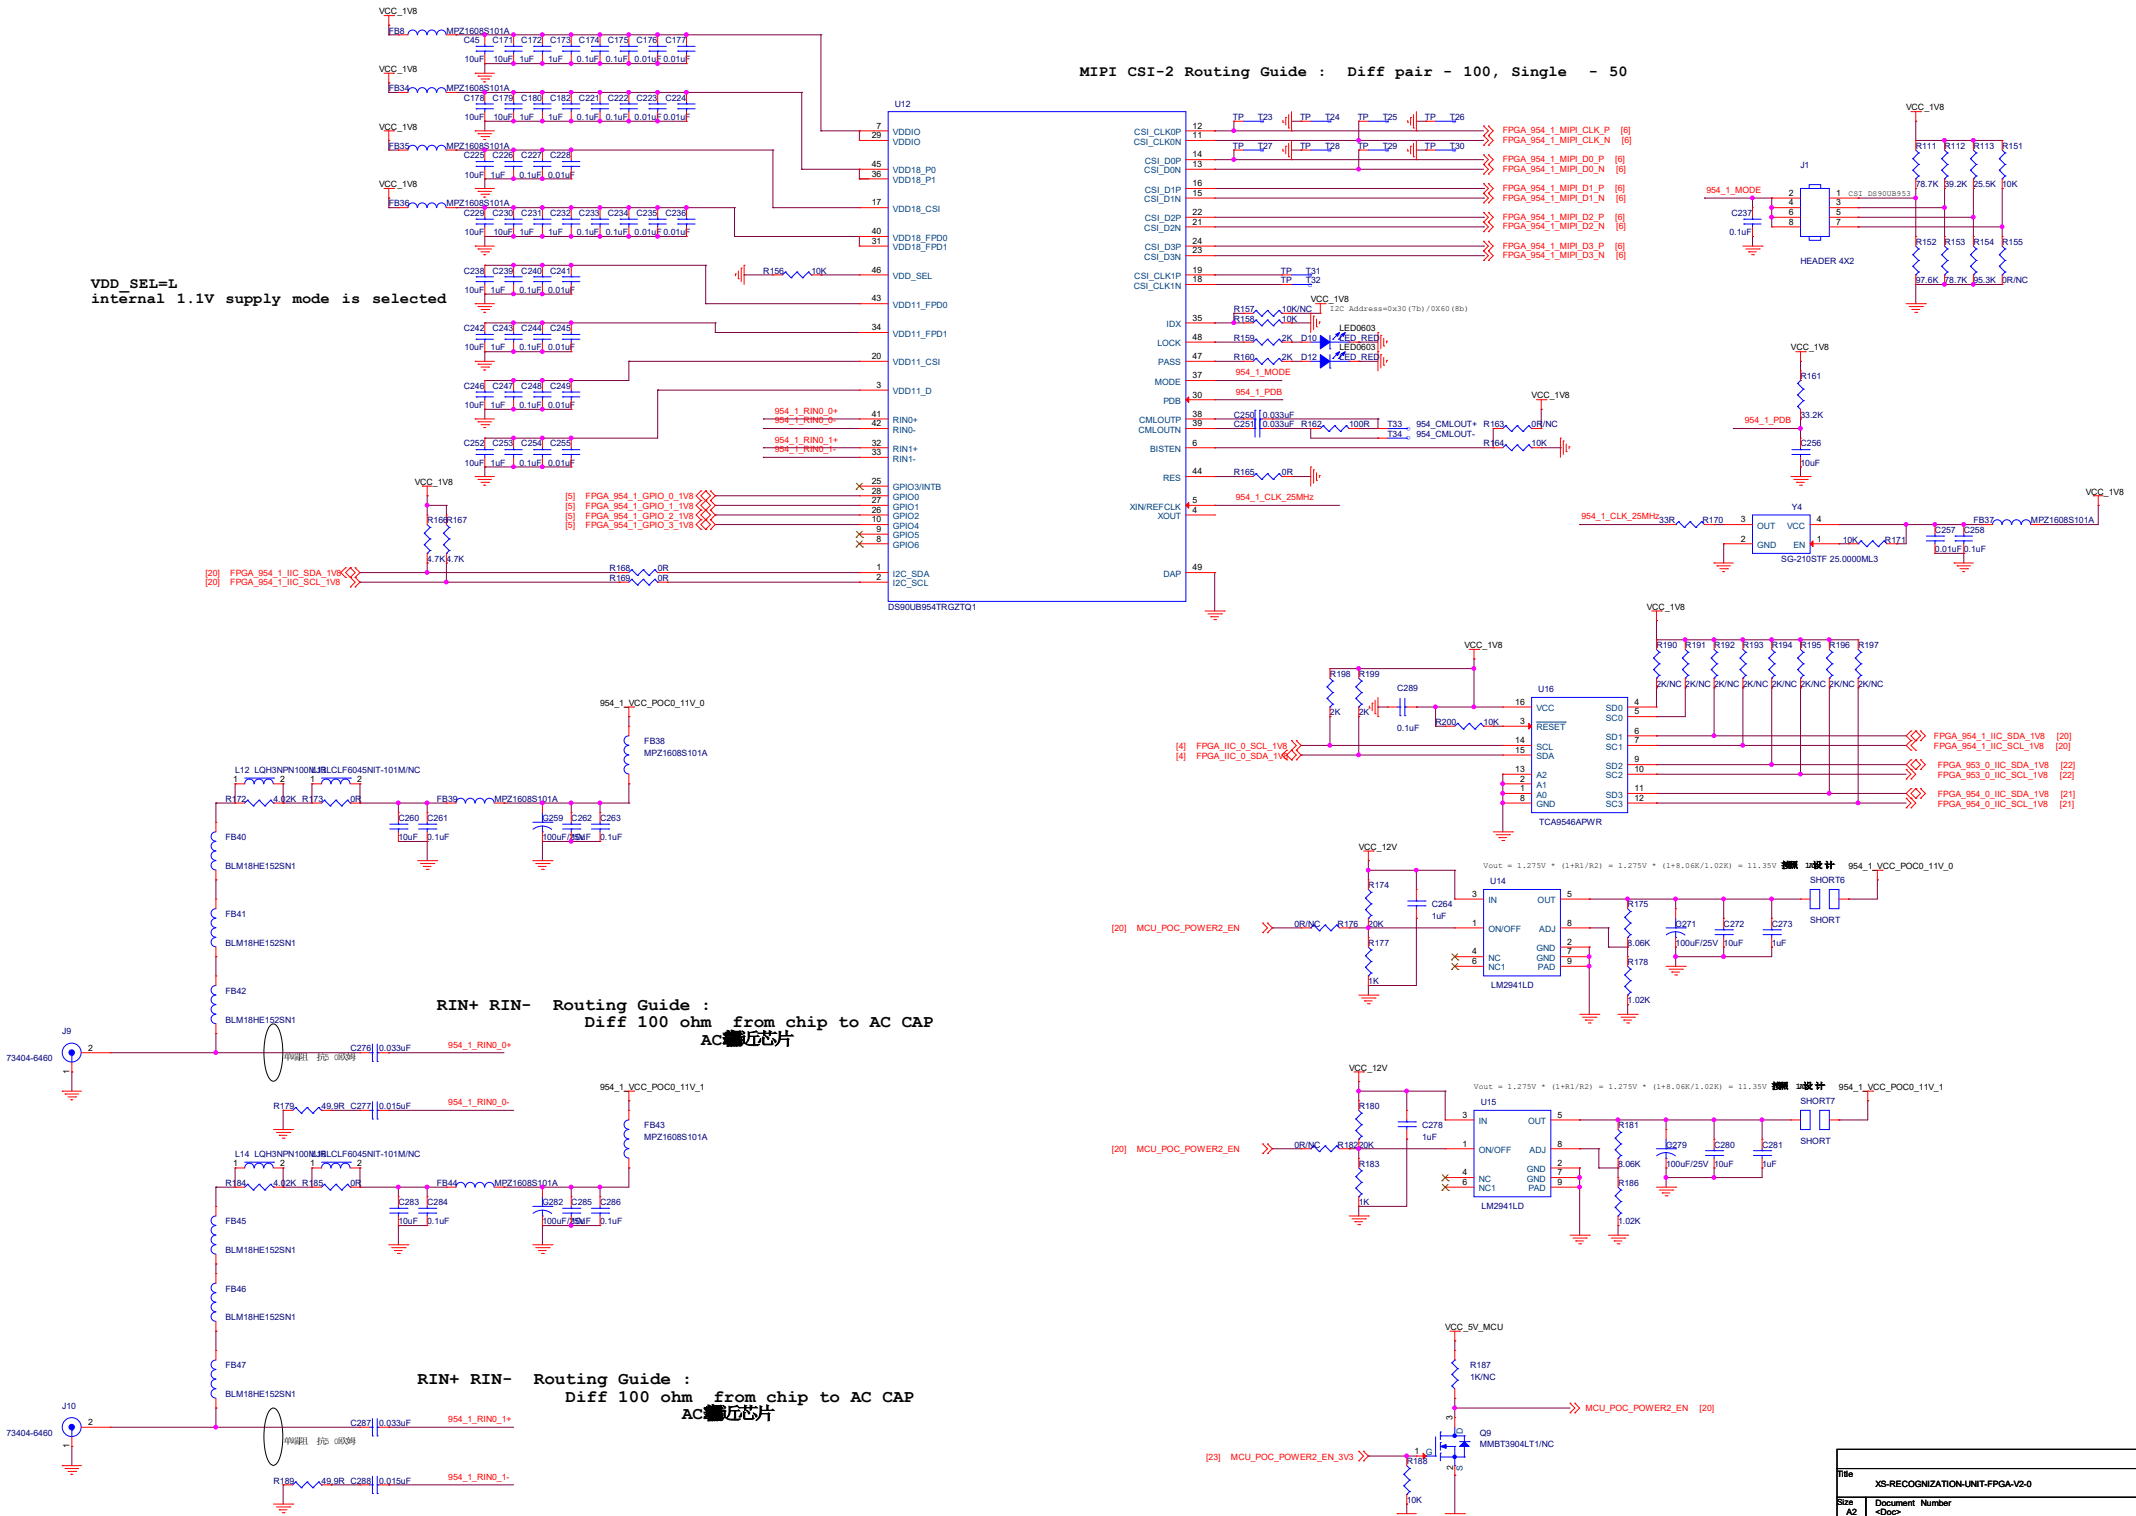
MIPI CSI-2 Routing Guide : Diff pair - 100, Single - 50
VDD_SEL=L
internal 1.1V supply mode is selected
U12
DS90UB954TRGZTQ1
J1
HEADER 4X2
Y4
SG-210STF 25.0000ML3
U16
TCA9546APWR
U14
LM2941LD
U15
LM2941LD
RIN+ RIN- Routing Guide :
Diff 100 ohm from chip to AC CAP
AC靠近芯片
J9
J10
73404-6460
Q9
MMBT3904LT1/NC
Title
XS-RECOGNIZATION-UNIT-FPGA-V2-0
Size
A2
Document Number
<Doc>
Rev
V1.0
Date:
Tuesday, July 25, 2023
Sheet
20
of
32