




```
I2C_IDX :
OPEN/40.2K -> 0x30 (Default)
180K/47.5K -> 0x32
```

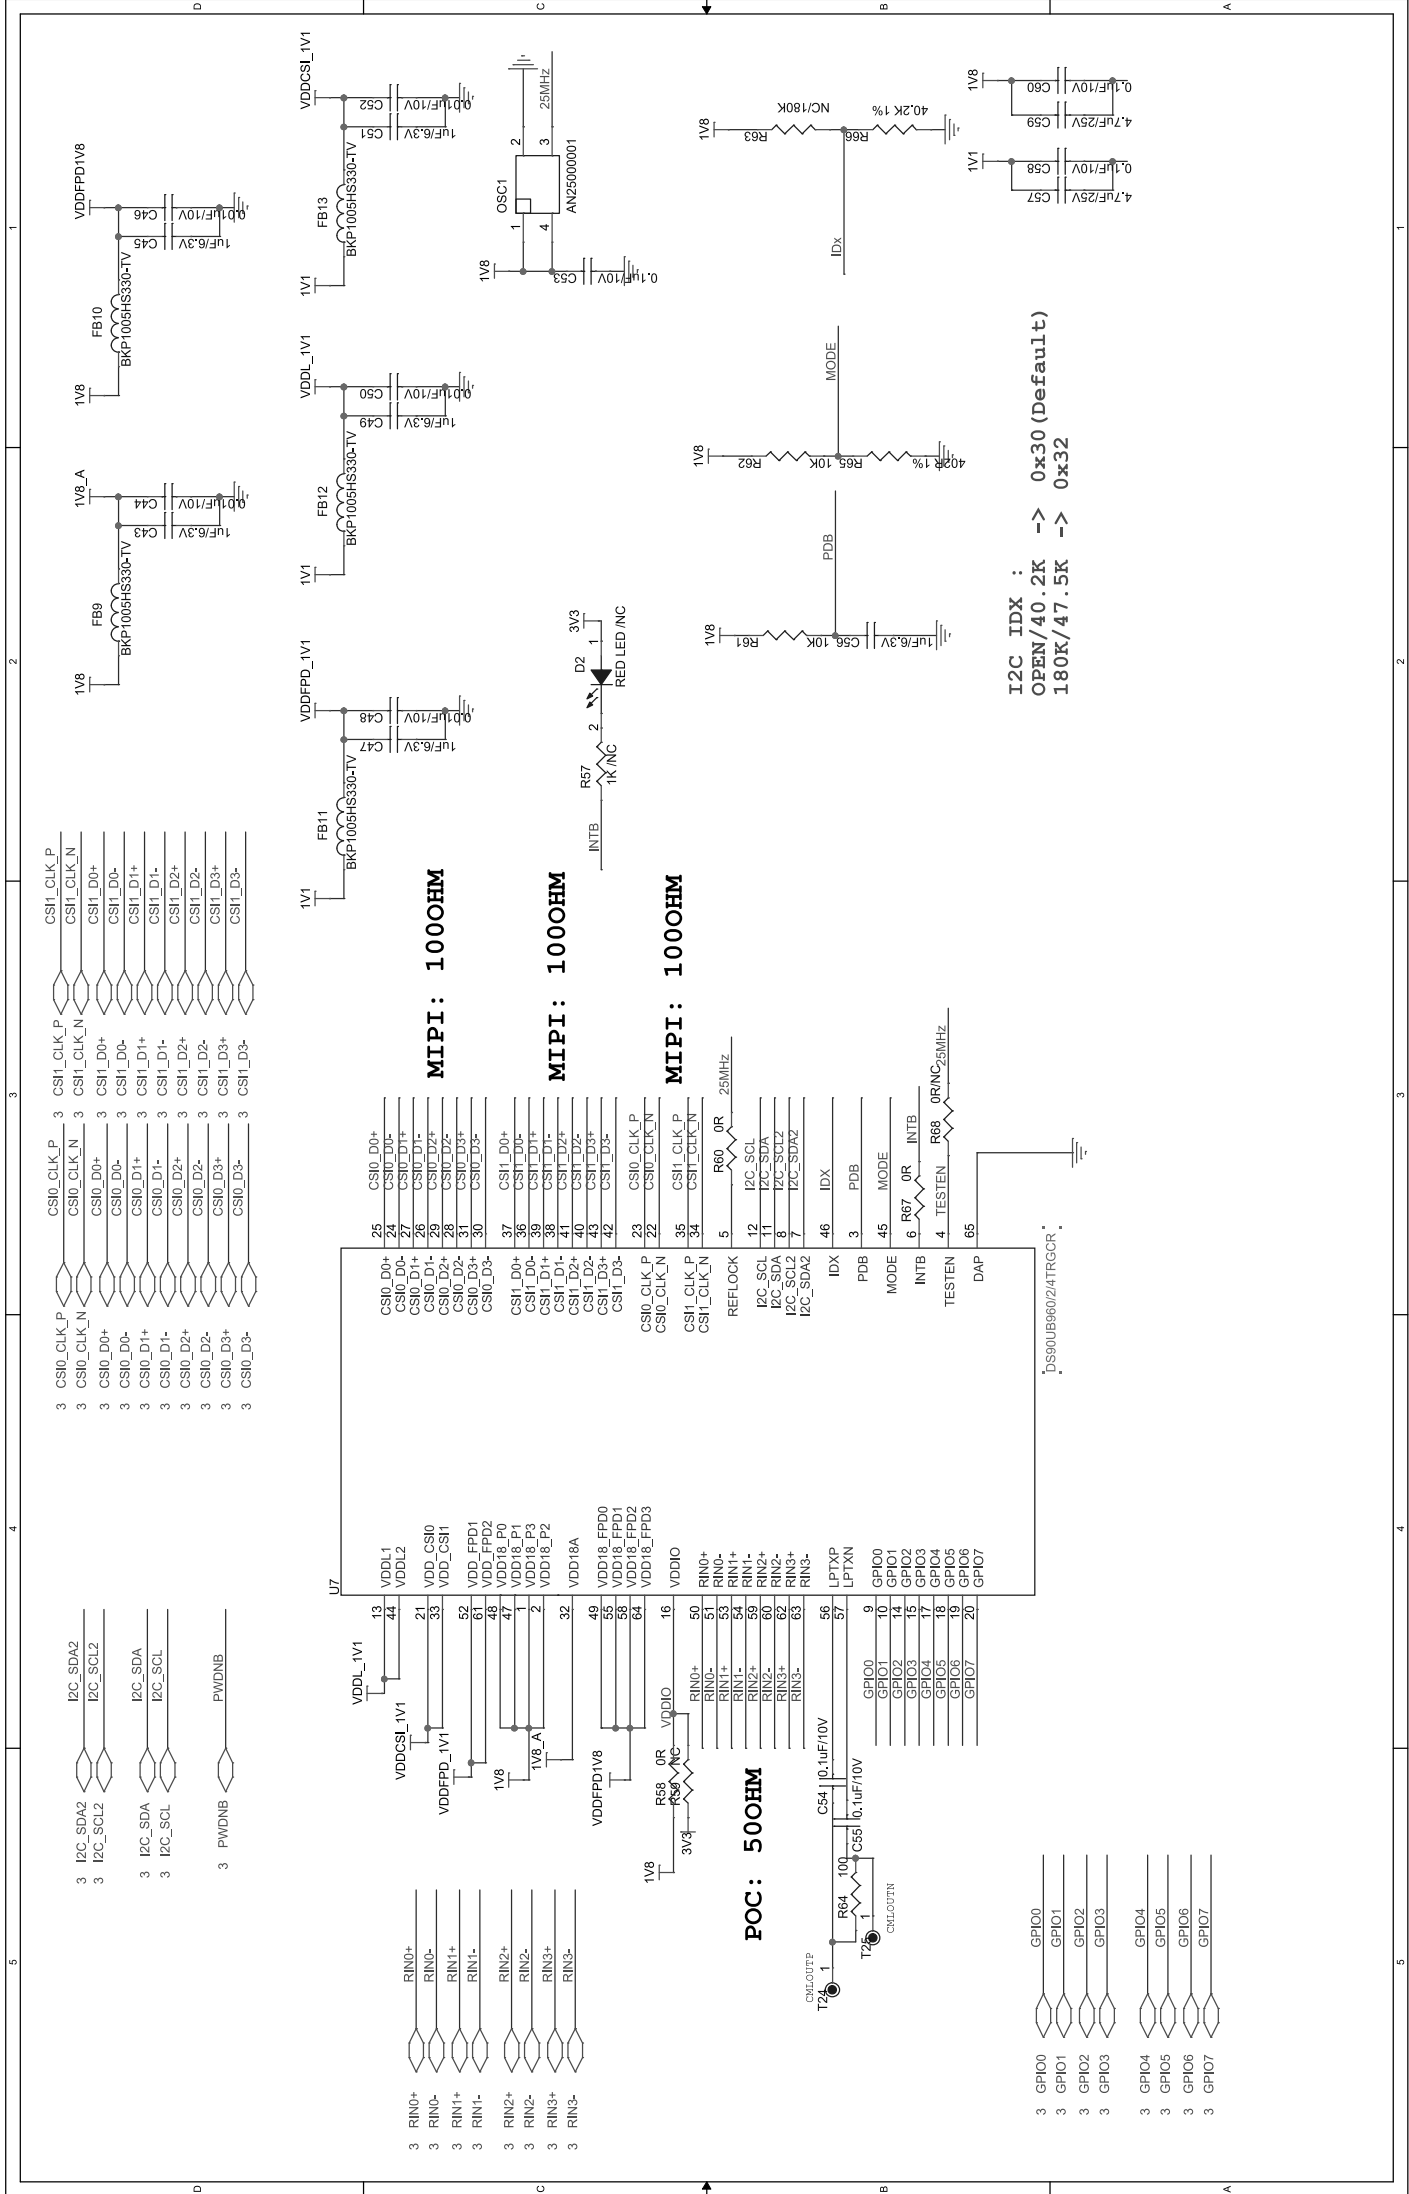