

## DEVICE SPECIFICATIONS

# PXIe-6555

## 200 MHz Digital Waveform Generator/Analyzer with PPMU

This document provides the specifications for the PXIe-6555.



**Hot Surface** If the PXIe-6555 has been in use, it may exceed safe handling temperatures and cause burns. Allow the PXIe-6555 to cool before removing it from the chassis.



**Note** All values were obtained using a 1 m cable (SHC68-C68-D4 recommended). Performance specifications are not guaranteed when using longer cables.

## Contents

---

Definitions and Conditions.....	2
Channels.....	3
Digital Generation Channels.....	4
Digital Acquisition Channels.....	5
PPMU Channels.....	6
General PFI Channels.....	13
EXTERNAL FORCE and EXTERNAL SENSE Channels.....	14
CAL Channels.....	15
Timing.....	15
Sample Clock.....	15
Generation Timing.....	17
Generation Provided Setup and Hold Times.....	20
Acquisition Timing.....	22
Setup and Hold Times to STROBE.....	24
CLK IN.....	25
PFI 5 as STROBE.....	26
PXIe_DStarA.....	27
CLK OUT.....	27
PFI 4 as DDC CLK OUT.....	28
Reference Clock (PLL).....	28
Waveform.....	29
Memory and Scripting.....	29
Calibration.....	30
Software.....	30
Driver Software.....	30
Application Software.....	31
NI Measurement Automation Explorer.....	31

Power.....	31
Physical.....	31
I/O Panel Connectors.....	32
Environment.....	32
Compliance and Certifications.....	33
Safety.....	33
Electromagnetic Compatibility.....	33
CE Compliance .....	34
Online Product Certification.....	34
Environmental Management.....	34

## Definitions and Conditions

---

Specifications are valid for the range 0 °C to 45 °C unless otherwise noted.

Accuracy specifications are valid within  $\pm 5$  °C of self-calibration unless otherwise noted.

*Maximum* and *minimum* specifications are warranted not to exceed these values within certain operating conditions and include the effects of temperature and uncertainty unless otherwise noted.

*Typical* specifications are unwarranted values that are representative of a majority ( $3\sigma$ ) of units within certain operating conditions and include the effects of temperature and uncertainty unless otherwise noted.

*Characteristic* specifications are unwarranted values that are representative of an average unit operating at room temperature.

*Nominal* specifications are unwarranted values that are relevant to the use of the product and convey the expected performance of the product.

All specifications are Typical unless otherwise noted.

# Channels

## Data

Number of channels	24, per-pin parametric measurement unit (PPMU)–enabled
Direction control	Per channel



**Note** All data channels have pattern memory.

## Programmable Function Interface (PFI)

Number of channels	
PPMU-enabled: 4	PFI 1 PFI 2 PFI 4/DDC CLK OUT PFI 5/STROBE
General: 10	PFI 0 PFI 3 PFI <24..31>
Direction control	Per channel

## Clock terminals

Input	4
Output	2
Number of remote sense channels	28



**Note** All PPMU-enabled channels have remote sense capability.

## Related Information

[CLK IN](#) on page 25

[CLK OUT](#) on page 27

# Digital Generation Channels



**Note** These features are controlled independently per channel.

Channels	DIO <0..23> PFI 1 PFI 2 PFI 4 PFI 5
Generation signal type	Single-ended, ground-referenced
Programmable generation voltage levels	Drive voltage high level ( $V_{OH}$ ) Drive voltage low level ( $V_{OL}$ ) Drive tristate ( $V_{TT}$ )
Generation voltage	
Ranges	Software-selectable: -2 V to 6 V (default) or -1 V to 7 V
Resolution	122 $\mu$ V
DC generation voltage accuracy <sup>1</sup>	
Within $\pm 5$ °C of self-calibration	$\pm 11$ mV
Within $\pm 15$ °C of self-calibration	$\pm 16$ mV
Generation voltage swing <sup>2</sup>	400 mV to 8.0 V
Output impedance	50 $\Omega$ , nominal
Maximum allowed DC drive strength per channel	$\pm 35$ mA, nominal



**Caution** Do not exceed the maximum power limit of the device.

Data channel tristate control	Software-selectable, hardware-timed: per channel, per cycle
Channel power-on state	Drivers disabled, high impedance

<sup>1</sup> Maximum accuracy when operating within the specified self-calibration temperature range.

<sup>2</sup> Into a 1 M $\Omega$  load. Power limitations may restrict the number of channels toggling at full voltage swing.

## Output protection

Range	-3 V to 8.5 V
Duration	Indefinite if maximum allowed DC drive strength of $\pm 35$ mA per channel is observed

## Digital Acquisition Channels



**Note** These features are controlled independently per channel.

Channels	DIO <0..23> PFI 1 PFI 2 PFI 4 PFI 5
Acquisition signal type	Single-ended, ground-referenced
Programmable acquisition voltages	Compare voltage high threshold ( $V_{IH}$ ) Compare voltage low threshold ( $V_{IL}$ ) Termination voltage ( $V_{TT}$ )
Acquisition voltage threshold range	-2 V to 7 V
Acquisition and termination voltage resolution	122 $\mu$ V
Termination voltage ranges	-2 V to 6 V (default) -1 V to 7 V
DC acquisition voltage accuracy <sup>3</sup>	
Within $\pm 5$ °C of self-calibration	$V_{IL} = \pm 25$ mV $V_{IH} = \pm 25$ mV $V_{TT} = \pm 11$ mV
Within $\pm 15$ °C of self-calibration	$V_{IL} = \pm 28$ mV $V_{IH} = \pm 28$ mV $V_{TT} = \pm 16$ mV
Minimum detectable voltage swing	50 mV
Input impedance	Software-selectable: High-impedance or 50 $\Omega$ terminated into $V_{TT}$
High impedance leakage	<5 nA, characteristic

<sup>3</sup> Maximum accuracy when operating within the specified self-calibration temperature range between -1.5 V and 6.8 V.

## Input protection

Range	-3 V to 8.5 V
Duration	Indefinite if maximum allowed DC drive strength of $\pm 35$ mA per channel is observed

## PPMU Channels




**Note** These features are controlled independently per channel.

Channels	DIO <0..23> PFI 1 PFI 2 PFI 4 PFI 5
PPMU signal type <sup>4</sup>	Single-ended, ground-referenced
Programmable levels <sup>5</sup>	Force voltage ( $F_V$ ) Force current ( $F_I$ ) Voltage clamp high ( $V_{CHI}$ ) Voltage clamp low ( $V_{CLO}$ )

<sup>4</sup> Referenced to the ground pins on the VHDCI connector.

<sup>5</sup> Voltage clamps are only active when forcing current.

**Figure 1. Characteristic Quadrant Behavior by Current Range**

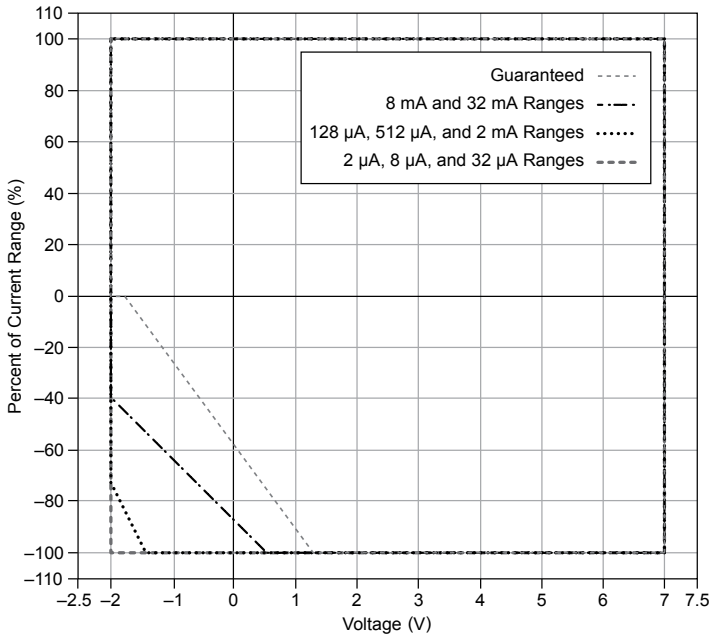

Force voltage

Ranges	-2 V to 6 V (default) -1 V to 7 V
Resolution	122 $\mu$ V
Accuracy <sup>6</sup>	
Within $\pm 5$ °C of self-calibration	$\pm 11$ mV
Within $\pm 15$ °C of self-calibration	$\pm 16$ mV

**Table 1. Force Voltage Settling Time**

Current Range	Settling Time <sup>7</sup>
2 $\mu$ A	150 $\mu$ s
8 $\mu$ A	75 $\mu$ s

<sup>6</sup> Maximum accuracy at the sense location.

<sup>7</sup> Settled to 1% of the final value. 1 V steps with 50% of the current range load into 100 pF.

**Table 1. Force Voltage Settling Time (Continued)**

<b>Current Range</b>	<b>Settling Time<sup>7</sup></b>
32 $\mu$ A	40 $\mu$ s
128 $\mu$ A	
512 $\mu$ A	
2 mA	45 $\mu$ s
8 mA	55 $\mu$ s
32 mA	60 $\mu$ s

**Table 2. Load Capacitance**

<b>Current Range</b>	<b>Load Capacitance<sup>8</sup></b>
2 $\mu$ A	1 nF
8 $\mu$ A	
32 $\mu$ A	
128 $\mu$ A	
512 $\mu$ A	4.7 nF
2 mA	10 nF
8 mA	47 nF
32 mA	100 nF


<sup>7</sup> Settled to 1% of the final value. 1 V steps with 50% of the current range load into 100 pF.

<sup>8</sup> These values represent the allowed load capacitance through a 1 m SHC68-C68-D4 cable to ensure a well-behaved transient response.




## Characteristic Step Response


**Figure 2.** Characteristic Step Response into a Capacitive Load in the 2  $\mu\text{A}$  Range

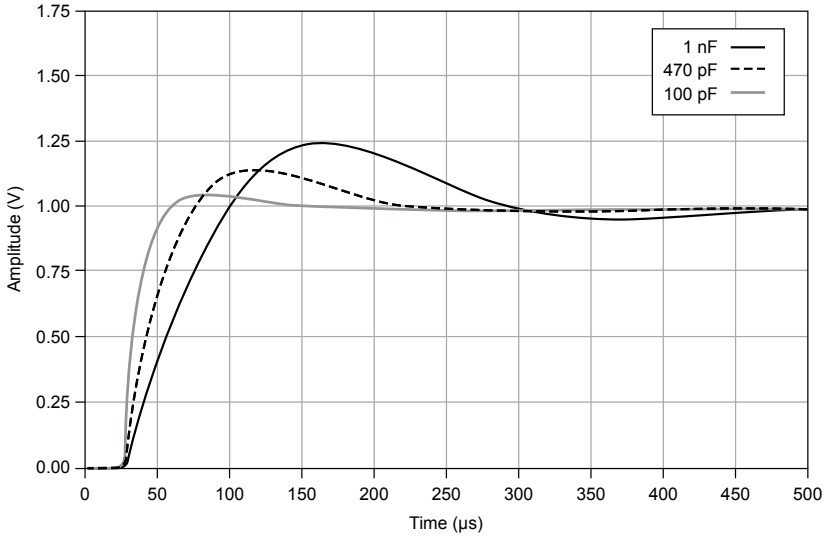

**Figure 3.** Characteristic Step Response into a Capacitive Load in the 512  $\mu\text{A}$  Range

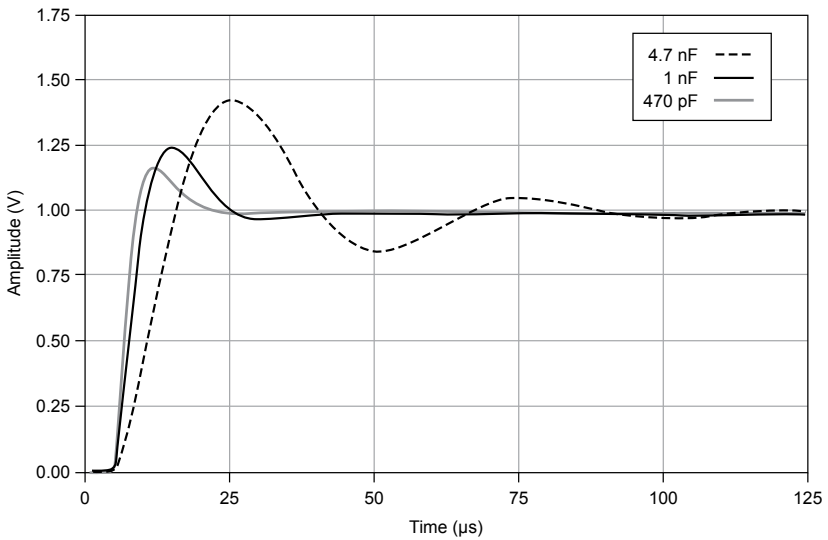

**Figure 4.** Characteristic Step Response into a Capacitive Load in the 32 mA Range

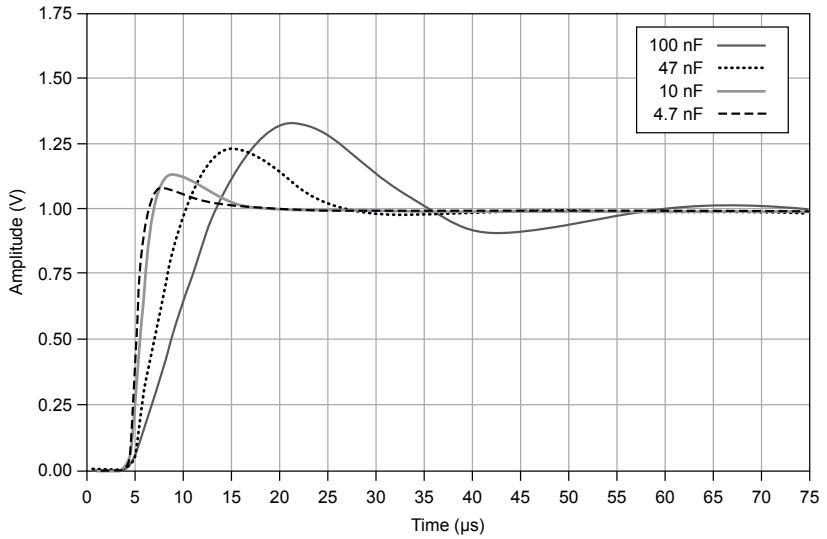

**Table 3.** Force Current Resolution, Nominal

Current Range	Resolution
$\pm 2 \mu\text{A}$	60 pA
$\pm 8 \mu\text{A}$	240 pA
$\pm 32 \mu\text{A}$	980 pA
$\pm 128 \mu\text{A}$	3.9 nA
$\pm 512 \mu\text{A}$	15.6 nA
$\pm 2 \text{mA}$	60 nA
$\pm 8 \text{mA}$	240 nA
$\pm 32 \text{mA}$	980 nA

Force current accuracy

Within  $\pm 5 \text{ }^\circ\text{C}$  of self-calibration      1% of range, maximum

Within  $\pm 15 \text{ }^\circ\text{C}$  of self-calibration      1.3% of range, maximum

## Force current voltage clamps, maximum

Current range <sup>9</sup>	
$V_{CLO}$	-2 V to 6 V, maximum
$V_{CHI}$	-1 V to 7 V, maximum
Resolution	122 $\mu$ V, maximum
Accuracy within $\pm 15$ °C of self-calibration	$\pm 100$ mV, maximum



**Note** Voltage clamps begin to conduct within 700 mV of the programmable voltage level.

## Aperture time

Range	4 $\mu$ s to 65 ms
Resolution	4 $\mu$ s


## Measure voltage<sup>10</sup>

Range	-2 V to 7 V
Resolution	228 $\mu$ V
Accuracy within $\pm 15$ °C of self-calibration	$\pm 3$ mV

<sup>9</sup> ( $V_{CHI} - V_{CLO}$ ) > 1 V

<sup>10</sup> Maximum accuracy at the sense location with one 60 Hz PLC aperture.

**Figure 5. Typical Voltage Measurement Noise for Given Aperture Times**

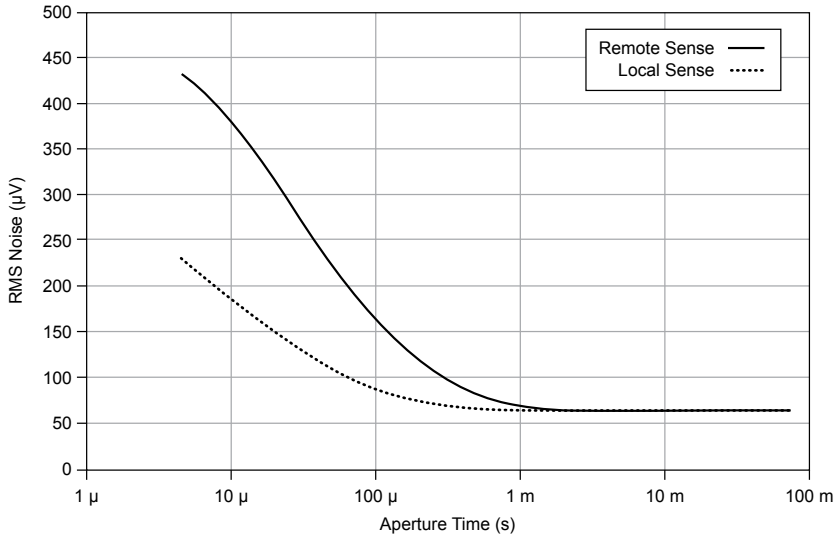

**Table 4. Measure Current Resolution, Nominal**

Current Range	Resolution
±2 µA	460 pA
±8 µA	1.8 nA
±32 µA	7.3 nA
±128 µA	30 nA
±512 µA	120 nA
±2 mA	460 nA
±8 mA	1.8 µA
±32 mA	7.3 µA


Measure current accuracy<sup>11</sup>

Within ±5 °C of self-calibration      1% of range

Within ±15 °C of self-calibration      1.3% of range

<sup>11</sup> Maximum accuracy with one 60 Hz PLC aperture.

**Figure 6.** Typical Current Measurement Noise for Given Aperture Times

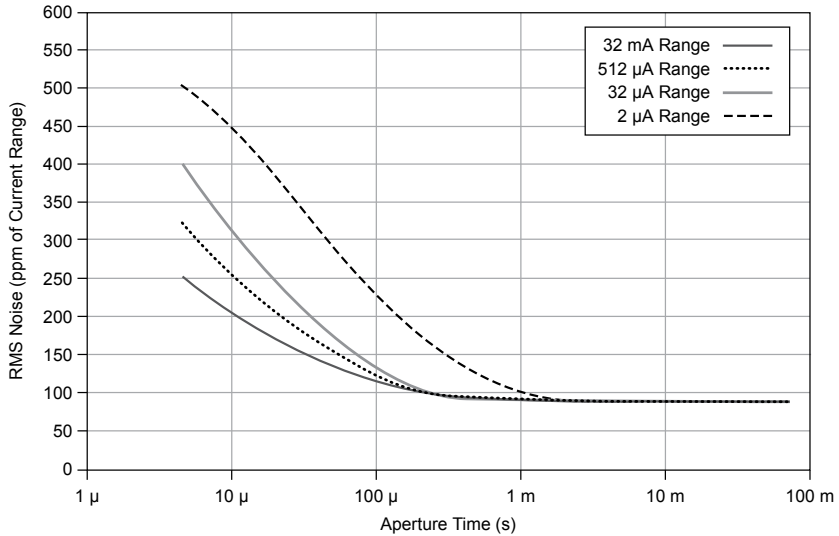

**Note**  $I_{RMS}$  Noise is represented by the following equation:  $I_{RMS} \text{ Noise} = (\text{rms Noise} \times \text{Current Range})/10^6$ . For example, 100 ppm on a 32 mA range yields a noise of  $3.2 \mu A_{RMS}$ , which is calculated as  $3.2 \mu A_{RMS} = (100 \text{ ppm} \times 32 \text{ mA})/10^6$ .

I/O switch resistance	5.5 Ω, nominal
Remote feedback impedance	100 kΩ, nominal
Output protection	
Range	-3 V to 8.5 V
Duration	Indefinite if maximum allowed DC drive strength of ±35 mA per channel is observed

## General PFI Channels

Channels	PFI 0 PFI 3 PFI <24..31>
Circuit type	
PFI 0 and PFI 3	High-speed I/O circuits
PFI <24..31>	5 V compatible I/O circuits

## Generation voltage level

Low voltage levels, characteristic	0 V, nominal
High voltage levels, characteristic	3.3 V, nominal

## Drive strength

PFI 0 and PFI 3	±33 mA
PFI <24..31>	±85 mA

Output impedance	50 Ω, nominal
------------------	---------------

## Output protection

Range	0 V to 5 V
Duration	Indefinite

## Acquisition voltage level

Low thresholds	0.8 V, nominal
High thresholds	2 V, nominal

## Input protection

PFI 0 and PFI 3	-1 V to 5 V, maximum
PFI <24..31>	-1 V to 6.5 V, maximum

# EXTERNAL FORCE and EXTERNAL SENSE Channels



**Note** These specifications are valid for the EXTERNAL FORCE and EXTERNAL SENSE channels on the REMOTE SENSE connector.

## EXTERNAL FORCE

Direction	Input
Analog bandwidth	3 MHz, characteristic with a single channel connected
Maximum current	±32 mA
Range	-2 V to 7 V

## EXTERNAL SENSE

Direction	Output
Analog bandwidth	30 kHz, characteristic with a single channel connected
Range	-2 V to 7 V

## Input protection

Range	-3 V to 8.5 V
Duration	Indefinite if maximum allowed DC drive strength of $\pm 35$ mA per channel is observed

## CAL Channels

These specifications are valid for the CAL channel on the REMOTE SENSE connector.

Direction	Output <sup>12</sup>
Voltage level	5 V, nominal
Drive strength	1 mA <sup>13</sup>

## Timing

### Sample Clock

Sources	<ol style="list-style-type: none"><li>1. On Board clock (internal)</li><li>2. CLK IN (SMA jack connector)</li><li>3. PXIe_DStarA (PXI Express backplane)</li><li>4. STROBE (acquisition only; Digital Data &amp; Control [DDC] connector)</li></ol>
---------	---

### On Board clock frequency<sup>14</sup>

Resolution	<0.1 Hz
Accuracy <sup>15</sup>	$\pm 150$ ppm, nominal

### Frequency ranges

On Board clock	800 Hz to 200 MHz
CLK IN	20 kHz to 200 MHz
PXIe_DStarA	800 Hz to 200 MHz
STROBE	800 Hz to 200 MHz

<sup>12</sup> During normal operation, this channel is in a high-impedance or an undriven state.

<sup>13</sup> Maximum allowed. Sourcing only.

<sup>14</sup> Query NI-HSDIO for the programmed frequency value.

<sup>15</sup> Increase accuracy by using a higher performance external Reference clock.

## Relative delay adjustment

Range	±5 ns
Resolution	3.125 ps



**Tip** To align multiple devices, apply a delay or phase adjustment to the On Board clock.

Exported Sample clock destinations	1. DDC CLK OUT (DDC connector) 2. CLK OUT (SMA jack connector)
------------------------------------	---



**Note** Internal Sample clocks with sources other than STROBE can be exported.


## Exported Sample clock

Offset range ( $t_{CO}$ )	Software-programmable: 0 ns to 2.4 ns
Offset resolution ( $t_{CO}$ )	Software-programmable: 13 ps
Offset accuracy ( $t_{CO}$ )	Software-programmable: ±200 ps
Duty cycle (DDC CLK OUT) <sup>16</sup>	42%, minimum 55%, maximum
Period jitter	24 ps <sub>rms</sub> , characteristic (using On Board clock)

<sup>16</sup> 3.3 V at maximum clock rate (200 MHz), not including the effects of system crosstalk.



**Figure 7. Characteristic Period Jitter (RMS) versus Frequency**

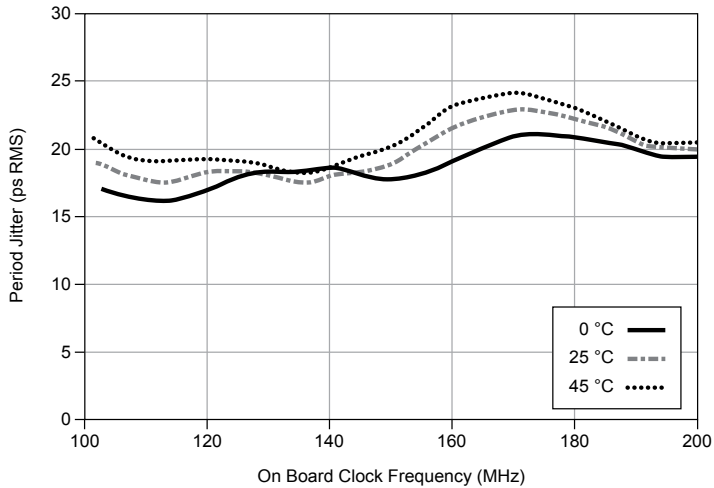

### Related Information

[CLK IN](#) on page 25

[PXIe\\_DStarA](#) on page 27

[PFI 5 as STROBE](#) on page 26


## Generation Timing

Channels	Data
	DDC CLK OUT
	PFI <0..3>
Maximum data rate per channel	200 Mbps
Maximum data channel toggle rate <sup>17</sup>	
3.3 V swing	100 MHz
5 V swing	50 MHz

The following figure shows an eye diagram of a 200 Mbps pseudorandom bit sequence (PRBS) waveform at 3.3 V. This waveform was captured on a characteristic DIO channel at room temperature into high-impedance.


<sup>17</sup> Toggle rates exceeding these values may invalidate CE certifications.

**Figure 8.** Characteristic Eye Diagram at 3.3 V

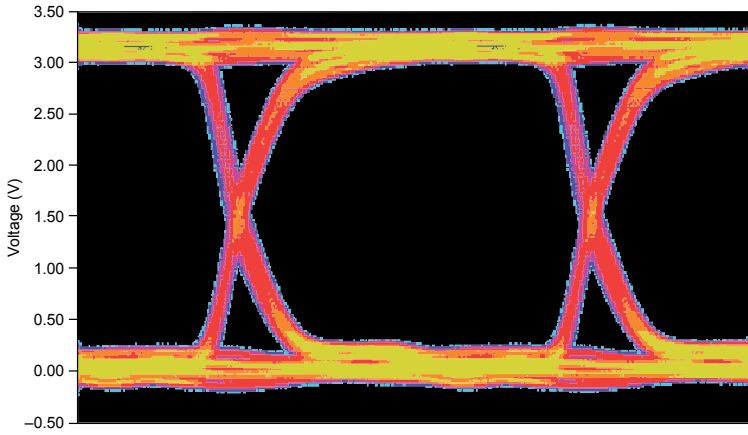

The following figure shows an eye diagram of a 200 Mbps PRBS waveform at 0.4 V. This waveform was captured on a characteristic DIO channel at room temperature into high-impedance.

**Figure 9.** Characteristic Eye Diagram at 0.4 V

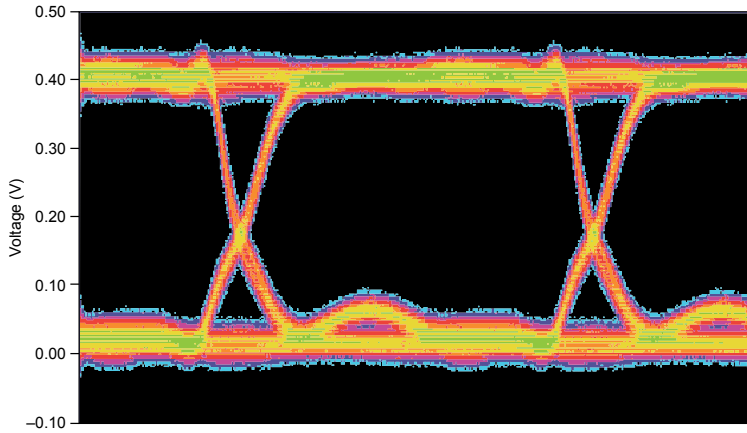

Data channel-to-channel skew	750 ps, maximum 300 ps, characteristic
------------------------------	---



**Note** There will be additional skew from crosstalk, acquisition threshold, and other transmission line effects in your system. You may see up to 150 ps of additional skew from differences between channels in the average rate of pattern transitions.

Data position modes	Sample clock rising edge Sample clock falling edge Delay from Sample clock rising edge
---------------------	--

Generation data

Frequency	
On Board clock	All supported frequencies
External clock	Frequencies $\geq 20$ MHz
Delay range	-1 to 2 Sample clock cycles, expressed as a fraction of the Sample clock period
Deskew range	-2 to 3 Sample clock cycles, expressed as a time in seconds
Delay and deskew resolution	30 ps, nominal



**Note** The sum of data delay and data deskew may not exceed -2 to 3 Sample clock cycles.

## Generation Provided Setup and Hold Times

Provided setup and hold times assume the data position is set to Sample clock rising edge and the noninverted Sample clock is exported to the DDC connector with  $t_{CO}$  programmed using exported Sample clock offset.

Provided setup time ( $t_{PSU}$ )	$t_p - t_{CO} - 850$ ps, characteristic
-----------------------------------	---

Provided hold time ( $t_{PH}$ )	$t_{CO} - 700$ ps, characteristic
---------------------------------	-----------------------------------




**Note** Exported Sample clock Offset ( $t_{CO}$ ) is software programmable.

Compare the setup and hold times from the datasheet of your device under test (DUT) to the provided setup and hold time values above. The provided setup and hold times must be greater than the setup and hold times required for the DUT. If you require more setup time, configure your exported Sample clock mode to Inverted and/or delay your clock or data relative to the Sample clock.

The following figure illustrates the relationship between the exported Sample clock mode and the provided setup and hold times.

**Figure 10.** Generation Provided Setup and Hold Times Timing Diagram

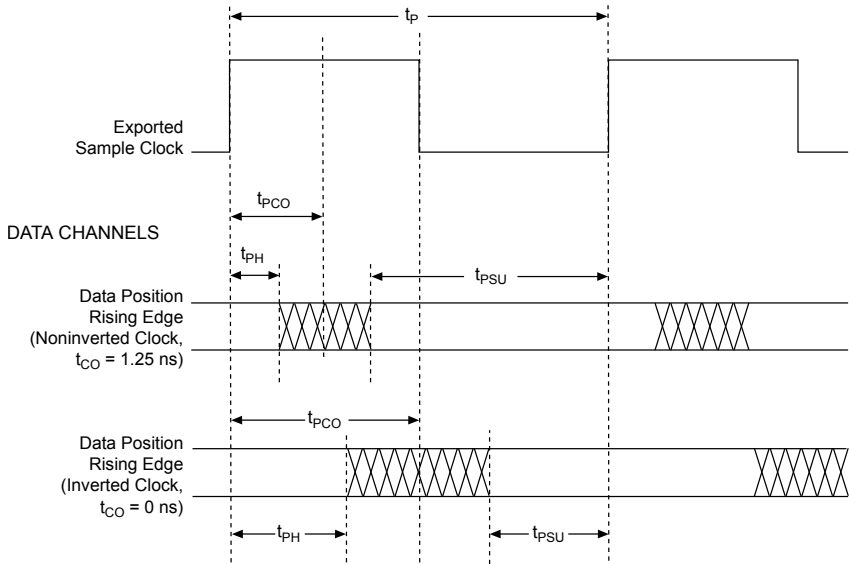

$$t_p = \frac{1}{f} = \text{Period of Sample Clock}$$

$t_{PH}$  = Provided Hold Time

$t_{PSU}$  = Provided Setup Time


$t_{PCO}$  = Time from Rising Clock Edge to Data Transition (Provided Clock to Out Time)

$t_{CO}$  = Exported Sample Clock Offset



**Note** Provided setup and hold times account for maximum channel-to-channel skew and jitter.

**Figure 11. Generation Timing Diagram**

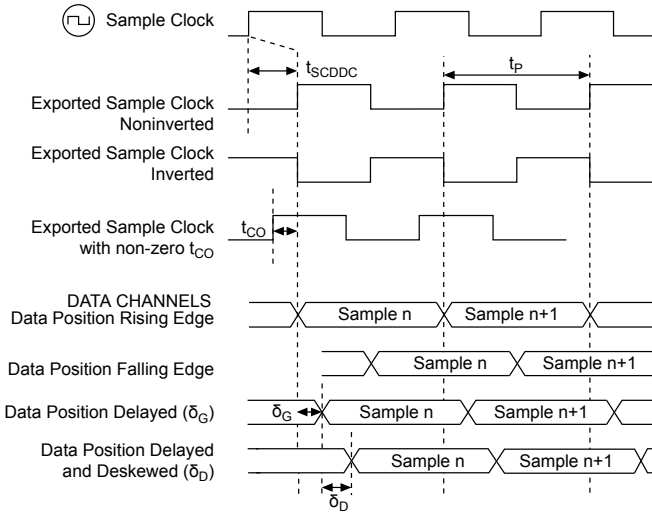

$t_{SCDDC}$  : Time Delay from Sample Clock (Internal) to DDC Connector  
 $-1 \leq \delta_G \leq 2$  : Pattern Generation Channel Data Delay (Fraction of  $t_p$ )  
 $t_p = \frac{1}{f}$  = Period of Sample Clock  
 $t_{CO}$  = Exported Sample Clock Offset  
 $\delta_D$  = Pattern Generation Channel Deskew (Time)


## Acquisition Timing

Channels	Data
	STROBE
	PFI <0..3>
Maximum data rate per channel	200 Mbps
Channel-to-channel skew	725 ps, maximum 300 ps, characteristic



**Note** There will be additional skew from crosstalk, acquisition threshold, overdrive, dispersion, and transmission line effects. You may see up to 175 ps of additional skew from differences between channels in the average rate of pattern transitions.

**Figure 12.** Typical Overdrive Dispersion Adjustment

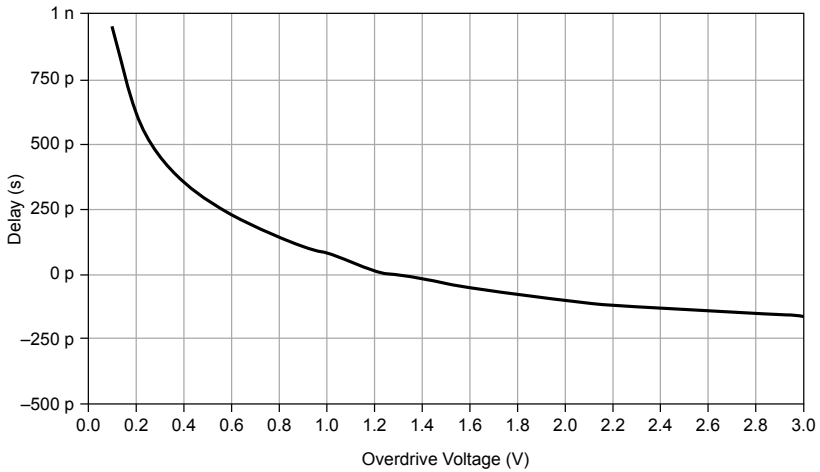

**Note** Timing calibration executes with 1.25 V of overdrive.

Data position modes

- Sample clock rising edge
- Sample clock falling edge
- Delay from Sample clock rising edge

Acquisition data

Delay and deskew frequency	
On Board clock	All supported frequencies
External clock	Frequencies $\geq 20$ MHz
Delay range	-1 to 2 Sample clock cycles, expressed as a fraction of the Sample clock period
Deskew range	-2 to 3 Sample clock cycles, expressed as a time in seconds
Delay and deskew resolution	30 ps



**Note** The sum of data delay and data deskew may not exceed -2 to 3 Sample clock cycles.

# Setup and Hold Times to STROBE

## Setup time to STROBE ( $t_{SUS}$ )

$f < 20$ MHz	2.18 ns
$f \geq 20$ MHz	1.82 ns

## Hold time to STROBE ( $t_{HS}$ )


$f < 20$ MHz	3.18 ns
$f \geq 20$ MHz	1.41 ns



**Note** Setup and hold times include maximum data channel-to-channel skew but do not include system crosstalk. 1.65 V overdrive on all channels. Overall performance may vary with system crosstalk performance.

The following diagram illustrates the relationship between the exported Sample clock mode and the setup and hold times to STROBE.

**Figure 13.** Acquisition Timing Diagram Using STROBE as the Sample Clock

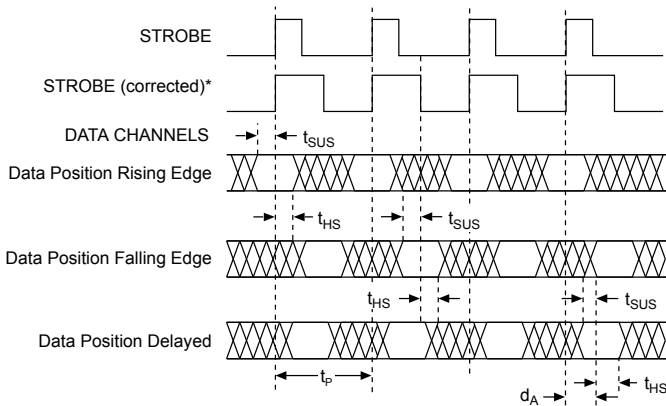

$t_{SUS}$  = Setup Time to STROBE

$t_{HS}$  = Hold Time from STROBE


$-1 \leq d_A \leq 2$ : Acquisition Data Delay (fraction of  $t_p$ )

$t_p = \frac{1}{f}$  = Sample Clock Period

\*Note: When using an external Sample clock greater than 20 MHz, the duty cycle is corrected to 50%.



**Figure 14. Acquisition Timing Diagram with Sample Clock Sources Other than STROBE**

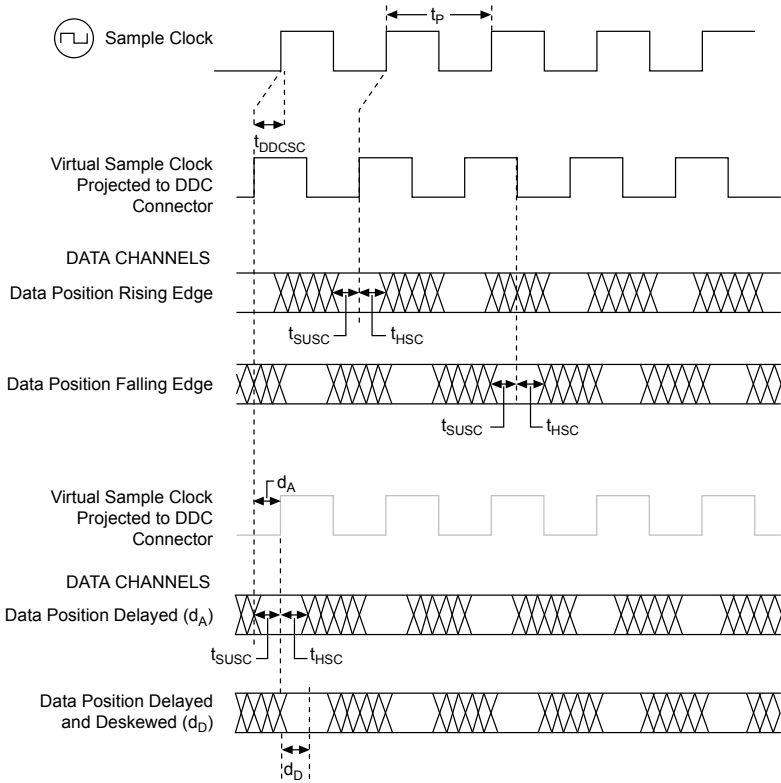

$t_{DDCSC}$ : Time Delay from DDC Connector or to Internal Sample Clock

$-1 \leq \delta_A \leq 2$ : Pattern Acquisition Channel Data Delay (Fraction of  $t_p$ )

$t_p = \frac{1}{f}$  = Period of Sample Clock

$t_{SUSC}$  = Setup Time to Sample Clock

$t_{HSC}$  = Hold Time to Sample Clock

$\delta_D$  = Pattern Acquisition Channel Deskew (Time)

## CLK IN

Connector	SMA jack
Direction	Input
Destinations	1. Reference clock (for the phase-locked loop [PLL]) 2. Sample clock

## Input

Coupling	AC
Protection	±10 VDC, nominal
Impedance	Software-selectable: 50 Ω (default) or 1 kΩ, nominal
Minimum detectable pulse width	2 ns
Clock requirements	Free-running (continuous) clock
Clock square wave ranges <sup>18</sup>	
Voltage	300 mV <sub>pk-pk</sub> to 5.5 V <sub>pk-pk</sub> , nominal
Frequency	20 kHz to 200 MHz, nominal
Duty cycle	40% to 60%, nominal
Clock sine wave ranges	
0 dBm	
Voltage	630 mV <sub>pk-pk</sub> to 5.5 V <sub>pk-pk</sub>
Frequency	10 MHz to 200 MHz
6 dBm	
Voltage	1.265 V <sub>pk-pk</sub> to 5.5 V <sub>pk-pk</sub>
Frequency	5 MHz to 200 MHz
12 dBm	
Voltage	2.53 V <sub>pk-pk</sub> to 5.5 V <sub>pk-pk</sub>
Frequency	2.5 MHz to 200 MHz

## PFI 5 as STROBE

Connector	DDC
Direction	Input
Destination	Sample clock (acquisition only)
Frequency range	800 Hz to 200 MHz

<sup>18</sup> 3 dB cutoff point at 125 MHz when using 1 kΩ input impedance.

## Duty cycle range<sup>19</sup>

$f < 20$ MHz	25% to 75%
$f \geq 20$ MHz	40% to 60%



**Note** STROBE duty cycle is corrected to 50% at  $f \geq 20$  MHz.

## Minimum detectable pulse width<sup>19</sup>

2 ns

## Clock requirements

Free-running (continuous) clock

## Related Information

[Digital Acquisition Channels](#) on page 5

## PXIe\_DStarA

Connector	PXI Express backplane
Direction	Input
Destinations	1. Reference clock (for the PLL) 2. Sample clock
Frequency range	800 Hz to 200 MHz
Duty cycle range	40% to 60%
Clock requirements	Free-running (continuous) clock

## CLK OUT

Connector	SMA jack
Direction	Output
Sources	1. Sample clock (excluding STROBE) 2. Reference clock (PLL)
Generation voltage level <sup>20</sup>	
Low voltage levels, characteristic	0 V, nominal
High voltage levels, characteristic	3.3 V, nominal
Drive strength	$\pm 33$ mA
Output impedance	50 $\Omega$ , nominal

<sup>19</sup> At the programmed voltage input high ( $V_{IH}$ ) threshold.

<sup>20</sup> For the low and high generation voltage levels representative of an average unit operating at room temperature.

## Output protection

Range	0 V and 5 V
Duration	Indefinite

## PFI 4 as DDC CLK OUT

Connector	DDC
Direction	Output
Source	Sample clock (generation only)



**Note** STROBE and acquisition Sample clock cannot be routed to DDC CLK OUT.

### Related Information

[Digital Generation Channels](#) on page 4

## Reference Clock (PLL)

Sources<sup>21</sup>

1. PXI\_CLK100 (PXI Express backplane)
2. CLK IN (SMA jack connector)
3. PXIe\_DStarA (PXI Express backplane)
4. None (internal oscillator locked to an internal reference)

### Frequency

Range	5 MHz to 100 MHz (integer multiples of 1 MHz)
Accuracy	<5,000 ppm (required accuracy of the external Reference clock source)
Lock time	≤25 ms, not including software latency
Duty cycle range	40% to 60%
Destination	CLK OUT (SMA jack connector)

<sup>21</sup> Provides the reference frequency for the PLL.

# Waveform

---

## Memory and Scripting

### Memory architecture

The PXIe-6555 uses the Synchronization and Memory Core (SMC) technology in which waveforms and instructions share onboard memory. Parameters such as number of script instructions, maximum number of waveforms in memory, and number of samples available for waveform storage are flexible and user defined.

---

### Onboard memory size<sup>22</sup>

8 Mbit/channel

Acquisition

8 Mbit/channel (32 MBytes total)

Generation

8 Mbit/channel (32 MBytes total)

---

### Generation

Single-waveform mode

Generates a single waveform once,  $n$  times, or continuously

Scripted mode<sup>23</sup>

Generates a simple or complex sequence of waveforms

Finite repeat count

1 to 16,777,216

Waveform quantum

Data width = 4

1 sample

Data width = 2

2 samples

Waveform block size (in physical memory)<sup>24</sup>

Data width = 4

32 samples

Data width = 2

64 samples

---

<sup>22</sup> Maximum limit for generation sessions assumes no scripting instructions.

<sup>23</sup> Use scripts to describe the waveforms to be generated, the order in which the waveforms are generated, how many times the waveforms are generated, and how the device responds to Script triggers.

<sup>24</sup> Regardless of waveform size, NI-HSDIO allocates waveforms in blocks of physical memory.

**Table 5.** Generation Minimum Waveform Size, Samples (S)<sup>25</sup>

Configuration	Sample Rate	
	200 MHz	100 MHz
Single waveform	1 S	1 S
Continuous waveform	128 S	64 S
Stepped sequence	128 S	64 S
Burst sequence	1,056 S	512 S

#### Acquisition

Minimum record size <sup>26</sup>	1 sample
Record quantum	1 sample
Total records <sup>27</sup>	2,147,483,647
Total pre-Reference trigger samples	0 up to full record
Total post-Reference trigger samples	0 up to full record

#### Hardware compare

Error FIFO depth	4,094
Number of unique enable states	255
Maximum speed	200 MHz

## Calibration

Warm-up time	30 minutes from driver loaded
External calibration interval	1 year

## Software

### Driver Software

Driver support for this device was first available in NI-HSDIO 1.9.

NI-HSDIO is an IVI-compliant driver that allows you to configure, control, and calibrate the PXIe-6555. NI-HSDIO provides application programming interfaces for many development environments.

<sup>25</sup> Sample rate dependent. Increasing sample rate increases minimum waveform size requirement.

<sup>26</sup> Regardless of waveform size, NI-HSDIO allocates at least 640 bytes for a record.

<sup>27</sup> The session should fetch quickly enough that unfetched data is not overwritten.

## Application Software

NI-HSDIO provides programming interfaces, documentation, and examples for the following application development environments:

- LabVIEW
- LabWindows™/CVI™
- Measurement Studio
- Microsoft Visual C/C++
- .NET (C# and VB.NET)

## NI Measurement Automation Explorer

NI Measurement Automation Explorer (MAX) provides interactive configuration and test tools for the PXIe-6555. MAX is included on the NI-HSDIO media.

## Power

Usage Profile <sup>28</sup>	Current Draw, by Voltage		Total Power
	3.3 V	12 V	
3.3 V swing at 200 Mbps	4.1 A	4.5 A	67.5 W
5.0 V swing at 100 Mbps	4.0 A	4.3 A	64.8 W
8.0 V swing at 50 Mbps	3.8 A	4.3 A	64.1 W
3.3 V swing at 100 Mbps with active load set to 24 mA	4.5 A	4.7 A	71.5 W
Device maximums <sup>29</sup>	5.7 A	5.2 A	76 W

## Physical

Dimensions	Dual 3U CompactPCI Express slot, PXI Express compatible 21.6 cm × 2.0 cm × 13.0 cm
Weight	793 g (28 oz)

<sup>28</sup> Typical results are commensurate with an aggressive user application using all data channels into a high-impedance load with active loads disabled (unless otherwise noted) across temperature.

<sup>29</sup> Maximum values prior to device shutdown, requiring subsequent reset of the device.

## I/O Panel Connectors

Signal	Connector Type	Description
CLK IN	SMA jack	External Sample clock, external Reference clock
PFI 0		Events, triggers
CLK OUT		External Sample clock, exported Reference clock
REMOTE SENSE	68-pin VHDCI	PPMU remote sensing channels, external force, external sense, analog calibration
Digital Data & Control (DDC)		Digital data channels, PPMU channels, exported Sample clock, STROBE, events, triggers

## Environment



**Note** To ensure that the PXIe-6555 cools effectively, follow the guidelines in the *Maintain Forced Air Cooling Note to Users* included with the PXIe-6555 or available at [ni.com/manuals](http://ni.com/manuals). The PXIe-6555 is intended for indoor use only.

Operating temperature	0 °C to 45 °C in all NI PXI Express and hybrid NI PXI Express chassis (meets IEC 60068-2-2)
Operating relative humidity	10 to 90% relative humidity, noncondensing (meets IEC 60068-2-56)
Storage temperature	-20 °C to 70 °C (meets IEC 60068-2-2)
Storage relative humidity	5 to 95% relative humidity, noncondensing (meets IEC 60068-2-56)
Operating shock	30 g, half-sine, 11 ms pulse (meets IEC 60068-2-27; test profile developed in accordance with MIL-PRF-28800F)
Operating vibration	5 Hz to 500 Hz, 0.3 g <sub>rms</sub> (meets IEC 60068-2-64)
Storage shock	50 g, half-sine, 11 ms pulse (meets IEC 60068-2-27; test profile developed in accordance with MIL-PRF-28800F)



Storage vibration	5 Hz to 500 Hz, 2.46 g <sub>rms</sub> (meets IEC 60068-2-64; test profile exceeds requirements of MIL-PRF-28800F, Class B)
Altitude	0 to 2,000 m above sea level (at 25 °C ambient temperature)
Pollution degree	2

## Compliance and Certifications

### Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



**Note** For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

### Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



**Note** In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



**Note** For EMC declarations, certifications, and additional information, refer to the [Online Product Certification](#) section.



**Caution** Refer to the *Read Me First: Safety and Electromagnetic Compatibility* document for important safety and electromagnetic compatibility information. To obtain a copy of this document online, visit [ni.com/manuals](https://ni.com/manuals) and search for the document title.



**Caution** To ensure the specified EMC performance, operate this product only with shielded cables and accessories. Do not use unshielded cables or accessories unless they are installed in a shielded enclosure with properly designed and shielded input/output ports and connected to the product using a shielded cable. If unshielded cables or accessories are not properly installed and shielded, the EMC specifications for the product are no longer guaranteed.



**Caution** To ensure the specified EMC performance, the length of all I/O cables must be no longer than 3 m (10 ft).



**Caution** To ensure the specified EMC performance, you must install PXI EMC Filler Panels, National Instruments part number 778700-01, in all open chassis slots.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

## Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit [ni.com/certification](https://ni.com/certification), search by model number or product line, and click the appropriate link in the Certification column.

## Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at [ni.com/environment](https://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## Waste Electrical and Electronic Equipment (WEEE)



**EU Customers** At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](https://ni.com/environment/weee).

## 电子信息产品污染控制管理办法（中国 RoHS）



**中国客户** National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china).)

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at [ni.com/trademarks](http://ni.com/trademarks) for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at [ni.com/patents](http://ni.com/patents). You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at [ni.com/legal/export-compliance](http://ni.com/legal/export-compliance) for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2011—2017 National Instruments. All rights reserved.

376389A-01 November 3, 2017