



Power supply Block Diagram

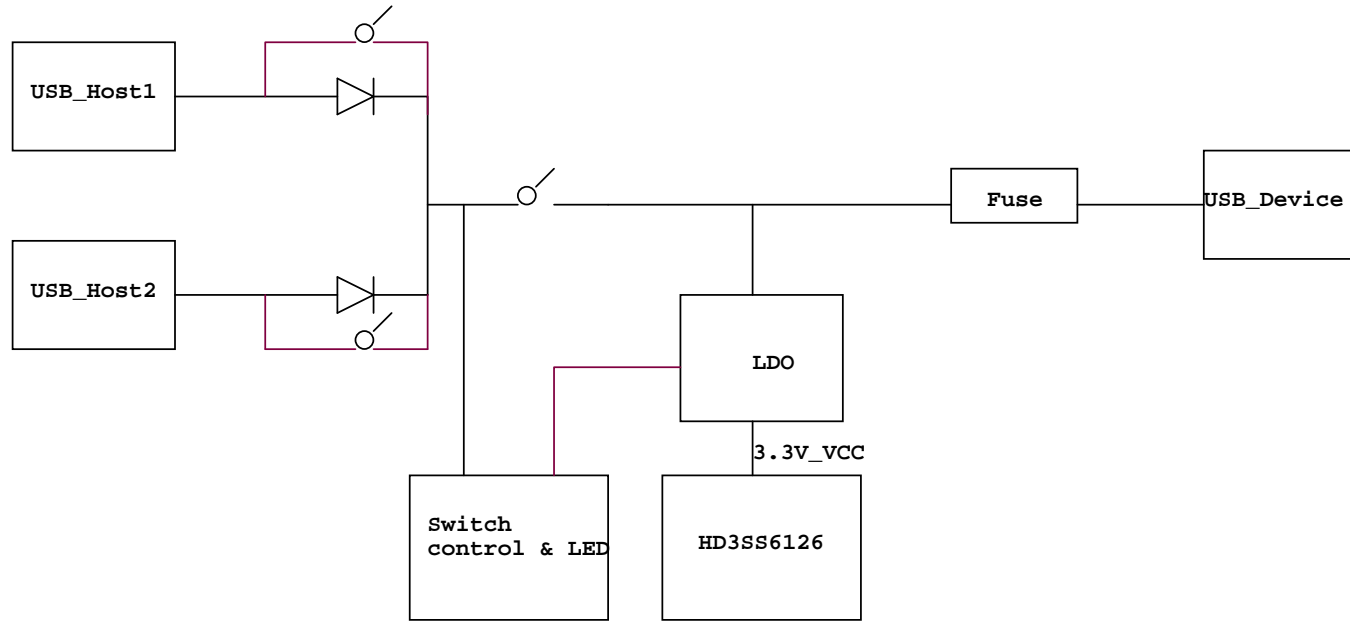

Title		
HD3SS612x 2 to 1 switch		
Size	Document Number	Rev
A4	<Doc>	1.0
Date:	Monday, September 30, 2013	Sheet 1 of 4

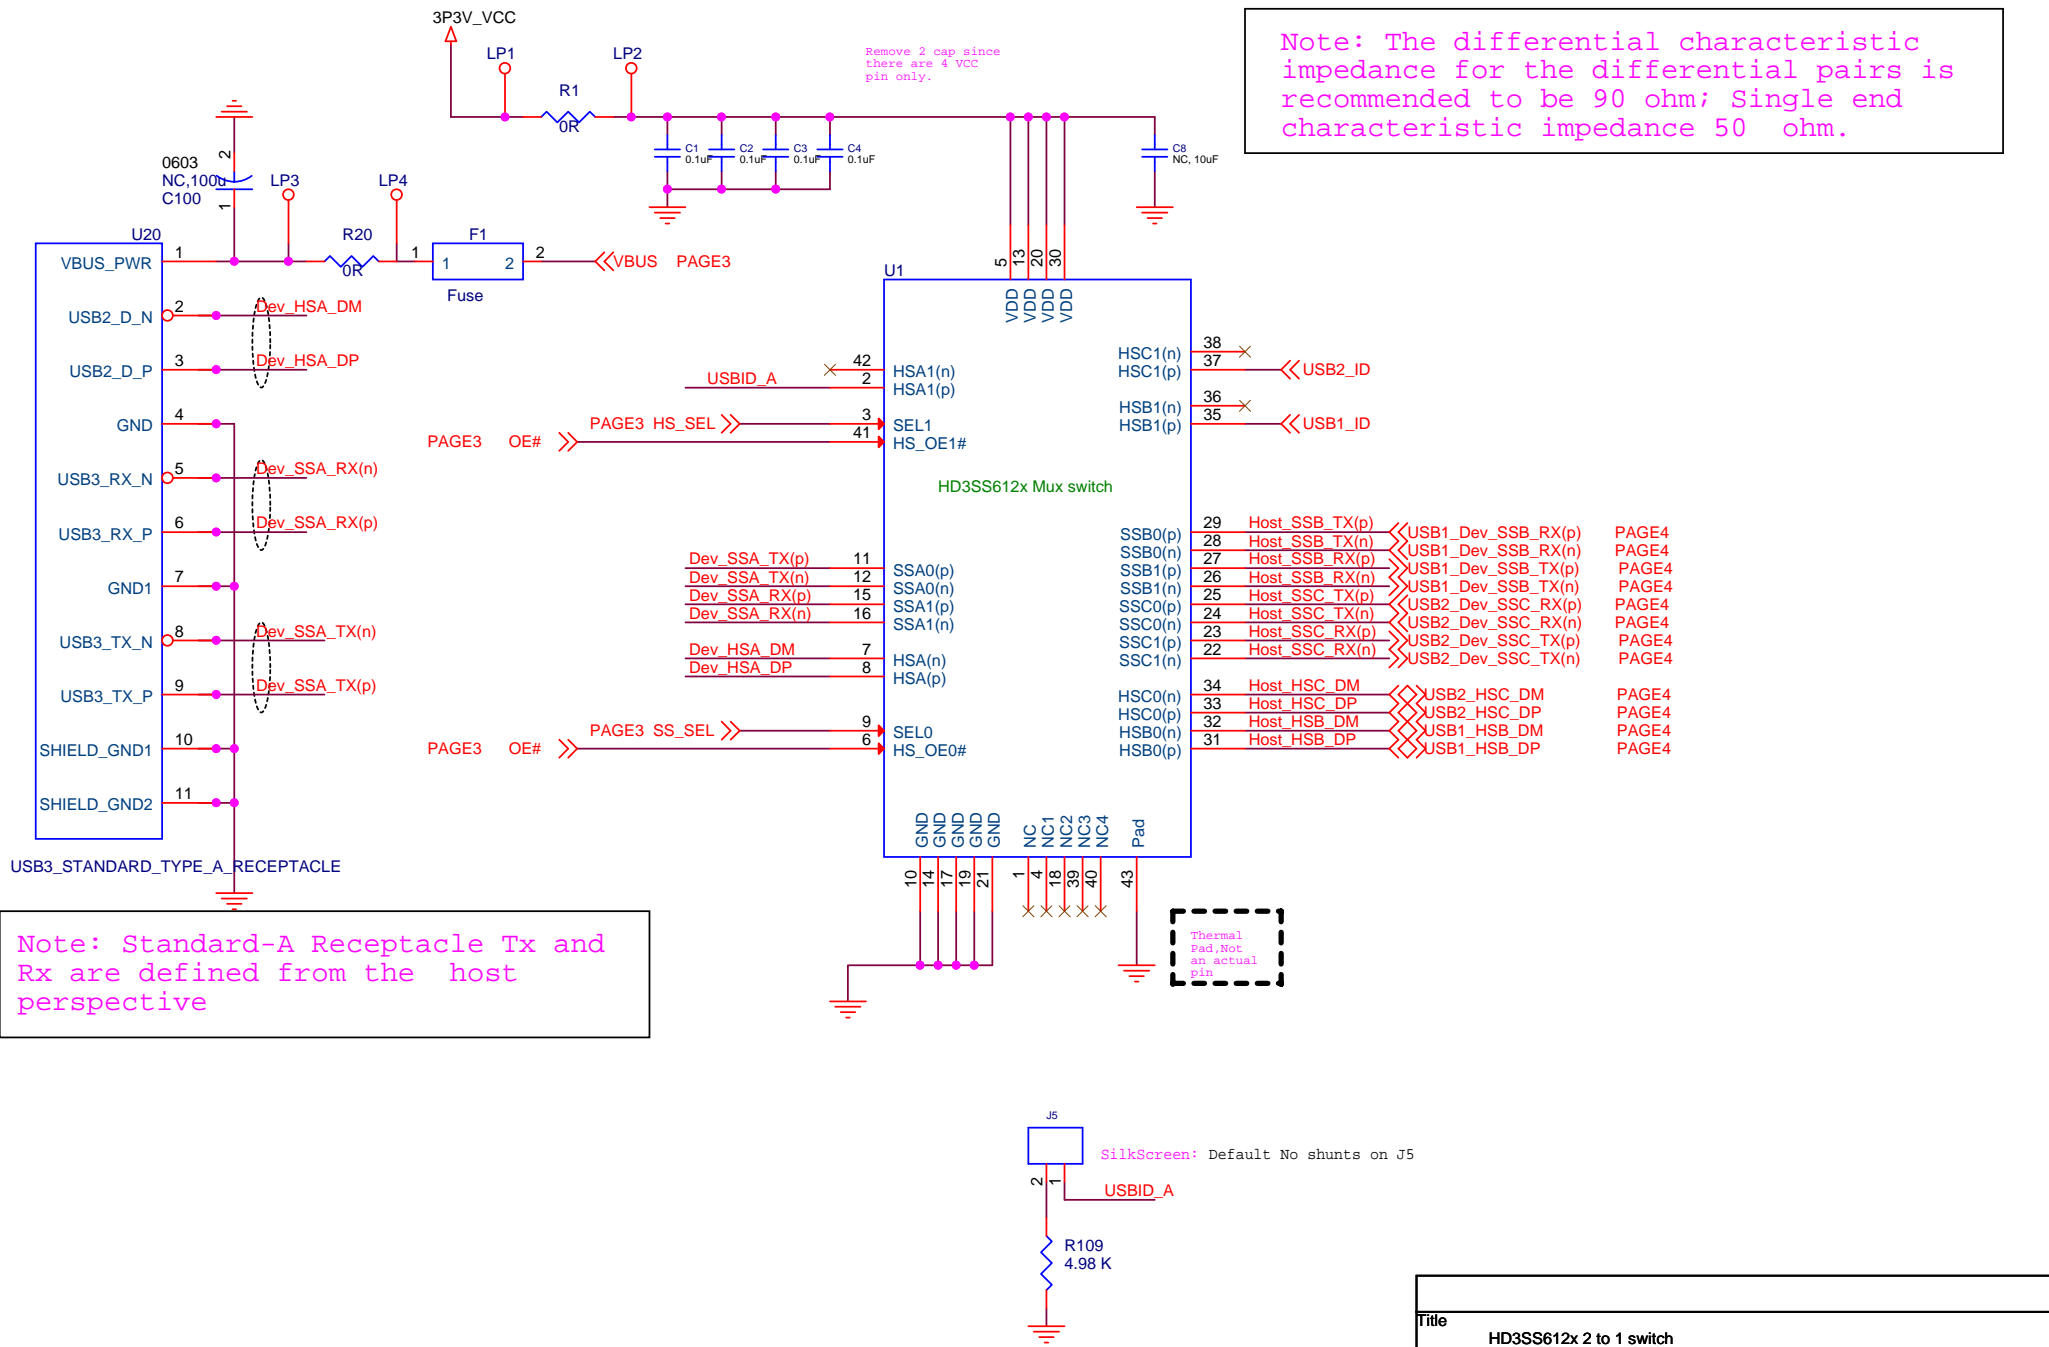


Note: The differential characteristic impedance for the differential pairs is recommended to be 90 ohm; Single end characteristic impedance 50 ohm.

Note: Standard-A Receptacle Tx and Rx are defined from the host perspective

Thermal Pad, Not an actual pin


SilkScreen: Default No shunts on J5

Title		
HD3SS612x 2 to 1 switch		
Size	Document Number	Rev
A4	<Doc>	1.0
Date:	Monday, September 30, 2013	Sheet 2 of 4

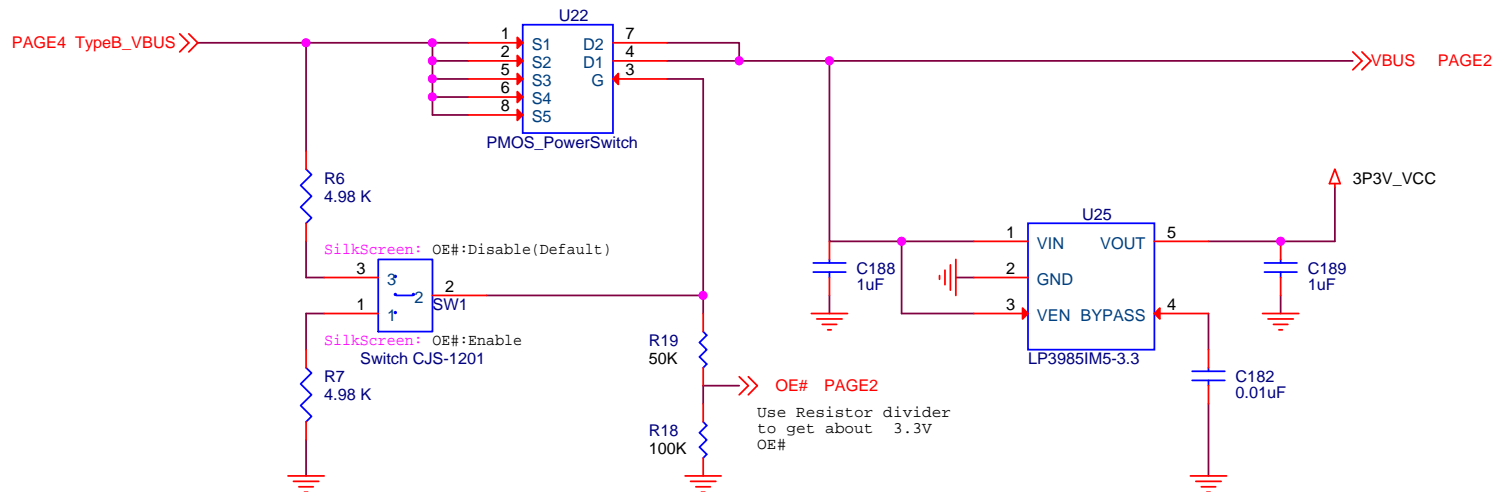


Note: This voltage should be from the LDO.

Note: This voltage should be from the LDO.

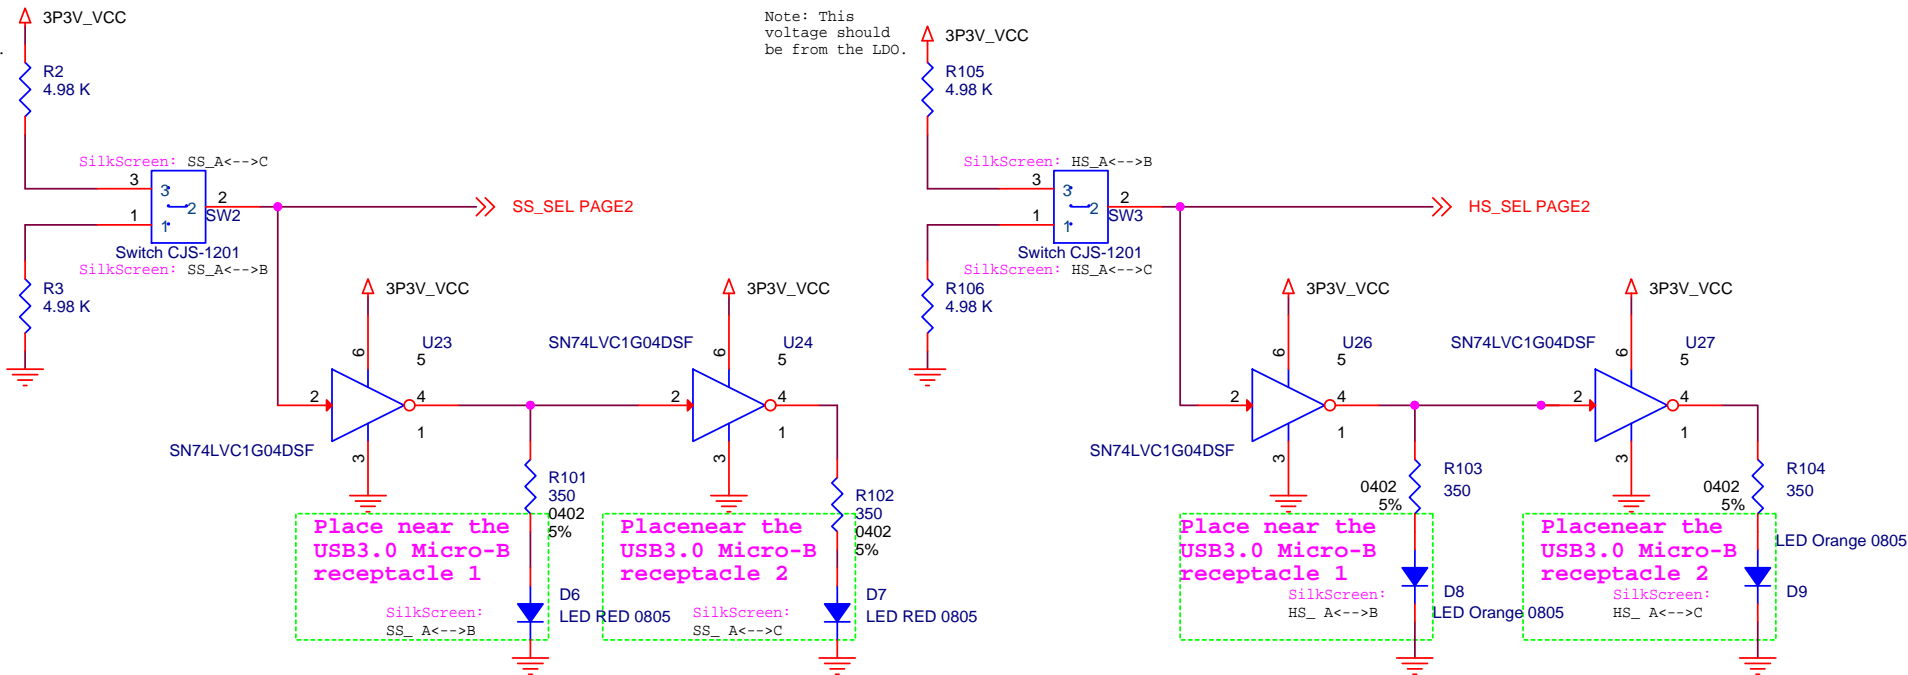

Title		
HD3SS612x 2 to 1 switch		
Size	Document Number	Rev
A4	<Doc>	1.0
Date:	Monday, September 30, 2013	Sheet 3 of 4

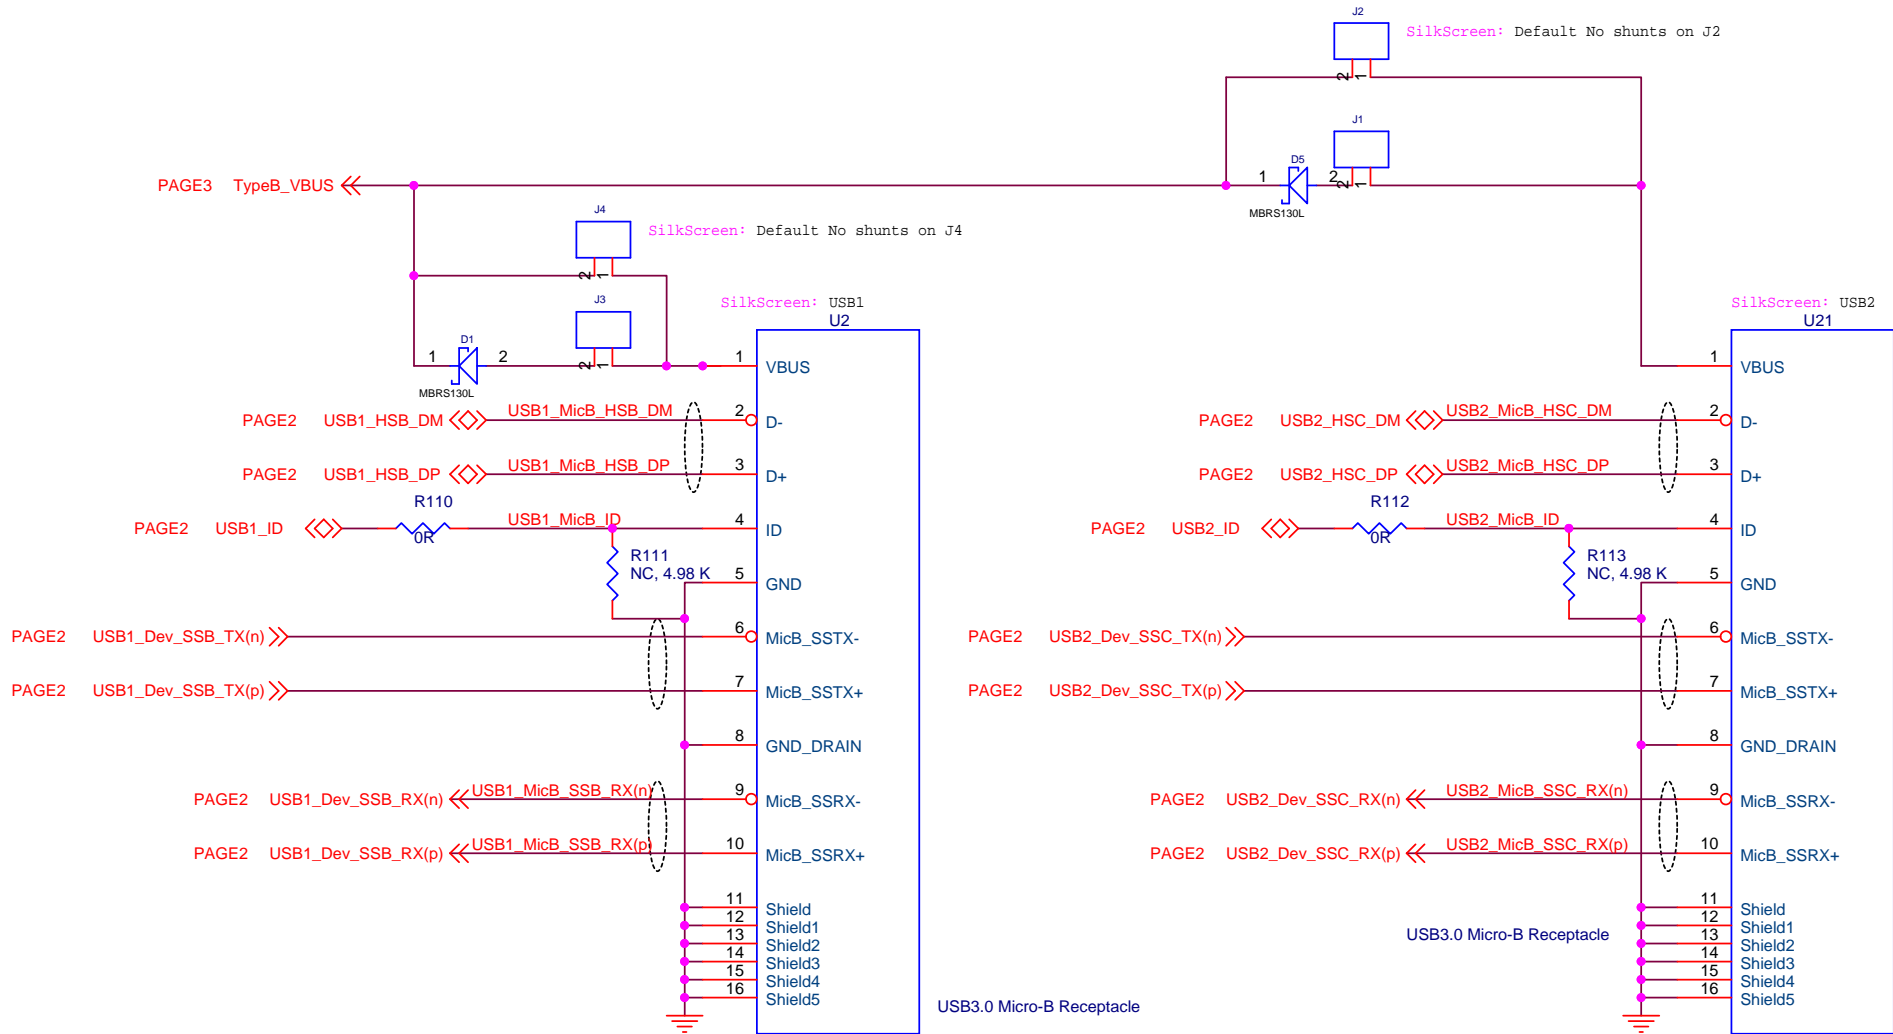

Title		
HD3SS612x 2 to 1 switch		
Size	Document Number	Rev
A4	<Doc>	1.0
Date:	Monday, September 30, 2013	Sheet 4 of 4