RS232 MULTIPLEXING

RS232 FROM IMU TO B038

ODBII RS232



RS232 FROM PHYTEC TO B038

DEBUG RS232



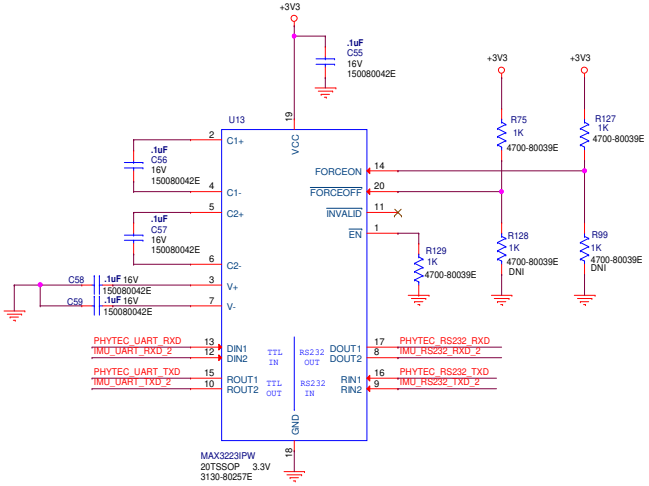

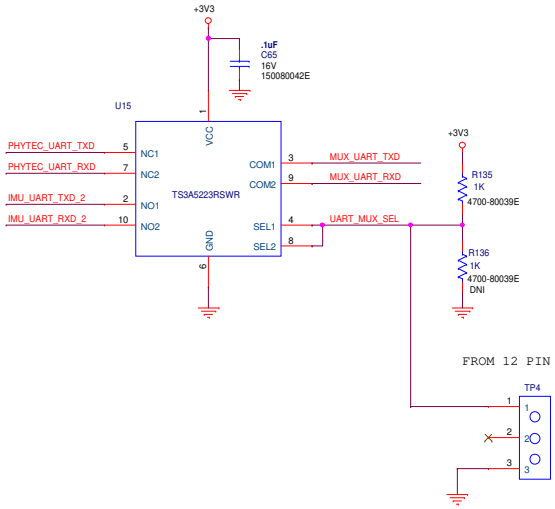

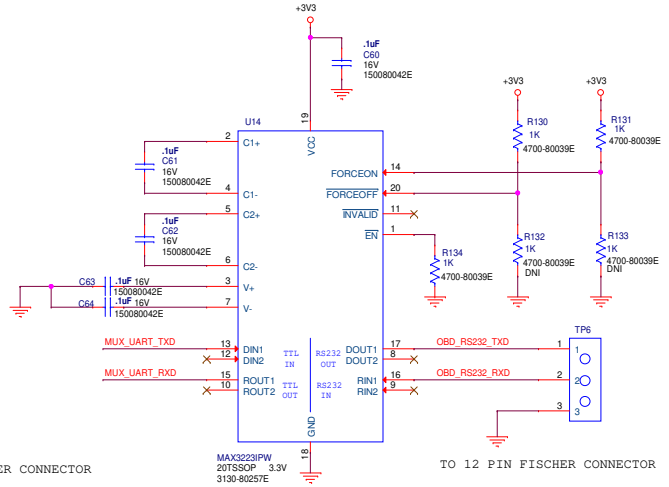

Logic low voltage on SEL1 or SEL2 pins connect the COM pin to NC pin

Logic high voltage on SEL1 or SEL2 pins connect the COM pin to NO pin (Default)

Celliber Technologies
Vyshak Center, 2nd floor, No.1027, 24th Main
11th Cross, Sector I, HSR layout, Bangalore
560102, India

B036			Sheet 7 of 7
07- UART/RS232 Multiplexing			
Size C	Drawing No. 1000-B036	Rev. 0.992	Date changed Wednesday, October 03, 2018

This drawing is the property of Celliber and may not be reproduced or used without written permission.