


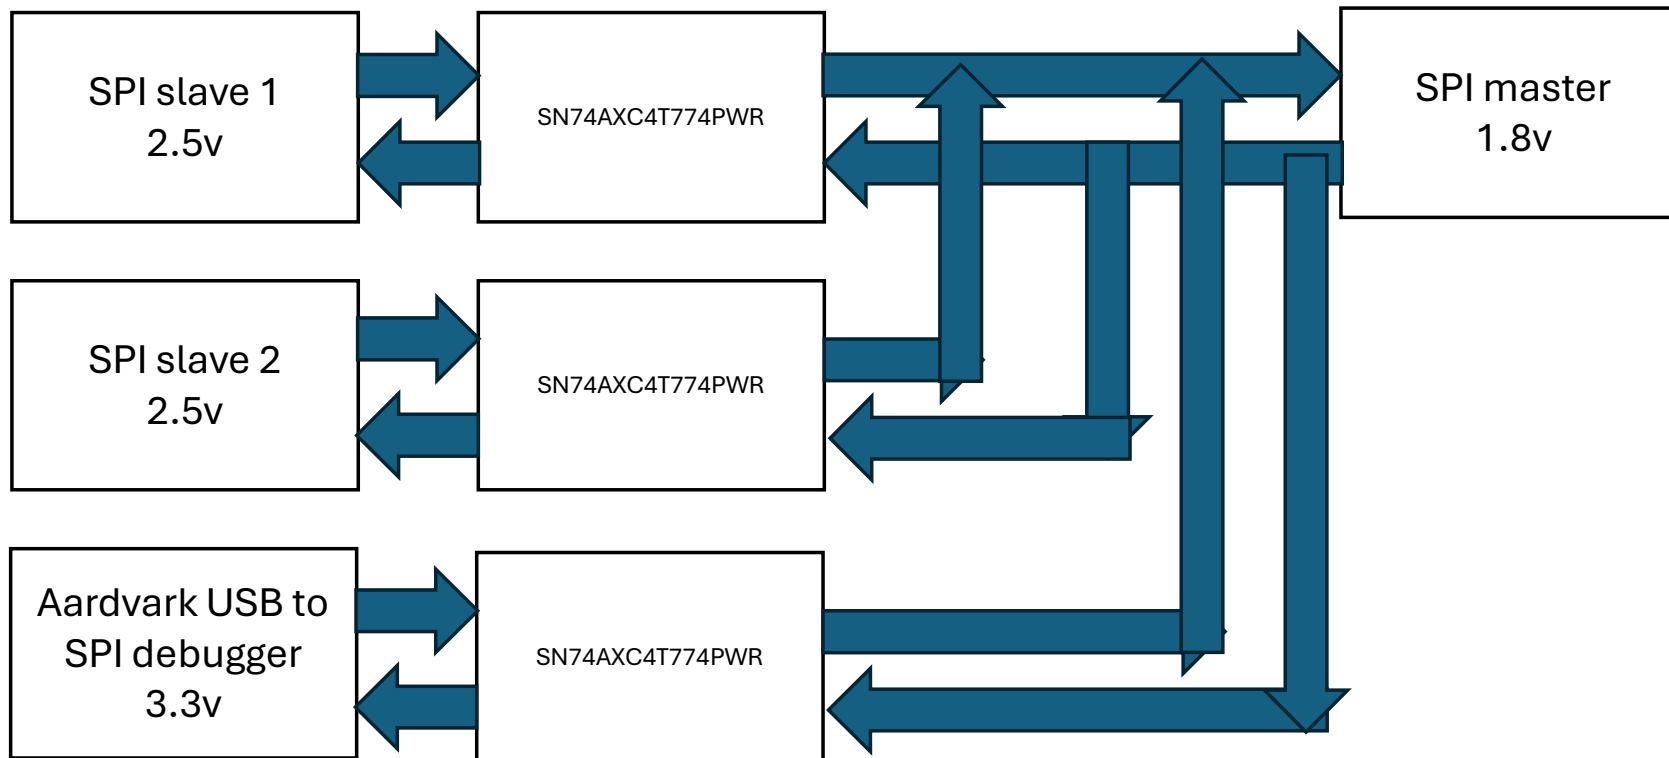

X2 separate SN74AXC4T774PWR used to
make life easier with the CS signal for the
2.5v slaves