


WEBENCH® Design Report

Design : 1221535/119 LM25085MY/NOPB
LM25085MY/NOPB 30.0V-40.0V to 27.6V @ 0.6A

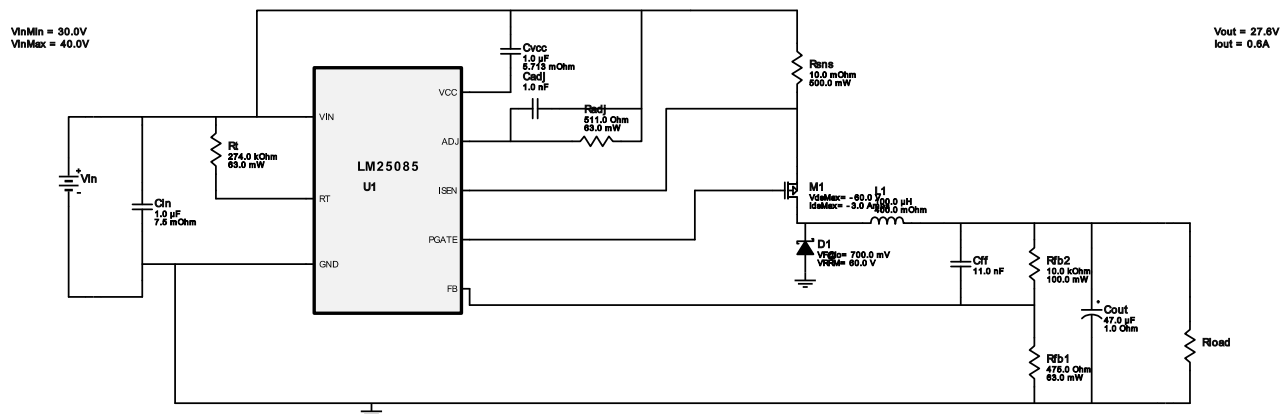


Electrical BOM


#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cadj	Yageo America	CC0805KRX7R9BB102 Series= X7R	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7mm2
2.	Cff	MuRata	GRM3195C1H113JA01D Series= C0G/NP0	Cap= 11.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.11	 1206 11mm2
3.	Cin	TDK	C3216X7R2A105M160AA Series= X7R	Cap= 1.0 µF ESR= 7.5 mOhm VDC= 100.0 V IRMS= 5.923 A	1	\$0.11	 1206 11mm2
4.	Cout	United Chemi-Con	EMVY350ADA470MF55G Series= MVY	Cap= 47.0 µF ESR= 1.0 Ohm VDC= 35.0 V IRMS= 140.0 mA	1	\$0.12	 CAPSMT_62_F55 77mm2
5.	Cvcc	TDK	C1608X5R1C105K Series= 285	Cap= 1.0 µF ESR= 5.713 mOhm VDC= 16.0 V IRMS= 0.0 A	1	\$0.01	 1608 5mm2
6.	D1	Diodes Inc.	B160-13-F	VF@Io= 700.0 mV VRRM= 60.0 V	1	\$0.06	 SMA 37mm2
7.	L1	Bourns	SRN8040-101M	L= 100.0 µH DCR= 400.0 mOhm	1	\$0.21	 SRN8040 100mm2
8.	M1	Fairchild Semiconductor	FDC5614P	VdsMax= -60.0 V IdsMax= -3.0 Amps	1	\$0.22	 SOT-23-6 15mm2
9.	Radj	Vishay-Dale	CRCW0402511RFKED Series= CRCW..e3	Res= 511.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3mm2
10.	Rfb1	Vishay-Dale	CRCW0402475RFKED Series= CRCW..e3	Res= 475.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3mm2
11.	Rfb2	Vishay-Dale	CRCW060310K0FKEA Series= CRCW..e3	Res= 10.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5mm2

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
12.	Rsns	Stackpole Electronics Inc	CSR1206FK10L0 Series= ?	Res= 10.0 mOhm Power= 500.0 mW Tolerance= 1.0%	1	\$0.11	 1206 11mm2
13.	Rt	Vishay-Dale	CRCW0402274KFKED Series= CRCW...e3	Res= 274.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3mm2
14.	U1	Texas Instruments	LM25085MY/NOPB	Switcher	1	\$0.70	 MUY08A 24mm2


IC Tj

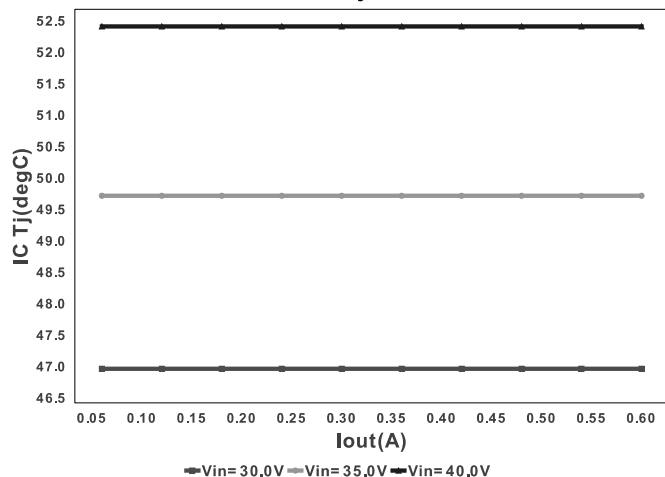


Duty Cycle

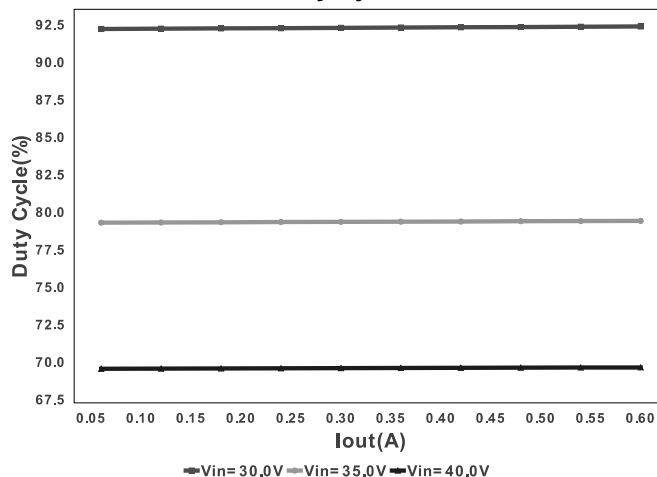


Cin IRMS

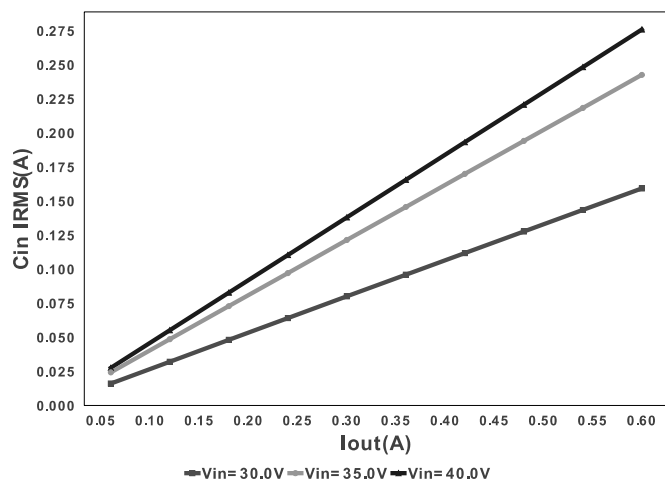


L Pd






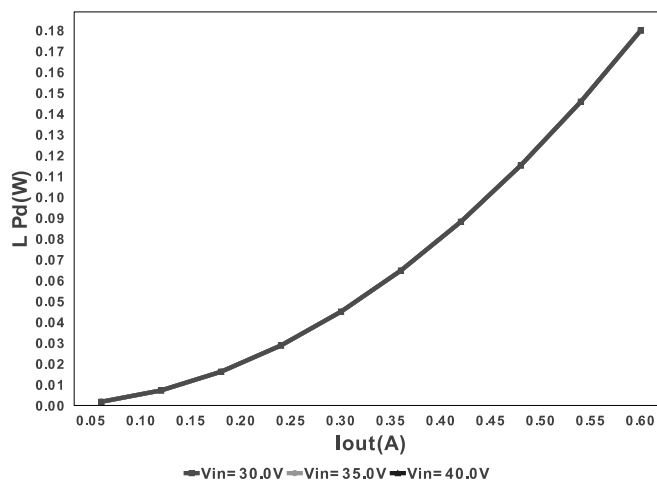








D1 Tj

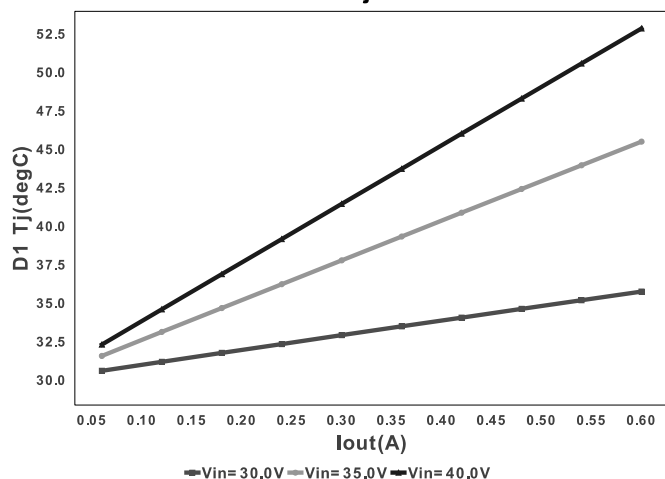


Efficiency

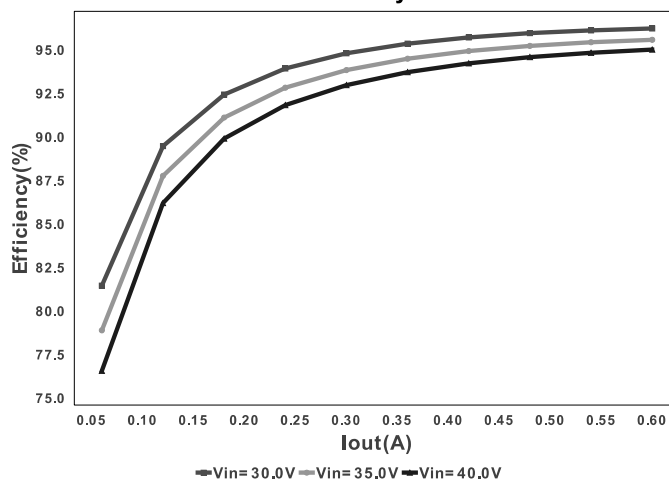

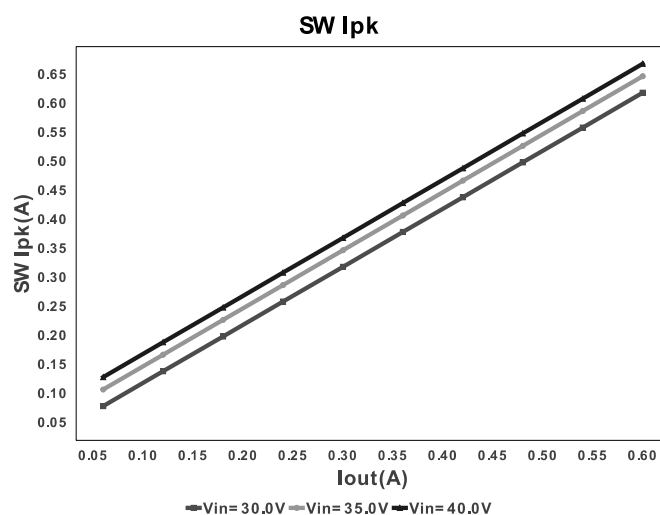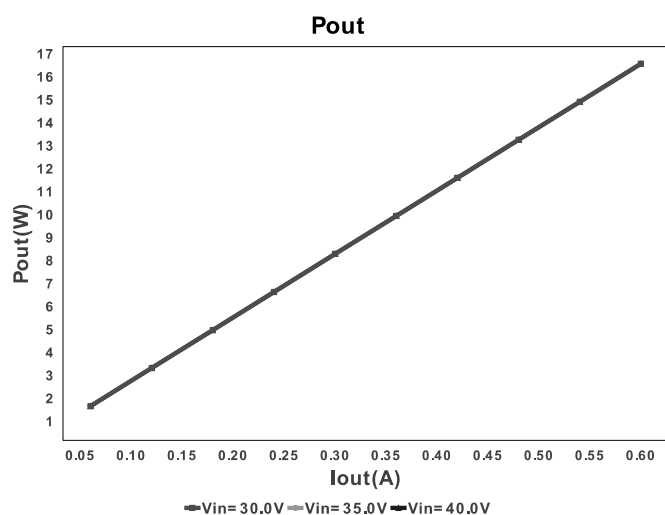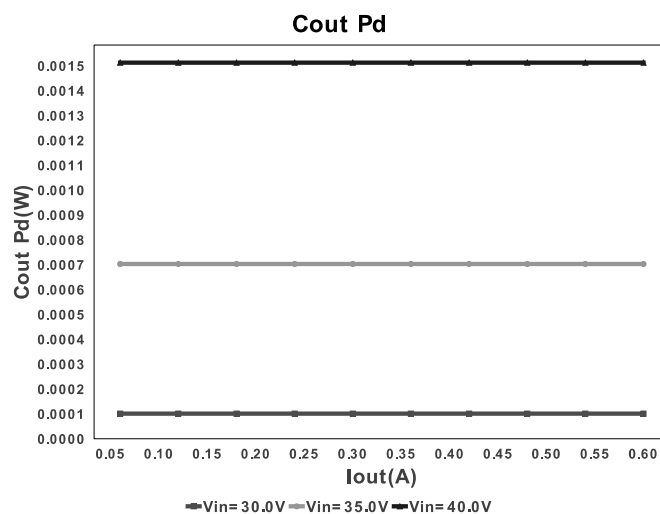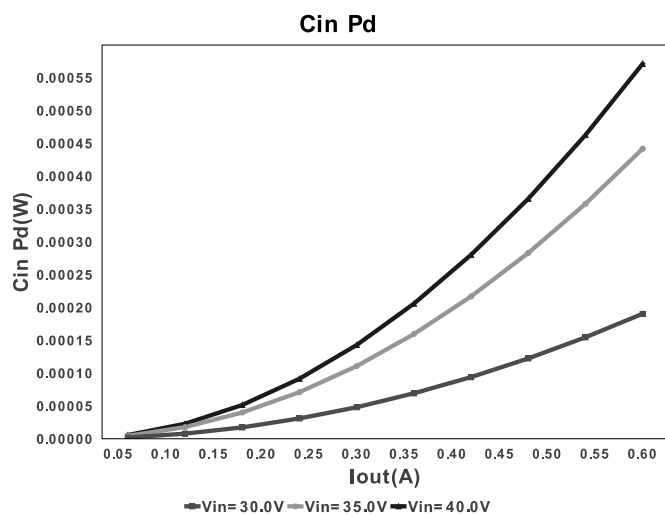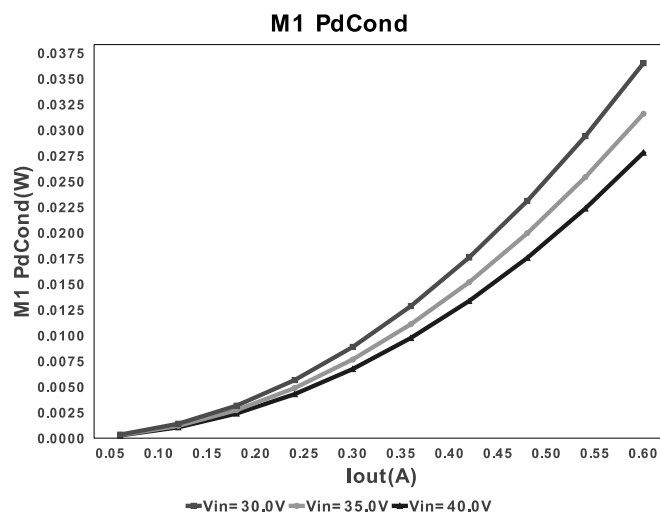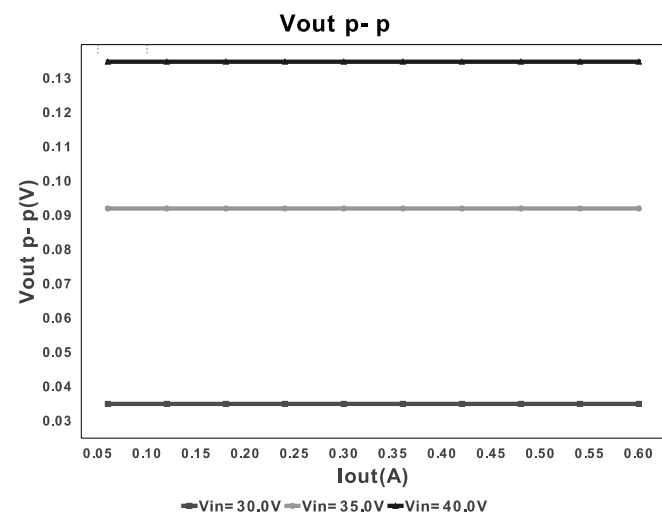

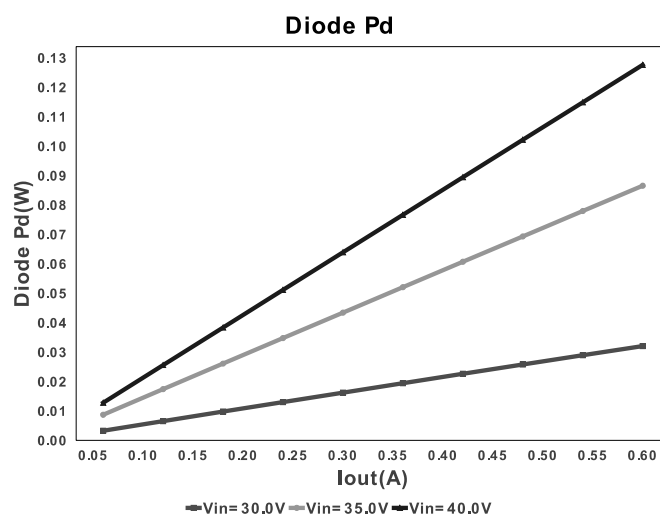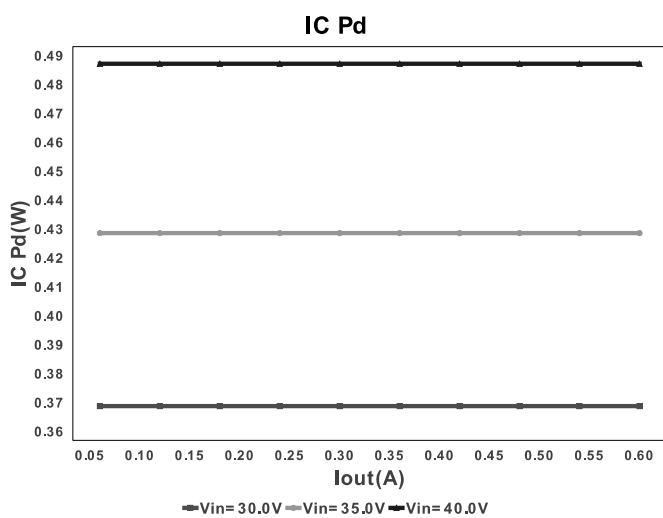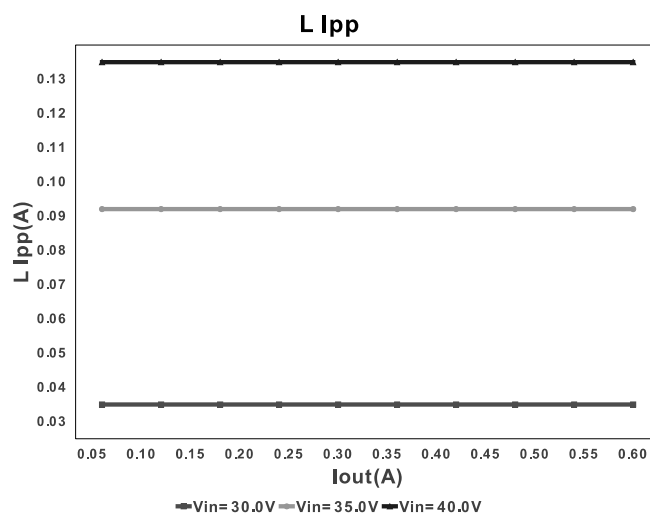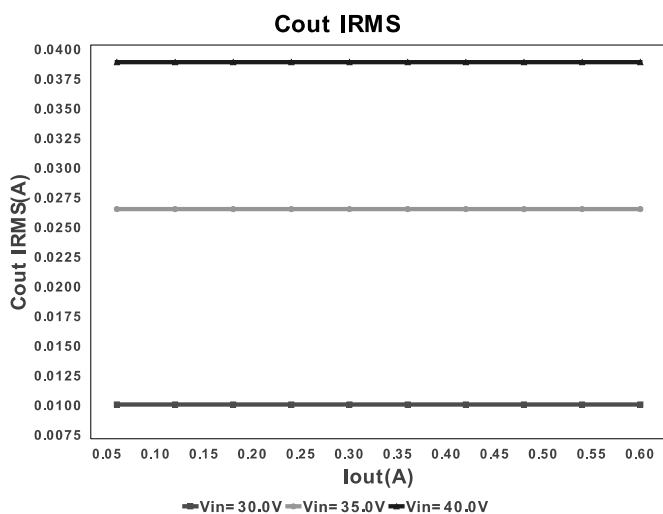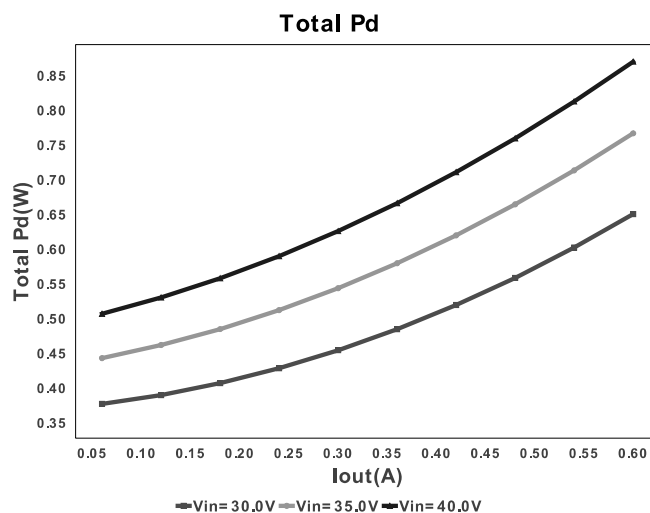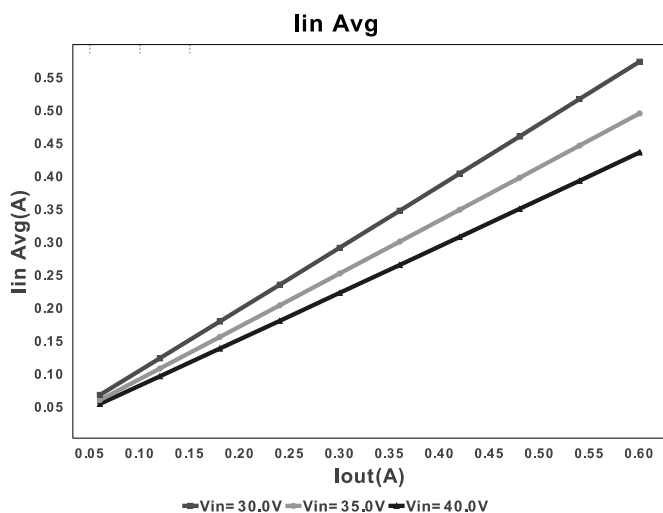

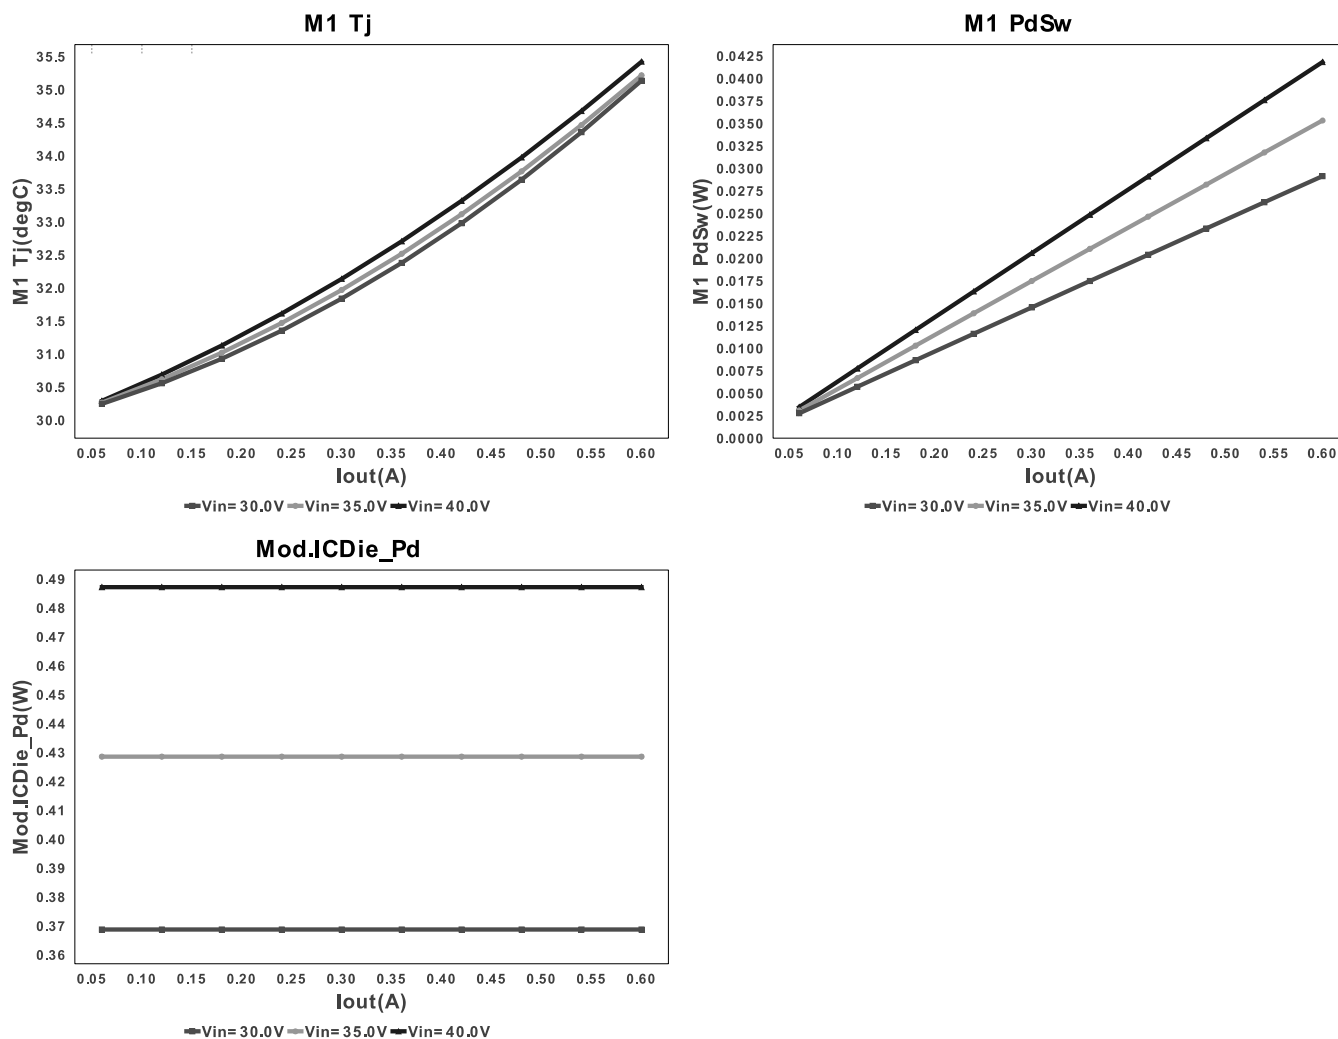

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	275.918 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	38.892 mA	Current	Output capacitor RMS ripple current
3.	Iin Avg	435.75 mA	Current	Average input current
4.	L Ipp	134.727 mA	Current	Peak-to-peak inductor ripple current
5.	SW Ipk	667.363 mA	Current	Peak switch current
6.	BOM Count	14	General	Total Design BOM count
7.	FootPrint	311.0 mm2	General	Total Foot Print Area of BOM components
8.	Frequency	607.123 kHz	General	Switching frequency
9.	IC Tolerance	25.0 mV	General	IC Feedback Tolerance
10.	Pout	16.56 W	General	Total output power
11.	Total BOM	\$1.7	General	Total BOM Cost
12.	D1 Tj	52.834 degC	Op_Point	D1 junction temperature
13.	Vout OP	27.6 V	Op_Point	Operational Output Voltage
14.	Duty Cycle	69.628 %	Op_point	Duty cycle
15.	Efficiency	95.009 %	Op_point	Steady state efficiency
16.	IC Tj	52.408 degC	Op_point	IC junction temperature
17.	ICThetaJA	46.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
18.	IOUT_OP	600.0 mA	Op_point	Iout operating point
19.	M1 Tj	35.421 degC	Op_point	M1 MOSFET junction temperature
20.	VIN_OP	40.0 V	Op_point	Vin operating point
21.	Vout p-p	134.728 mV	Op_point	Peak-to-peak output ripple voltage
22.	Cin Pd	570.982 μW	Power	Input capacitor power dissipation
23.	Cout Pd	1.513 mW	Power	Output capacitor power dissipation
24.	Diode Pd	127.563 mW	Power	Diode power dissipation
25.	IC Pd	487.129 mW	Power	IC power dissipation
26.	L Pd	180.0 mW	Power	Inductor power dissipation
27.	M1 PdCond	27.699 mW	Power	M1 MOSFET conduction losses
28.	M1 PdSw	41.812 mW	Power	M1 MOSFET switching losses
29.	Total Pd	869.931 mW	Power	Total Power Dissipation

Design Inputs

#	Name	Value	Description
1.	Iout	600.0 mA	Maximum Output Current
2.	Iout1	600.0 mAmps	Output Current #1
3.	VinMax	40.0 V	Maximum input voltage
4.	VinMin	30.0 V	Minimum input voltage
5.	Vout	27.6 V	Output Voltage
6.	Vout1	27.6 Volt	Output Voltage #1
7.	base_pn	LM25085	Base Product Number
8.	source	DC	Input Source Type
9.	Ta	30.0 degC	Ambient temperature

Design Assistance

1. For a Constant On Time device to be stable, we need to provide a ripple at the feedback comparator. There are various methods to implement the ripple. Depending on the circuit complexity vs. the allowable ripple, we have three options to choose from. The simplest option, 'Low Complexity', would require only a high ESR cap at the output. This means that the BOM count will be small, but the output voltage ripple will be quite large. The 'optimal solution' would require a feed-forward cap in parallel with the upper feedback resistor to AC couple the ripple to the feedback node. This increases the BOM count slightly, but now we have more control over the output voltage ripple. If the output voltage requirement is very tight, then the best option is to go for the 'Low Output Ripple' solution. In this option we can go with very low ESR output caps and have very good control over the output voltage ripple

2. **LM25085** Product Folder : <http://www.ti.com/product/lm25085> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to Texas Instruments' Site Terms and Conditions of Use. Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the Evaluation License Agreement.