


When a customer uses TPS65982 and BQ Battery Charger (for example BQ24780) in their application together, will ACDRV Pin of BQ Battery Charger be unused?
(Does TPS65982 perform a opening/closing of the FET of each power supply line?)



Figure79(in DataSheet)

[2]

Is there the circuit sample design when customer uses TP65982 and BQ Battery Charger together? Will you provide it to us if there is it?

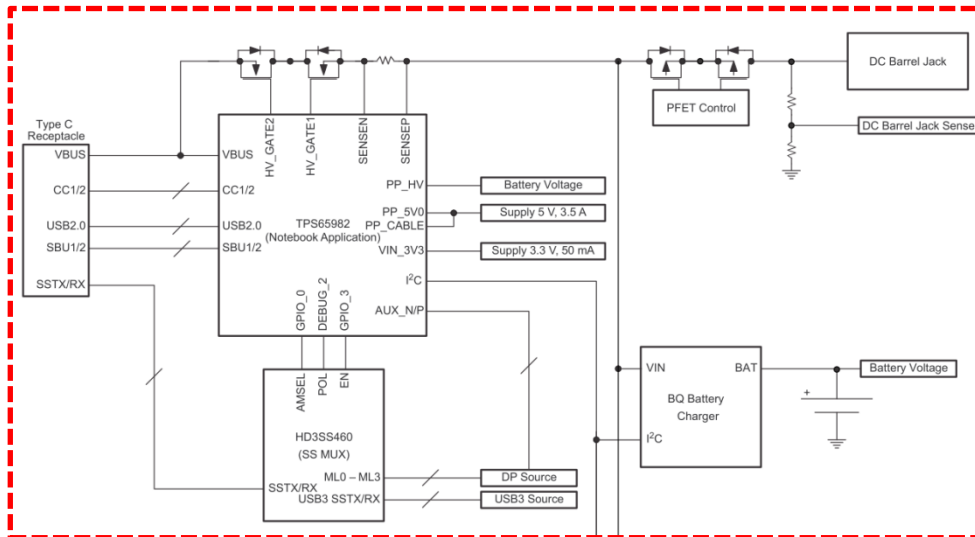

Is there the detailed circuit sample design of this point?

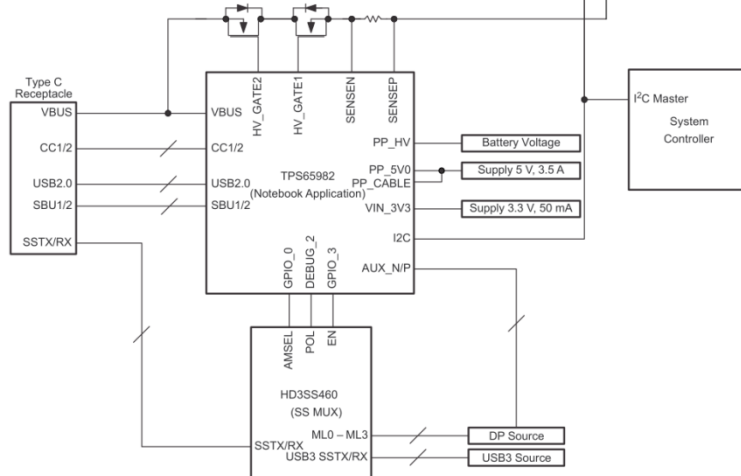


Figure 79. Dual-Port Notebook Application

【3】

Is Figure83 of the data sheet the thing which showed the following flow in the situation that keep connecting a USB connector in application?

Barrel Jack insert (to application)

Barrel Jack remove (from application)

Barrel Jack insert (to application)

