


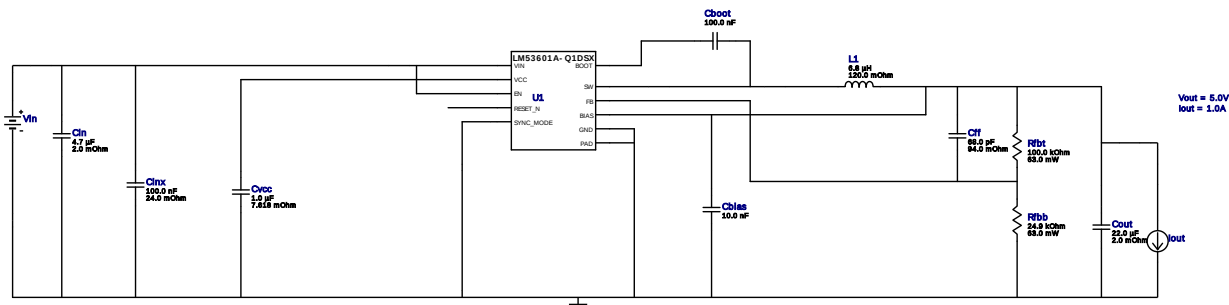

1. The input capacitor included in the BOM only contains a small filter capacitor that should be placed near the IC. Depending on where the power supply is laid out in the system additional bulk capacitance may need to be added to filter the line ripple.
2. If there is no VinTyp specified, WEBENCH will use the VinMax value. To change the VinTyp value, click on the "Change Design Inputs" button under the Optimization Tuning knob. In some applications, while the design requires the input voltage to be a wide range, for a majority of the time, it is operating at a much lower voltage than the maximum input voltage. Sizing the inductor based on the maximum input voltage may yield an inductance much larger than typically needed, causing a larger footprint for the overall design. At the same time, components such as the input capacitor must be rated based on the maximum input voltage. WEBENCH now supports the use of this additional input voltage specification.
3. This regulator device is qualified for Automotive applications. All passives and other components selected in this design may not be qualified for Automotive applications. The user is required to verify that all components in the design meet the qualification and safety requirements for their specific application. View WEBENCH(R) Disclaimer.





My Comments







No comments







Electrical BOM


#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cbias	MuRata	GRM033R61A103KA01D Series= X5R	Cap= 10.0 nF VDC= 10.0 V IRMS= 0.0 A	1	\$0.01	0201 2 mm ²
2.	Cboot	Taiyo Yuden	HMK212B7104KG-T Series= X7R	Cap= 100.0 nF VDC= 100.0 V IRMS= 0.0 A	1	\$0.03	0805 7 mm ²
3.	Cff	Kemet	C0805C680J5GACTU Series= COG/NPO	Cap= 68.0 pF ESR= 94.0 mOhm VDC= 50.0 V IRMS= 603.0 mA	1	\$0.01	0805 7 mm ²
4.	Cin	MuRata	GRM32ER71H475KA88L Series= X7R	Cap= 4.7 uF ESR= 2.0 mOhm VDC= 50.0 V IRMS= 5.35 A	1	\$0.19	1210 15 mm ²
5.	Cinx	AVX	08055C104JAT2A Series= X7R	Cap= 100.0 nF ESR= 24.0 mOhm VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
6.	Cout	MuRata	GRM32ER61C226ME20L Series= X5R	Cap= 22.0 uF ESR= 2.0 mOhm VDC= 16.0 V IRMS= 3.68 A	1	\$0.12	1210 15 mm ²
7.	Cvcc	TDK	C1005X5R0J105M Series= X5R	Cap= 1.0 uF ESR= 7.618 mOhm VDC= 6.3 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
8.	L1	Bourns	SDR0403-6R8ML	L= 6.8 μ H DCR= 120.0 mOhm	1	\$0.18	 SDR0403 28 mm ²
9.	Rfbb	Vishay-Dale	CRCW040224K9FKED Series= CRCW..e3	Res= 24.9 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
10.	Rfbt	Vishay-Dale	CRCW0402100KFKED Series= CRCW..e3	Res= 100.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
11.	U1	Texas Instruments	LM53601AQDSXRQ1	Switcher	1	\$1.72	 DSX0010A 16 mm ²

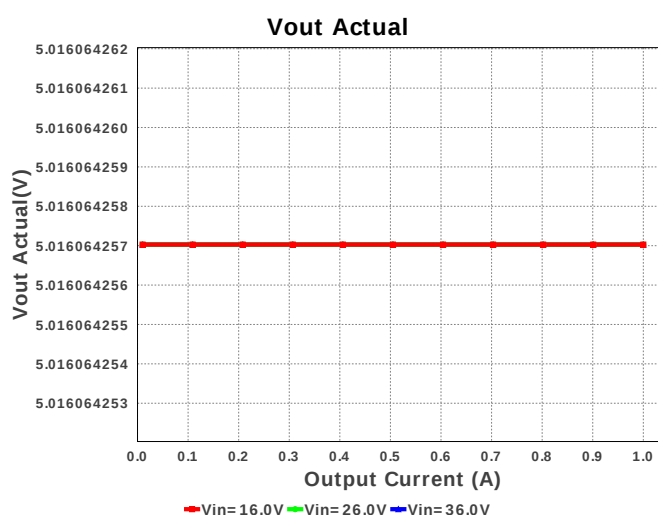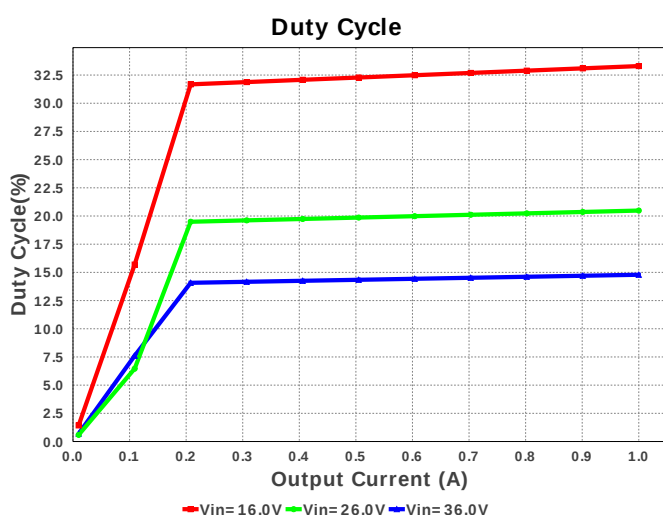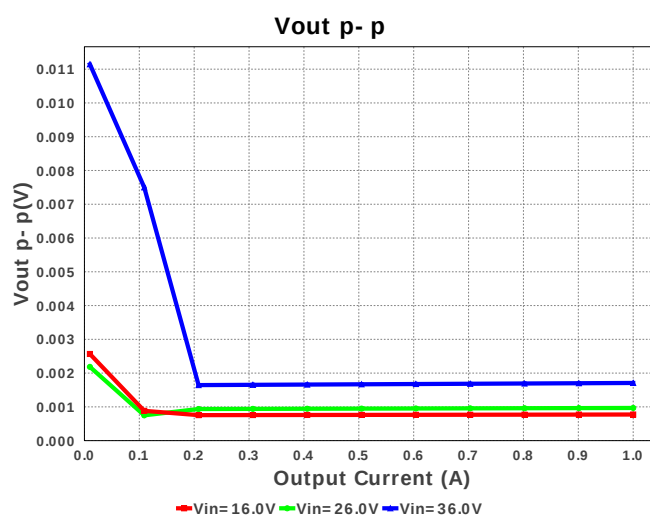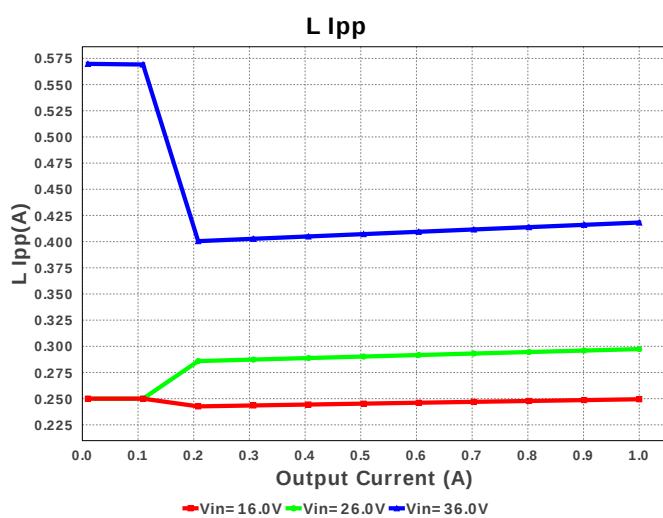

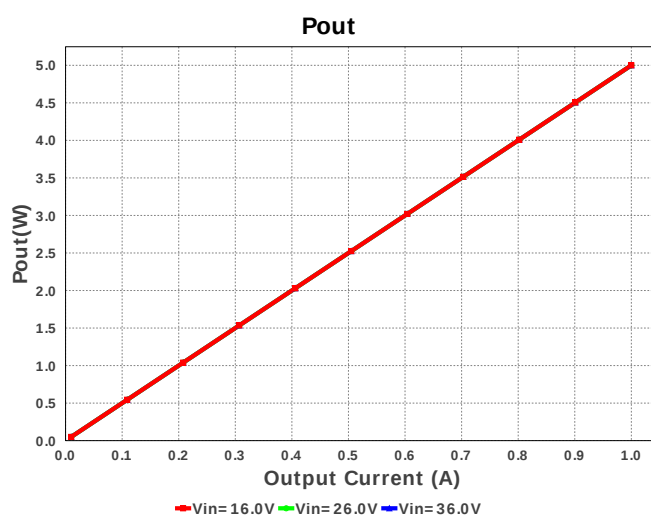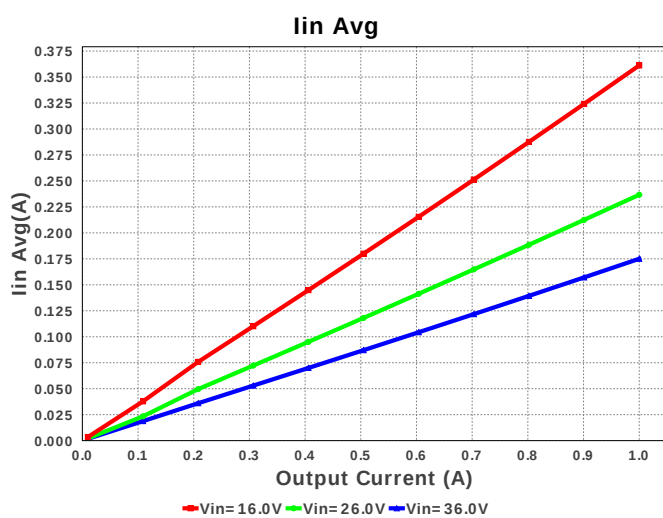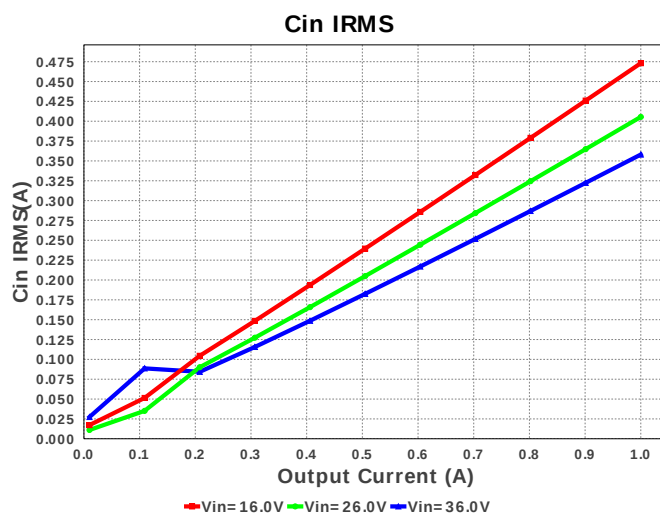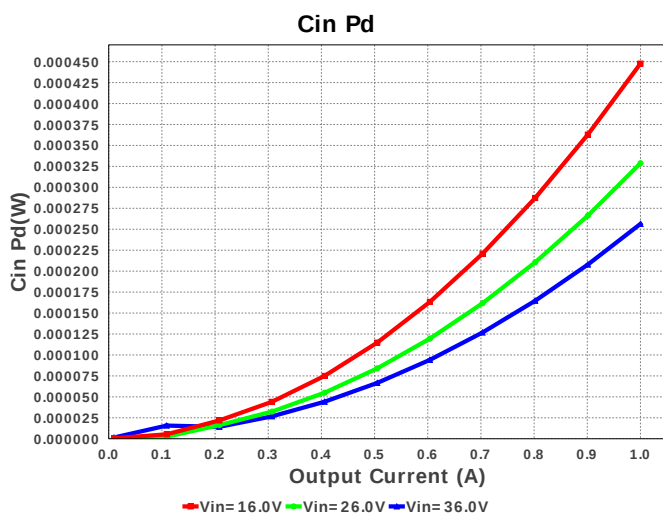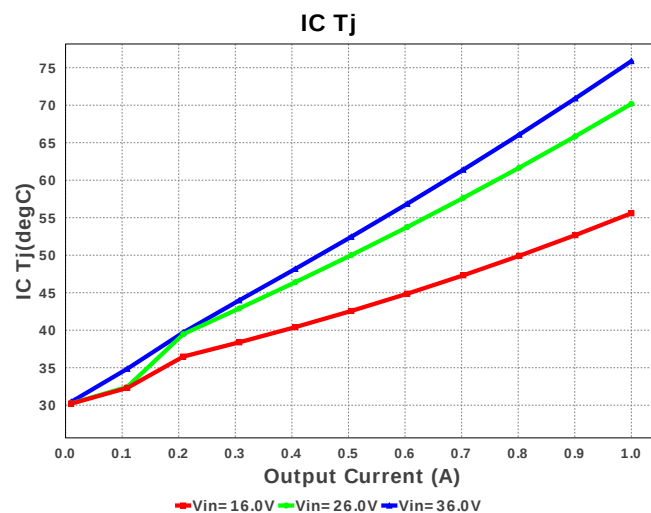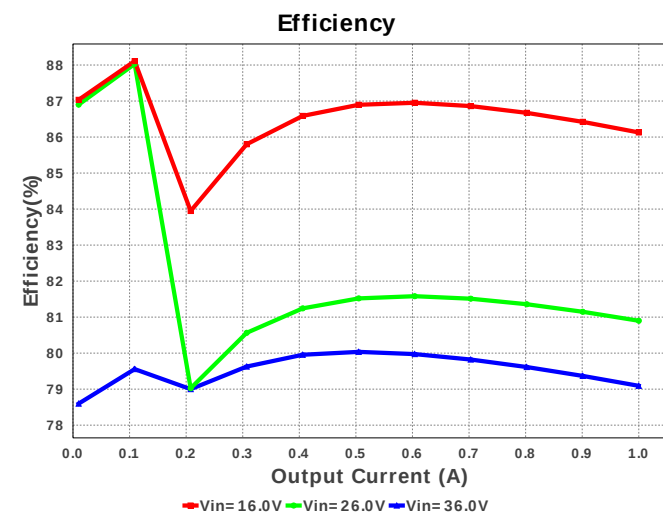

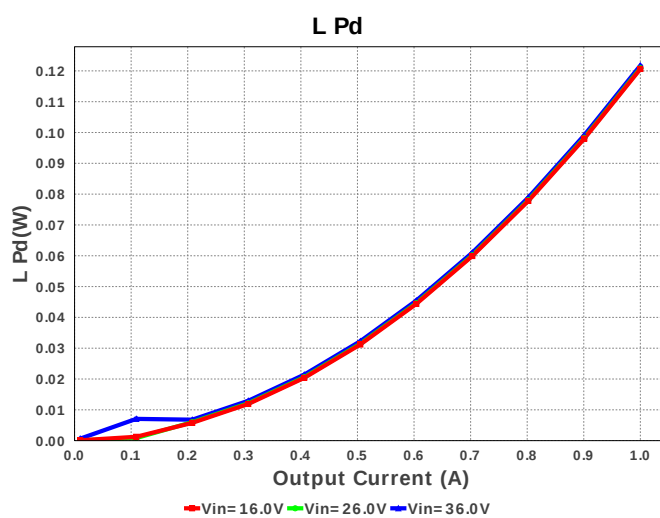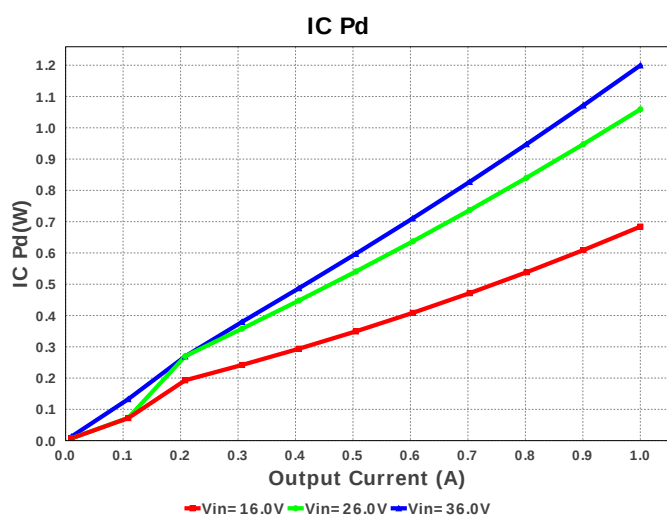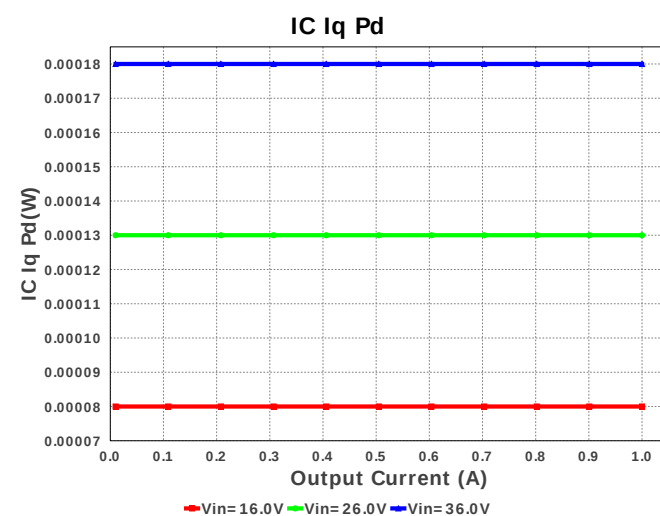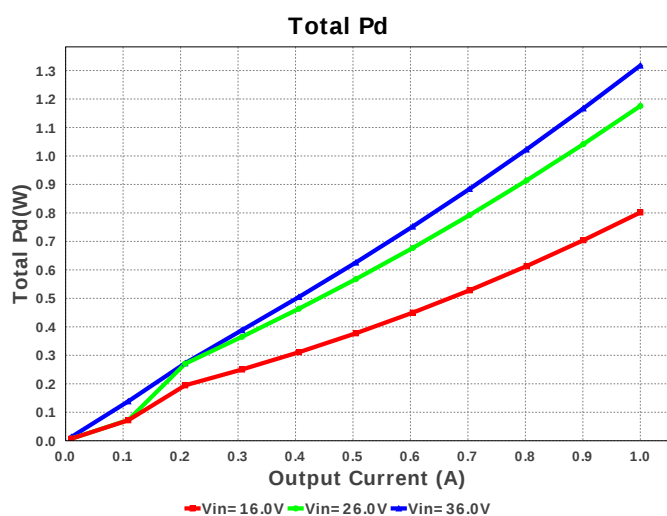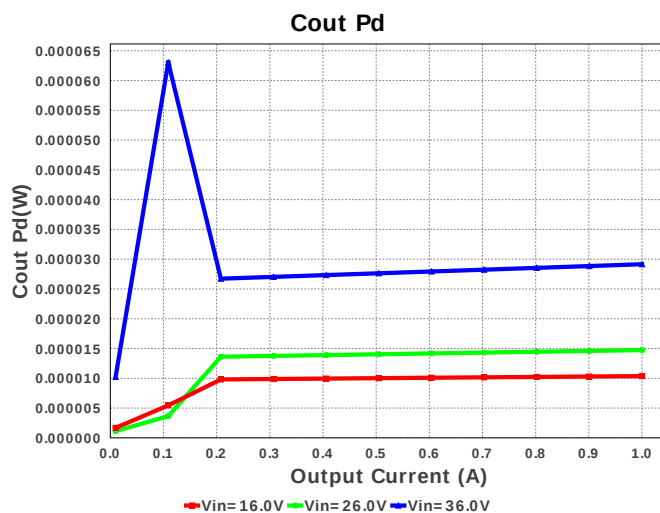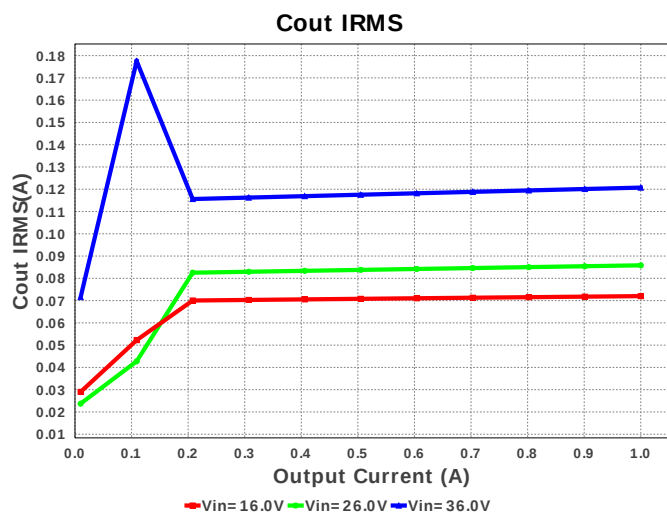

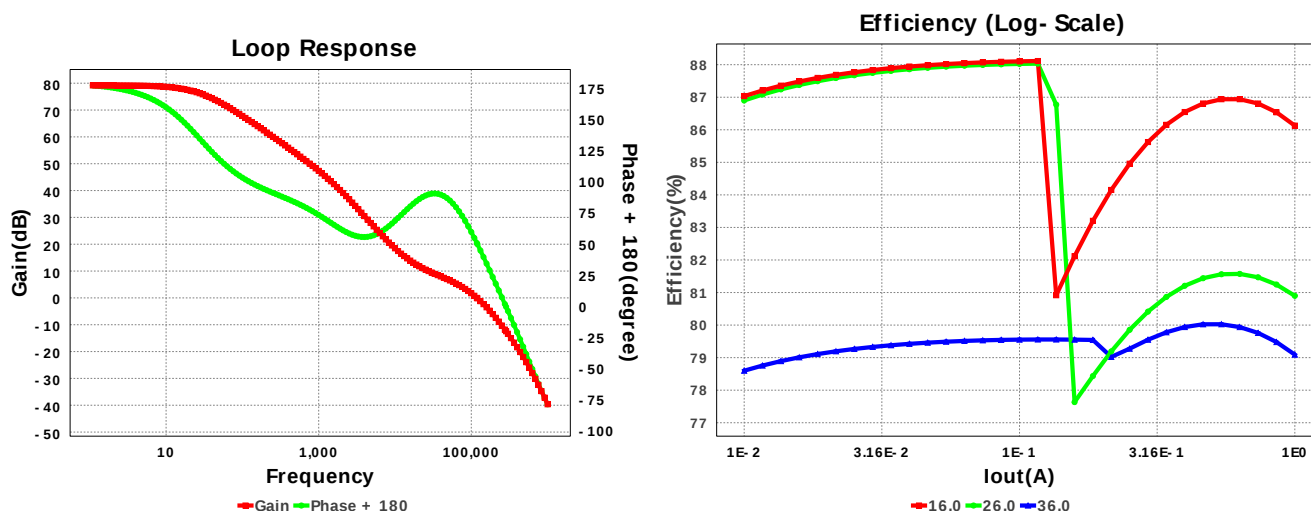

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	358.027 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	120.732 mA	Current	Output capacitor RMS ripple current
3.	Iin Avg	175.05 mA	Current	Average input current
4.	L Ipp	418.23 mA	Current	Peak-to-peak inductor ripple current
5.	BOM Count	11	General	Total Design BOM count
6.	FootPrint	104.0 mm ²	General	Total Foot Print Area of BOM components
7.	Frequency	1.6 MHz	General	Switching frequency
8.	Mode	CCM	General	Conduction Mode
9.	Pout	5.0 W	General	Total output power
10.	Total BOM	\$2.3	General	Total BOM Cost
11.	Low Freq Gain	79.169 dB	Op_Point	Gain at 10Hz
12.	Vout Actual	5.016 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
13.	Vout OP	5.0 V	Op_Point	Operational Output Voltage
14.	Cross Freq	118.322 kHz	Op_point	Bode plot crossover frequency
15.	Duty Cycle	14.79 %	Op_point	Duty cycle
16.	Efficiency	79.092 %	Op_point	Steady state efficiency
17.	Gain Marg	-12.435 dB	Op_point	Bode Plot Gain Margin
18.	IC Tj	75.878 degC	Op_point	IC junction temperature
19.	ICThetaJA	38.9 degC/W	Op_point	IC junction-to-ambient thermal resistance
20.	IOUT_OP	1.0 A	Op_point	Iout operating point
21.	Phase Marg	51.186 deg	Op_point	Bode Plot Phase Margin
22.	VIN_OP	36.0 V	Op_point	Vin operating point
23.	Vout p-p	1.708 mV	Op_point	Peak-to-peak output ripple voltage
24.	Cin Pd	256.366 μ W	Power	Input capacitor power dissipation
25.	Cout Pd	29.153 μ W	Power	Output capacitor power dissipation
26.	IC Iq Pd	180.0 μ W	Power	IC Iq Pd
27.	IC Pd	1.2 W	Power	IC power dissipation
28.	L Pd	121.749 mW	Power	Inductor power dissipation
29.	Total Pd	1.318 W	Power	Total Power Dissipation
30.	Vout Tolerance	2.634 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	1.0	Maximum Output Current
2.	VinMax	36.0	Maximum input voltage
3.	VinMin	16.0	Minimum input voltage
4.	Vout	5.0	Output Voltage
5.	base_pn	LM53601A-Q1	Texas Instruments Base Part Number
6.	source	DC	Input Source Type
7.	ta	30.0	Ambient temperature

Design Assistance

1. The LM53601A-Q1 is qualified for Automotive applications. All passives and other components selected in this design may not be qualified for Automotive applications. The user is required to verify that all components in the design meet the qualification and safety requirements for their specific application.

2. LM53601A-Q1 Product Folder : <http://www.ti.com/product/LM53601%2DQ1> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).