


WEBENCH® Electrical Simulation Report

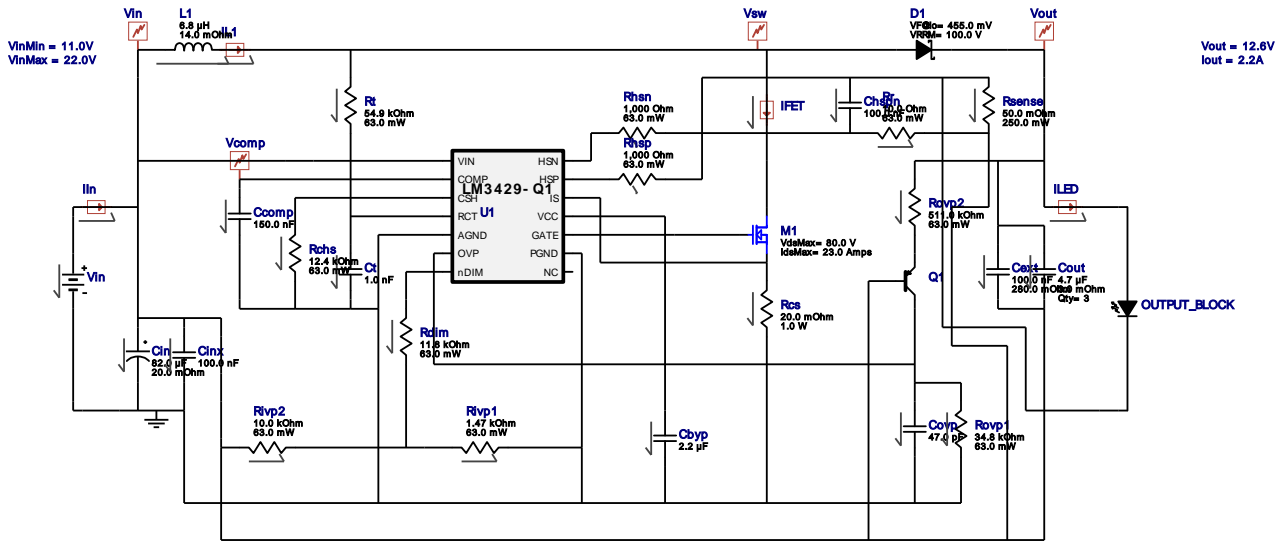

1. This regulator device is qualified for Automotive applications. All passives and other components selected in this design may not be qualified for Automotive applications. The user is required to verify that all components in the design meet the qualification and safety requirements for their specific application. View WEBENCH(R) Disclaimer.


My Comments

TO MODIFY FOR BOOST ONLY REMOVE Q1 CONNECT LED TO GROUND NOT RSENSE

Electrical BOM





#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cbyp	Taiyo Yuden	EMK212B7225KG-T Series= X7R	Cap= 2.2 μ F VDC= 16.0 V IRMS= 0.0 A	1	\$0.03	0805 7 mm ²
2.	Ccomp	MuRata	GRM155R60J154KE01D Series= X5R	Cap= 150.0 nF VDC= 6.3 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
3.	Cext	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
4.	Chspn	MuRata	GRM21BR71E104KA01L Series= X7R	Cap= 100.0 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
5.	Cin	Panasonic	35SVPF82M Series= SVPF	Cap= 82.0 μ F ESR= 20.0 mOhm VDC= 35.0 V IRMS= 4.0 A	1	\$0.61	 CAPSMT_62_E12 106 mm ²
6.	Cinx	Kemet	C0603C104K5RACTU Series= X7R	Cap= 100.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0603 5 mm ²
7.	Cout	MuRata	GRM31CR71H475KA12L Series= X7R	Cap= 4.7 μ F ESR= 3.0 mOhm VDC= 50.0 V IRMS= 4.98 A	3	\$0.07	1206 11 mm ²
8.	Covp	Kemet	C0805C470K5GACTU Series= C0G/NP0	Cap= 47.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
9.	Ct	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
10.	D1	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm ²
11.	D_LED	CUSTOM	CUSTOM	LED	1	NA	CUSTOM 0 mm ²
12.	L1	Bourns	SRP1270-6R8M	L= 6.8 µH DCR= 14.0 mOhm	1	\$0.60	 SRP1270 246 mm ²
13.	M1	Infineon Technologies	BSC340N08NS3 G	VdsMax= 80.0 V IdsMax= 23.0 Amps	1	\$0.19	 PG-TDSON-8 55 mm ²
14.	Q1	Diodes Inc.	MMBT3906-7-F	Bipolar Transistor	1	\$0.02	 SOT-23 14 mm ²
15.	Rchs	Vishay-Dale	CRCW040212K4FKED Series= CRCW..e3	Res= 12.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
16.	Rcs	Susumu Co Ltd	PRL1632-R020-F-T1 Series= PRL1632	Res= 20.0 mOhm Power= 1.0 W Tolerance= 1.0%	1	\$0.19	 0612 11 mm ²
17.	Rdim	Vishay-Dale	CRCW040211K8FKED Series= CRCW..e3	Res= 11.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
18.	Rhsn	Vishay-Dale	CRCW04021K00FKED Series= CRCW..e3	Res= 1,000 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
19.	Rhsp	Vishay-Dale	CRCW04021K00FKED Series= CRCW..e3	Res= 1,000 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
20.	Rivp1	Vishay-Dale	CRCW04021K47FKED Series= CRCW..e3	Res= 1.47 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
21.	Rivp2	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
22.	Rovp1	Vishay-Dale	CRCW040234K8FKED Series= CRCW..e3	Res= 34.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
23.	Rovp2	Vishay-Dale	CRCW0402511KFKED Series= CRCW..e3	Res= 511.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
24.	Rr	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
25.	Rsense	Bourns	CRM0805-FW-R050ELF Series= ?	Res= 50.0 mOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.10	 0805 7 mm ²
26.	Rt	Vishay-Dale	CRCW040254K9FKED Series= CRCW..e3	Res= 54.9 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
27.	U1	Texas Instruments	LM3429Q1MH/NOPB	Switcher	1	\$1.35	 MXA14A 59 mm ²

Simulation Parameters

#	Name	Parameter Name	Description	Values
1.	Ccomp	IC	Initial Voltage	0.9009050333535477 V
2.	Covp	IC	no description	0 V
3.	L1	IC	Initial Current	0 A

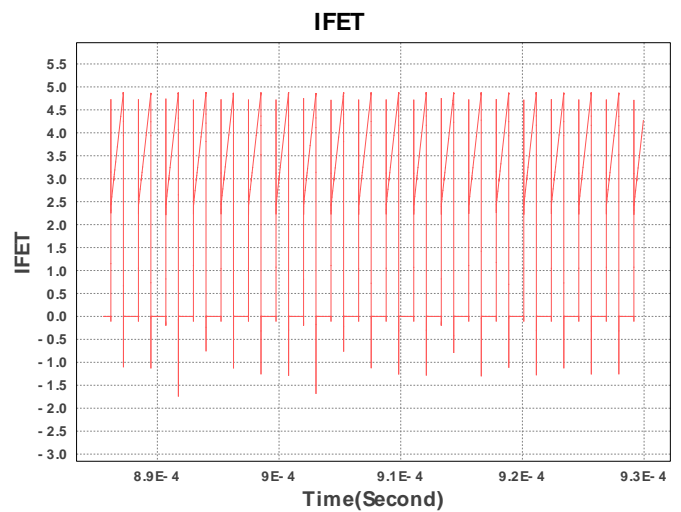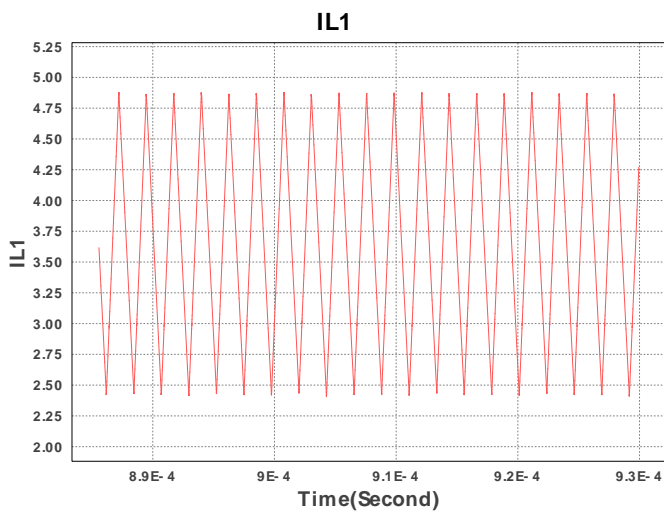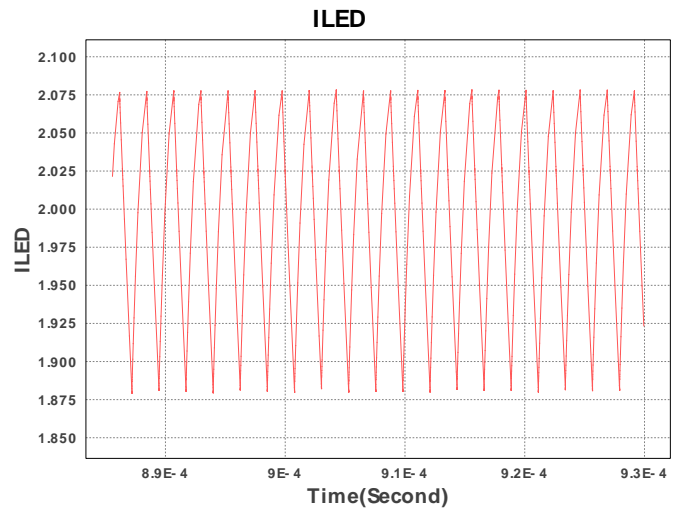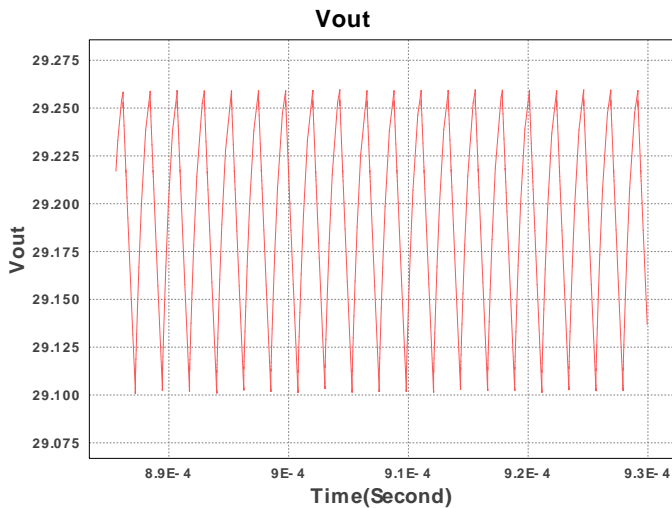

Design Inputs

#	Name	Value	Description
1.	Iout	2.2 A	Maximum Output Current
2.	VinMax	22.0 V	Maximum input voltage
3.	VinMin	11.0 V	Minimum input voltage
4.	Vout	12.6 V	Output Voltage
5.	application	LED_DRIVER	LED Application
6.	base_pn	LM3429-Q1	Base Product Number
7.	LED_Architect	N	LED Architect Project
8.	ledparallel	1.0	Number of LED in parallel
9.	ledpartnumber	Custom	LED Part number
10.	ledseries	1.0	Number of LED in series
11.	line_fsw	60.0	AC Line Frequency
12.	source	DC	Input Source Type
13.	Ta	30.0 degC	Ambient temperature
14.	UserFsw	450.82 kHz	Customer Selected Frequency

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	563.988 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	2.2 A	Current	Output capacitor RMS ripple current
3.	Iin Avg	2.488 A	Current	Average input current
4.	L Ipp	1.954 A	Current	Peak-to-peak inductor ripple current
5.	L1 Irms	4.398 A	Current	Inductor ripple current
6.	LED Iavg	1.992 A	Current	LED Average Current
7.	LED Ipp	75.248 mA	Current	LED Ripple Current
8.	M1 Irms	4.237 A	Current	M1 MOSFET Irms
9.	SW Ipk	5.339 A	Current	Peak switch current
10.	BOM Count	29	General	Total Design BOM count
11.	FootPrint	812.0 mm ²	General	Total Foot Print Area of BOM components
12.	Frequency	450.82 kHz	General	Switching frequency
13.	IC Tolerance	25.0 mV	General	IC Feedback Tolerance
14.	M Rdsn	6.8 mOhm	General	Drain-Source On-resistance
15.	M Vds Act	28.814 mV	General	M Vds
16.	M1 ThetaJA	50.0 degC/W	General	MOSFET junction-to-ambient thermal resistance
17.	Mode	CCM	General	Conduction Mode
18.	Pout	25.098 W	General	Total output power
19.	Total BOM	\$0.0	General	Total BOM Cost
20.	D1 Tj	66.253 degC	Op_Point	D1 junction temperature
21.	Vout OP	12.6 V	Op_Point	Operational Output Voltage
22.	Duty Cycle	55.529 %	Op_point	Duty cycle
23.	Efficiency	91.697 %	Op_point	Steady state efficiency
24.	IC Tj	37.137 degC	Op_point	IC junction temperature
25.	ICThetaJA	37.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
26.	IOUT_OP	1.992 A	Op_point	Iout operating point
27.	LED Rd	650.0 mOhm	Op_point	LED DynamicResistance
28.	LED Vf	12.6 V	Op_point	Total LED Forward Calculated Voltage
29.	M1 TjOP	41.15 degC	Op_point	M1 MOSFET junction temperature
30.	VIN_OP	11.0 V	Op_point	Vin operating point
31.	Cin Pd	6.362 mW	Power	Input capacitor power dissipation
32.	Cout Pd	4.84 mW	Power	Output capacitor power dissipation
33.	Diode Pd	906.326 mW	Power	Diode power dissipation
34.	IC Pd	192.885 mW	Power	IC power dissipation
35.	L Pd	325.026 mW	Power	Inductor power dissipation
36.	LED Pd	25.098 W	Power	LED Power Dissipation
37.	M1 Pd	223.008 mW	Power	M1 MOSFET total power dissipation
38.	M1 PdCond	129.986 mW	Power	M1 MOSFET conduction losses
39.	M1 PdSw	93.022 mW	Power	M1 MOSFET switching losses
40.	Total Pd	2.273 W	Power	Total Power Dissipation
41.	Total LED load Rd	650.0 mOhm	Unknown	Total LED Load DynamicResistance
42.	Vout Tolerance	198.413 m%	Unknown	Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Assistance

1. Feature Highlights: Automotive Qualified LED Driver. Please consult product datasheet for detailed specifications.
2. The LM3429-Q1 is qualified for Automotive applications. All passives and other components selected in this design may not be qualified for Automotive applications. The user is required to verify that all components in the design meet the qualification and safety requirements for their specific application
3. **LM3429-Q1** Product Folder : <http://www.ti.com/product/LM3429%2DQ1> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).