

Multicell Li-Ion and Li-Polymer Battery Gas-Gauge Host Side Application Using bq2750x

*Ming Yu, Michael Vega, and Bill Jackson**Battery Management*

ABSTRACT

The bq2750x family of gas gauges is designed to operate from a single-cell, lithium-ion or lithium-polymer battery. The applications that benefit from these gas gauges use two or more lithium cells in series where the battery voltage exceeds the single cell gas gauge bq2750x family battery voltage measurement capability, which normally is equal to or less than 5 V. This application report describes a low-component-count solution for using the bq27500, bq27501 and bq27505 with a multi-cell battery.

Contents

1	Introduction	1
2	The Implementation	2
3	Voltage Calibration and Accuracy	3
4	bq2750x Configuration and Learning Process	3
5	Cell Balancing Consideration	3

List of Figures

1	External Voltage Divider Using Operational Amplifier.....	2
---	---	---

List of Tables

1	Voltage Divider Accuracy After Calibration	3
---	--	---

1 Introduction

Host-side application of a single-cell gas gauge, bq2750x, requires direct battery voltage measurement from the battery pack. For a single-cell pack, the bq2750x uses the BAT pin to measure the pack voltage directly with the BAT pin internal translation circuits enabled. The maximum voltage that can be applied to the BAT pin is 5 V.

If a multicell battery pack is used, the bq2750x cannot directly measure the battery voltage because the pack voltage may be much higher than the maximum operating voltage on the BAT pin. An external resistive voltage divider circuit is required to divide down the battery voltage to the range equivalent to a single-cell battery.

2 The Implementation

When the bq2750x BAT pin is enabled for direct voltage measurement, the internal translation circuit is turned on. This internal translation circuit has a built in 5:1 ratio resistive voltage divider. The total resistance of the internal voltage divider is approximately 100 k Ω . The actual ratio is calibrated at the device final test and stored in the device so that the direct voltage-measurement on the bq2750x BAT pin can achieve 1-mV accuracy. This voltage measurement accuracy is required by the Impedance Track™ algorithm to have less than 1% state-of-charge error.

When an external resistive voltage divider is directly connected to the BAT pin, the external voltage divider network interferes with the internal voltage divider network and causes the voltage divider ratio to change so that the voltage measurement is not accurate. To prevent the interference, a unity-gain operational amplifier is used to buffer the output of the resistive voltage divider and provide a BAT voltage that is equal to the external voltage divider output. The micro-power operational amplifier generally has much higher input impedance than the 100-k Ω internal voltage divider and reduces the voltage measurement error due to loading of the external voltage divider output.

The tolerance of the external voltage divider resistors has a direct impact on the voltage measurement error. A resistor with 0.1% tolerance is required. Considering the temperature range of the application, a temperature coefficient of 50 ppm/C or less is also needed. The resistors must be of the same kind and from the same manufacturer.

The capacitor at the output of the operational amplifier and the resistor of the BAT pin internal voltage divider form an RC decoupling circuit. This allows use of appropriate bypass capacitors at the BAT input, yet does not cause instability of the unity-gain amplifier due to capacitive load.

The bq2750x series gas gauge has typical current consumption of 100 μ A under normal operation. The peak current can go up to 1 mA for a short period of time. The operational amplifier cannot provide enough current for bq2750x to work properly. A separate LDO is required to provide the power to VCC of the gauge. The required LDO can be powered up from the same battery voltage as the one-cell application does. The maximum input allowed for the LDO must be above 8.4 V for the two-cell application.

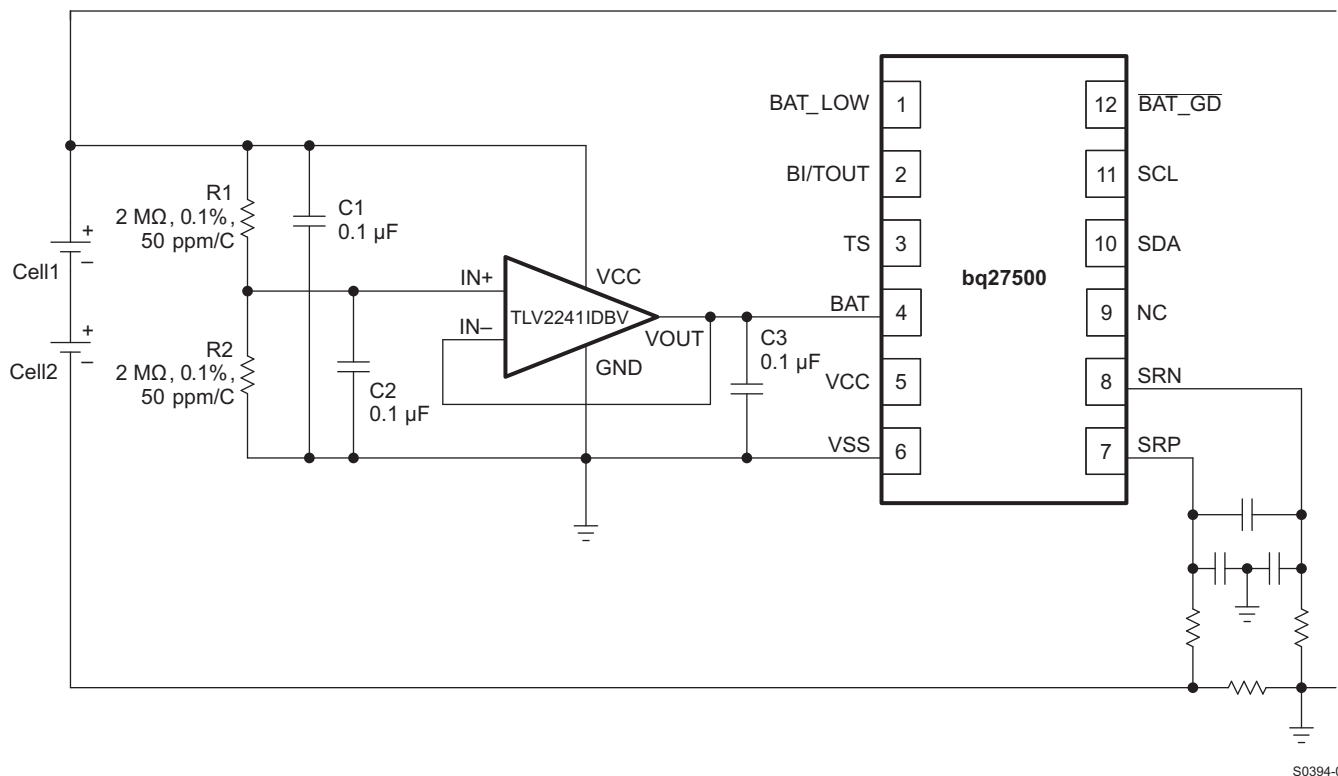


Figure 1. External Voltage Divider Using Operational Amplifier

3 Voltage Calibration and Accuracy

The internal voltage divider inside bq2750x has been calibrated at the factory to have 1-mV accuracy. The external voltage divider requires additional calibration.

For calibration, a calibrated voltage meter with resolution better than 1 mV is used. Apply a constant 8 V to the positive input of the voltage divider and read the voltage measured by the bq2750x gauge. The expected voltage should be 4 V. The difference is the offset error, and it can be stored in data flash inside the gauge.

To further investigate the impact of temperature and input voltage on the voltage divider offset and gain, a bq27500 evaluation module is built with this voltage divider circuit and tested with voltage input from 8.4 V down to 6 V with 200-mV increments at -10°C , 25°C and 50°C . The voltage measurement error across the temperature and voltage range after calibration is shown in [Table 1](#). The maximum voltage error due to the voltage divider is in the 1- to 2-mV range after calibration.

Table 1. Voltage Divider Accuracy After Calibration

-10°C				25°C				50°C			
Pack Voltage	Divided Voltage	Abs. Error	After Cal. Error	Pack Voltage	Divided Voltage	Abs. Error	After Cal. Error	Pack Voltage	Divided Voltage	Abs. Error	After Cal. Error
8.401	4.193	0.015	-0.001	8.401	4.192	0.017	0.001	8.401	4.192	0.017	0.001
8.201	4.093	0.015	-0.001	8.201	4.092	0.017	0.001	8.201	4.092	0.017	0.001
8.000	3.992	0.016	0.000	8.000	3.992	0.016	0.000	8.000	3.992	0.016	0.000
7.800	3.893	0.014	-0.002	7.800	3.892	0.016	0.000	7.800	3.892	0.016	0.000
7.600	3.792	0.016	0.000	7.600	3.792	0.016	0.000	7.600	3.792	0.016	0.000
7.400	3.693	0.014	-0.002	7.400	3.692	0.016	0.000	7.400	3.692	0.016	0.000
7.200	3.592	0.016	0.000	7.200	3.592	0.016	0.000	7.200	3.592	0.016	0.000
7.000	3.492	0.016	0.000	7.000	3.492	0.016	0.000	7.000	3.492	0.016	0.000
6.800	3.392	0.016	0.000	6.800	3.392	0.016	0.000	6.800	3.392	0.016	0.000
6.600	3.292	0.016	0.000	6.600	3.292	0.016	0.000	6.600	3.292	0.016	0.000
6.400	3.192	0.016	0.000	6.400	3.192	0.016	0.000	6.400	3.192	0.016	0.000
6.200	3.093	0.014	-0.002	6.200	3.093	0.014	-0.002	6.200	3.092	0.016	0.000
6.000	2.993	0.014	-0.002	6.000	2.993	0.014	-0.002	6.000	2.992	0.016	0.000

Unit: volts

4 bq2750x Configuration and Learning Process

The gas gauge configuration and learning process is identical to that of a single-cell application. Equivalently, the bq2750x is operating from a single cell. Gauge current sensing is not affected by multiple cells in series. The cell internal impedance calculation is still valid. The total capacity of the cells in series is the same as that of a single-cell capacity. If a 1-mV accuracy voltage measurement is maintained, the overall accuracy of the gauge for multiple cells is the same as for a single cell. The data flash configuration and the learned data flash image from a single cell can be used for the same cell in a multicell configuration.

5 Cell Balancing Consideration

None of the bq2750x devices have cell-balancing capability, and the use of a voltage divider does not provide any individual cell information. It is up to the pack maker and the original equipment manufacturer to make sure that the cells in series are not out of balance and that the safety of the pack is maintained.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video
Wireless	www.ti.com/wireless-apps

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated