

WEBENCH[®] Transformer Report

Design : 23 UCC28634DR
UCC28634DR 150V-265V to 5.00V @ 6A

#	Name	Value
1.	Core Part Number	150-2624
2.	Core Manufacturer	Würth Elektronik
3.	Coil Former Part Number	070-5680
4.	Coil Former Manufacturer	Würth Elektronik

Transformer Electrical Diagram

Primary


Turns	50.0
AWG	28.0
Layers	2.0
Strands	1.0
Insulation Type	Heavy Insulated Magnet Wire

Auxiliary


Turns	8.0
AWG	28.0
Layers	1.0
Strands	3.0
Insulation Type	Heavy Insulated Magnet Wire

Secondary

Turns	3.0
AWG	25.0
Layers	1.0
Strands	4.0
Insulation Type	Triple Insulated

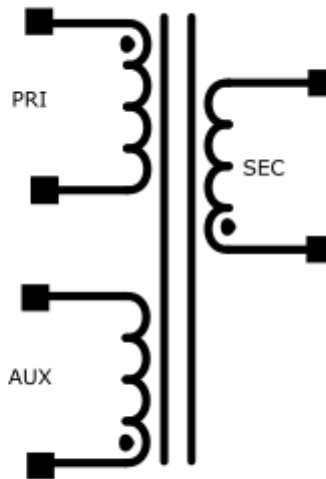

Transformer Construction Diagram

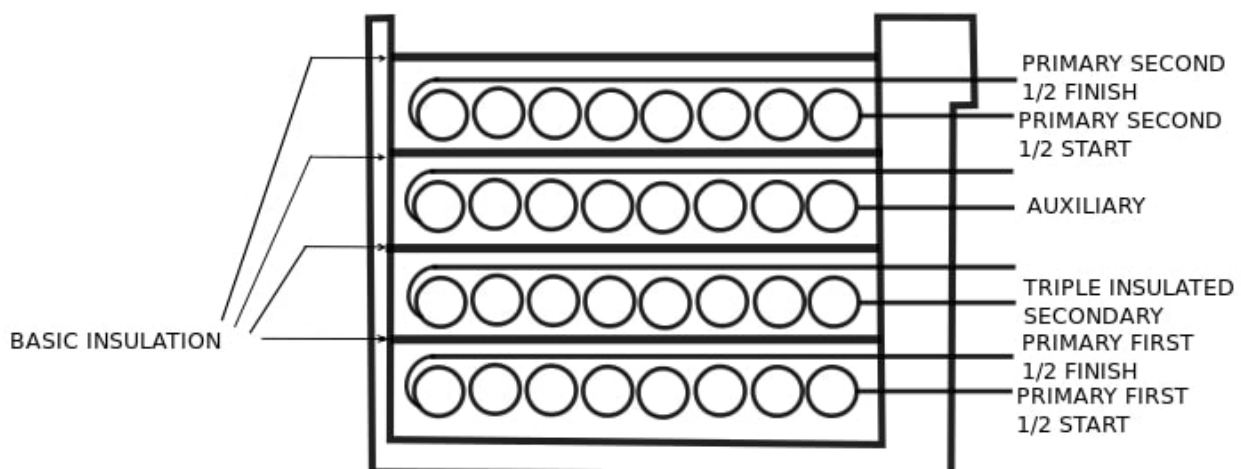

Winding Instruction

Winding	AWG	Turns	Winding Orientation
Primary First 1/2.0	28.0	25	Clockwise
Triple Insulated Secondary	25.0	3.0	Counter Clockwise
Auxiliary	28.0	8.0	Counter Clockwise
Primary Second 1/2.0	28.0	25	Clockwise

Transformer Parameters

#	Name	Value
1.	Lpri	9.33E-4H
2.	Inductance Factor(AI)	374.0nH
3.	Npri	50.0
4.	Nsec	3.0
5.	Naux	8.0
6.	Core Type	RM10
7.	Core Material	TP4A
8.	Bmax	0.24T
9.	Switching Frequency	60.00kHz
10.	DMax	0.43
11.	Ipk(Primary)	1.14A
12.	Irms(Primary)	0.43A
13.	Ipk(Secondary)	19.0A
14.	Irms(Secondary)	8.31A

Design Assistance

1. Application Hints High Power Operation The UCC28630 allows a peak power delivery up to 200% the nominal rating with only a modest increase in peak current. The combination of up to 2x frequency increase and 1.25x peak current increase in CCM allows up to 2x peak power delivery capability for a given transformer size. Rbld Rbld is used to set a minimum load for the circuit, so that in standby the output voltage does not float up. The value chosen by WEBENCH should be a good starting point but may need to be adjusted to achieve minimum power dissipation at standby as well. Active X-Cap Discharge The X-capacitor discharge function discharges the X-capacitor to the SELV 60V level in 1 sec. When adjusting the components for the design, ensure that the bulk capacitance value is not too large for the power level desired, which ensures that the bulk capacitor discharge rate is fast enough to discharge the X-capacitor to meet the 1-second discharge target. The VSENSE terminal In order to protect the VSENSE terminal from excessive negative current, an additional series limiting resistor and clamping diode can be added on the VSENSE terminal. The DRV pull up diode can be combined with the clamping diode in a single package common-cathode diode to reduce the component count of the circuit (see Figure 24 in the datasheet for illustration). Magnetic Sense Resistor Network When adjusting components for the design, check that the equivalent Thevenin resistance (Rth) of the R1/R2 falls within the required range of 10kOhm and 20kOhm. If the Rth is outside of this range, it triggers the VSENSE terminal open or short terminal check at start-up. Peak Current Mode Control and the CS Terminal Depending on the PCB layout, an additional RC filter may be required on the CS terminal, as show in Figure 30 of the datasheet. The capacitor, Ccs, should be positioned as close as possible to terminals 3 and 4 and tracked directly to the terminals. Rcs2 should also be located close to terminal 3 to minimize noise, and should not exceed 20kOhms since larger values could be detected as a possible open circuit on the CS terminal during the start-up terminal checks. The time constant for this RC filter should no be excessive so that the filter does not reduce the measured peak current. Typical time values would fall between 100ns and 200ns. Primary-Side Overload Timer An internal overload timer tracks the power stage thermal stress and protects the power stage against output overload. The overload timer trip level and time constant are both selectable from a defined list of combinations (See Table 1 in datasheet for combinations), and is set using a pull-down resistance, Rprog, on the DRV terminal. The values of the Rprog resistor that corresponds to specific trip levels and time constants can also be seen in Table 1 in the datasheet. Please see the datasheet for further design guidance and recommendations. <http://www.ti.com/lit/ds/symlink/ucc28630.pdf>

2. **UCC28634** Product Folder : <http://www.ti.com/product/UCC28634> : contains the data sheet and other resources.

Important Notice and Disclaimer

TI provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources AS IS and with all faults, and disclaims all warranties. These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

Providing these resources does not expand or otherwise alter TI's applicable Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with TI products.