


WEBENCH® Design Report

Design : 7 LM5021NA-1/NOPB
LM5021NA-1/NOPB 85V-264V to 12.00V @ 0.5A

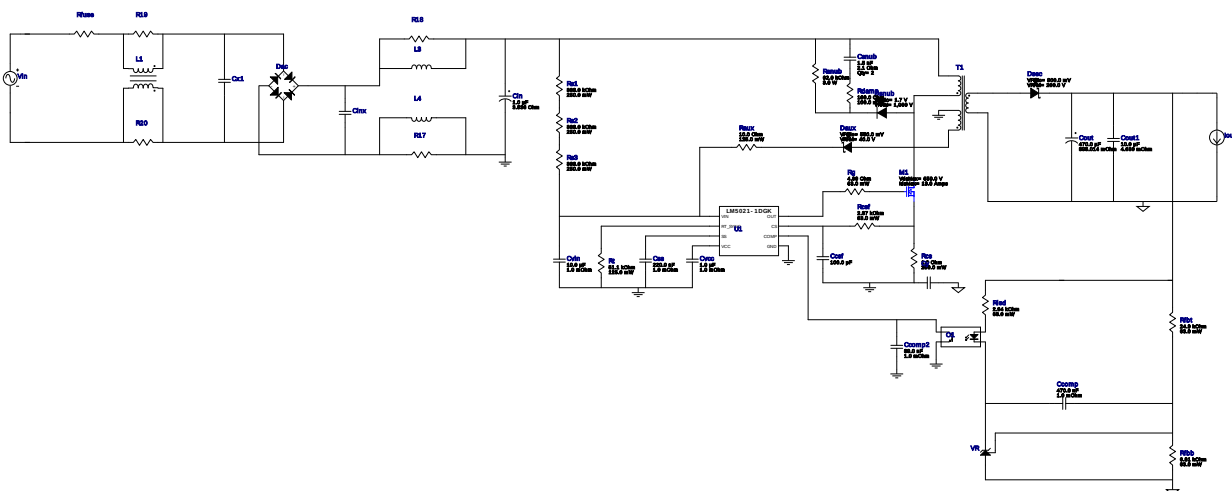


2. Click on the transformer symbol and select 'Design Transformer' to design using specific transformer cores and bobbin


Design Alerts

Component Selection Information





Click on the transformer symbol in the schematic and select "Explore Transformer Core/Bobbin Selection" to design using specific transformer cores and bobbin.

Electrical BOM


Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
Ccomp	MuRata	GRM155R61A474KE15D Series= X5R	Cap= 470.0 nF ESR= 1.0 mOhm VDC= 10.0 V IRMS= 0.0 A	1	\$0.02	0402 3 mm ²
Ccomp2	MuRata	GRM155R71A393KA01D Series= X7R	Cap= 39.0 nF ESR= 1.0 mOhm VDC= 10.0 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
Ccsf	Samsung Electro-Mechanics	CL21C101JBANNNC Series= C0G/NP0	Cap= 100.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
Cin	CUSTOM	CUSTOM Series= ?	Cap= 1.0 uF ESR= 3.8358 Ohm VDC= 316.8 V IRMS= 151.261 mA	1	NA	CUSTOM 0 mm ²
Cout	Chemi-Con	EKZE250ELL471MJ16S Series= KZE	Cap= 470.0 uF ESR= 395.01 mOhm VDC= 25.0 V IRMS= 1.43 A	1	\$0.18	 Chemi-Con_1000x1600 144 mm ²
Cout1	TDK	C1608X5R1E106M080AC Series= X5R	Cap= 10.0 uF ESR= 4.639 mOhm VDC= 25.0 V IRMS= 2.4141 A	1	\$0.21	0603 5 mm ²
Csnub	MuRata	GRM188R72E152KW07D Series= X7R	Cap= 1.5 nF ESR= 2.1 Ohm VDC= 250.0 V IRMS= 100.0 mA	2	\$0.31	0603 5 mm ²

Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
Css	Kemet	C0603C224Z4VACTU Series= Y5V	Cap= 220.0 nF ESR= 1.0 mOhm VDC= 16.0 V IRMS= 0.0 A	1	\$0.01	 0603 5 mm²
Cvcc	Taiyo Yuden	EMK107B7105KA-T Series= X7R	Cap= 1.0 uF ESR= 1.0 mOhm VDC= 16.0 V IRMS= 0.0 A	1	\$0.02	 0603 5 mm²
Cvin	MuRata	GRT31CR61H106KE01L Series= X5R	Cap= 10.0 uF ESR= 1.0 mOhm VDC= 50.0 V IRMS= 0.0 A	1	\$0.23	 1206_180 11 mm²
Daux	Fairchild Semiconductor	SS14FL	VF@Io= 550.0 mV VRRM= 40.0 V	1	\$0.06	 SOD-123F 12 mm²
Dsec	Fairchild Semiconductor	S320	VF@Io= 900.0 mV VRRM= 200.0 V	1	\$0.25	 SMB 44 mm²
Dsnub	SMC Diode Solutions	UF4007TA	VF@Io= 1.7 V VRRM= 1,000.0 V	1	\$0.04	 DO-41 43 mm²
M1	Infineon Technologies	IPP65R190C7	VdsMax= 650.0 V IdsMax= 13.0 Amps	1	\$1.57	 TO-220AB 79 mm²
O1	Fairchild Semiconductor	FOD817A	Optocoupler	1	\$0.13	 DIP-4 71 mm²
Raux	Vishay-Dale	CRCW080510R0FKEA Series= CRCW..e3	Res= 10.0 Ohm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm²
Rcs	Vishay-Dale	CRCW12061R00FKEA Series= CRCW..e3	Res= 1.0 Ohm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm²
Rcsf	Vishay-Dale	CRCW04022K37FKED Series= CRCW..e3	Res= 2.37 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
Rdamp	Yageo	RC0603FR-07160RL Series= ?	Res= 160.0 Ohm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm²
Rfbb	Vishay-Dale	CRCW04026K81FKED Series= CRCW..e3	Res= 6.81 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
Rfbt	Vishay-Dale	CRCW040224K9FKED Series= CRCW..e3	Res= 24.9 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
Rg	Vishay-Dale	CRCW04024R99FKED Series= CRCW..e3	Res= 4.99 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
Rled	Vishay-Dale	CRCW04022K94FKED Series= CRCW..e3	Res= 2.94 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
Rs1	Yageo	RC1206FR-07383KL Series= ?	Res= 383.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm²
Rs2	Yageo	RC1206FR-07383KL Series= ?	Res= 383.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm²
Rs3	Yageo	RC1206FR-07383KL Series= ?	Res= 383.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm²


Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
Rsub	Vishay-Bccomponents	PR03000206202JAC00 Series= ?	Res= 62.0 kOhm Power= 3.0 W Tolerance= 5.0%	1	\$0.17	 PR03 197 mm²
Rt	Panasonic	ERJ-6ENF5112V Series= ERJ-6E	Res= 51.1 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm²
T1	Core=TDK , CoilFormer=TDK	Core=B65805P0000R049 , CoilFormer=B65822F1008T001	Lp= 674.0 µH Turns Ratio(Nas)= 12:9 Turns Ratio(Nps)= 58:9 Npri= 58.0 Naux= 12.0 Nsec= 9.0	1	\$0.76	 TDK_B65803 146 mm²
U1	Texas Instruments	LM5021NA-1/NOPB	Switcher	1	\$0.65	 DGK0008A 24 mm²
VR	Texas Instruments	TL431AIDBZR	Voltage References	1	\$0.08	 DBZ0003A 14 mm²

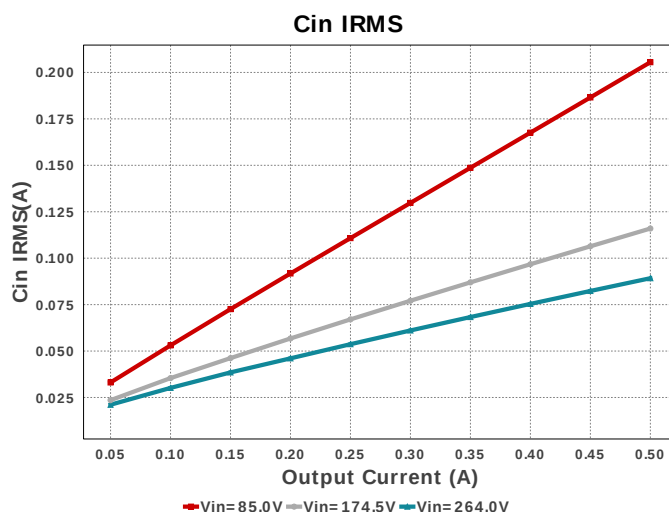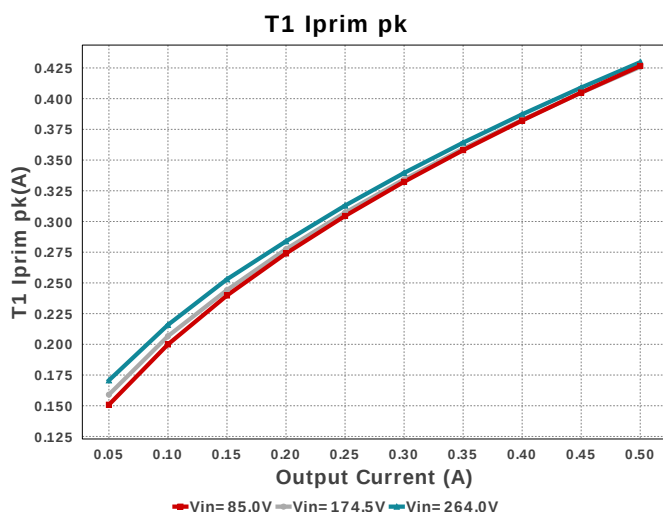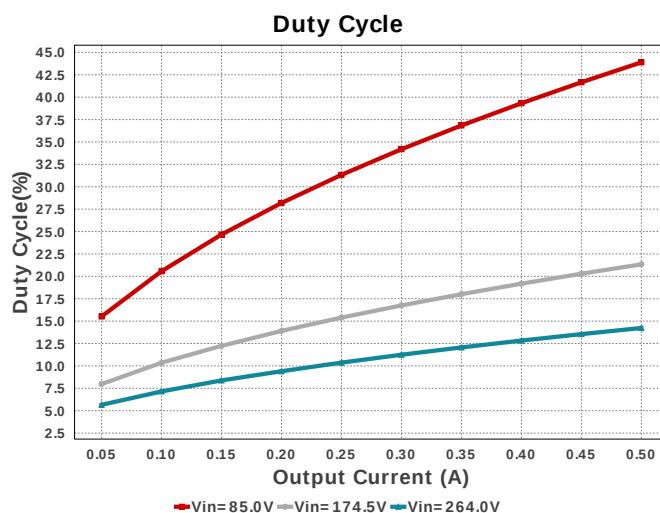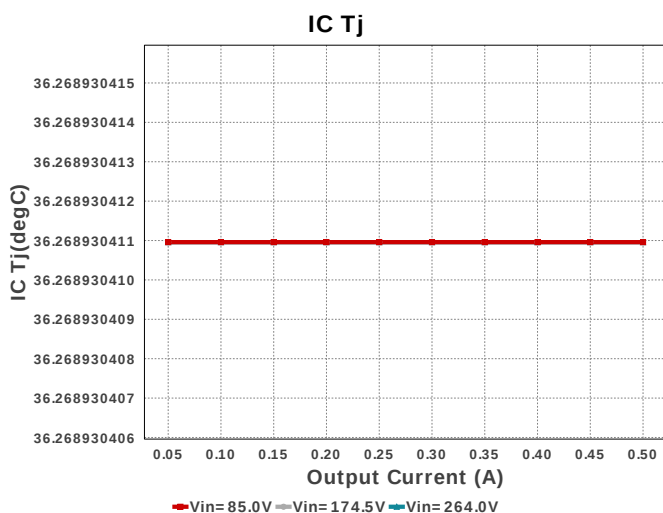


T1 Is1 RMS

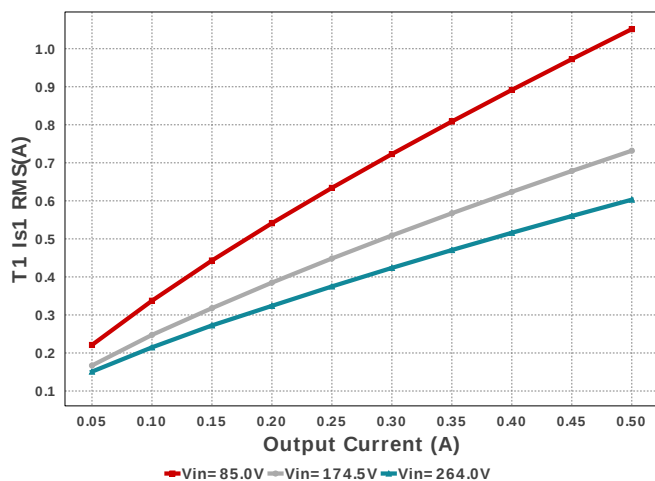


Isec Ripple

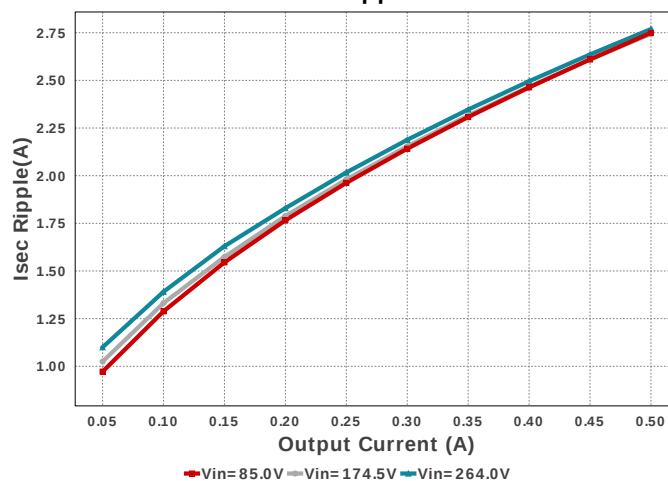


Efficiency

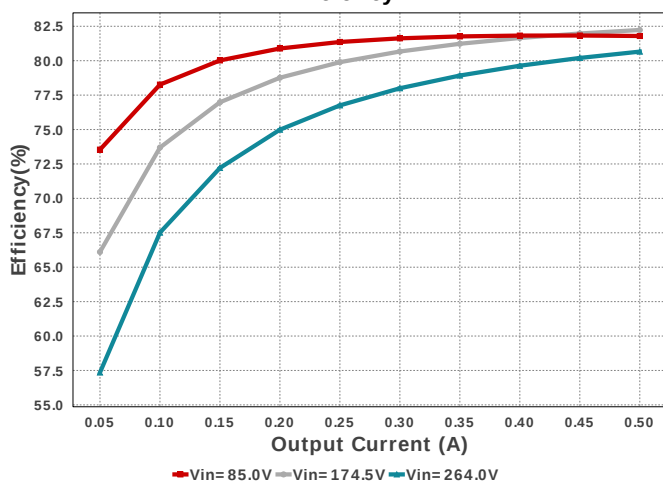


M1 TjOP






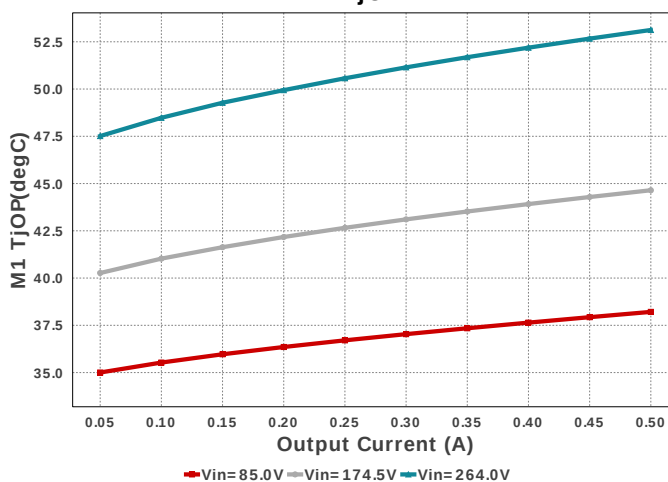








Vout p- p



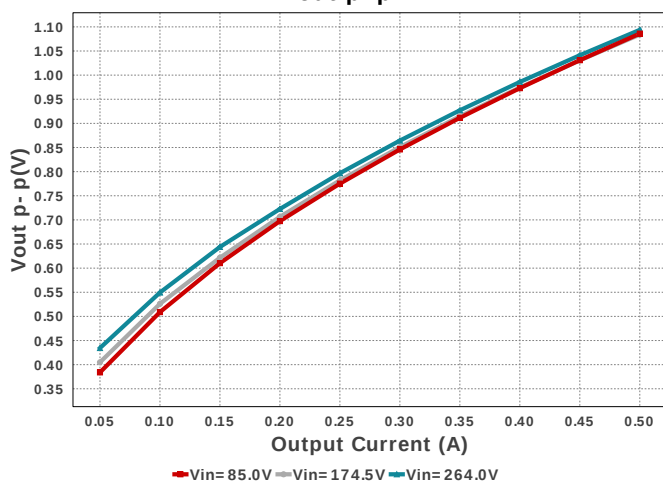


T1 Iprim RMS

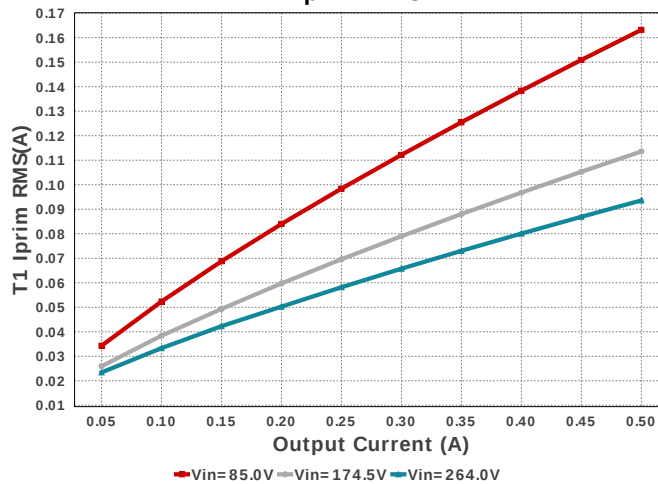

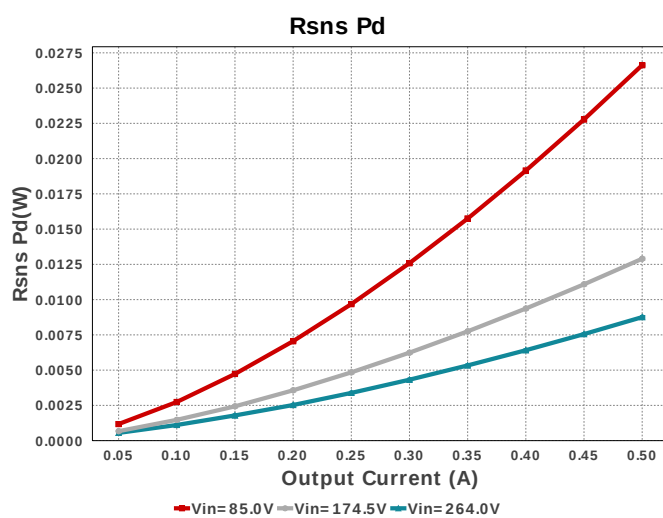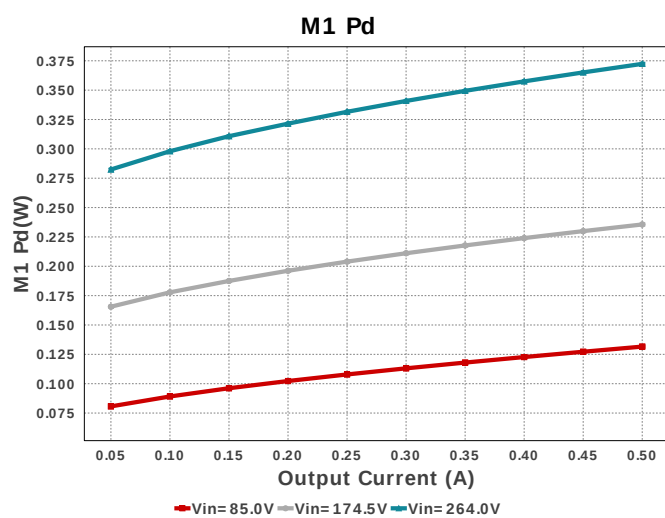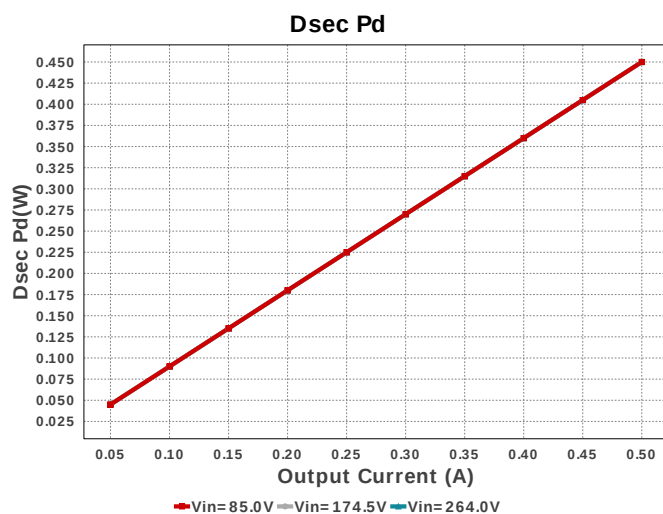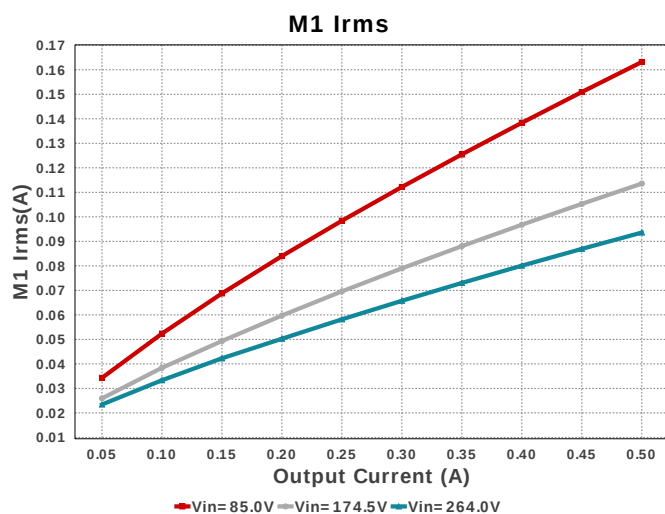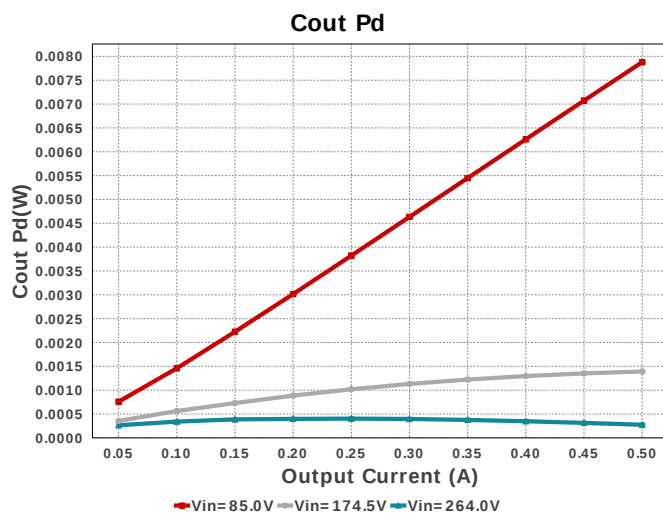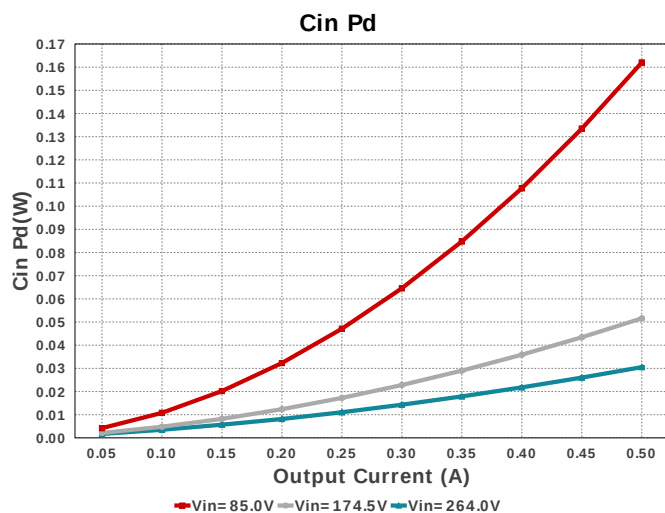

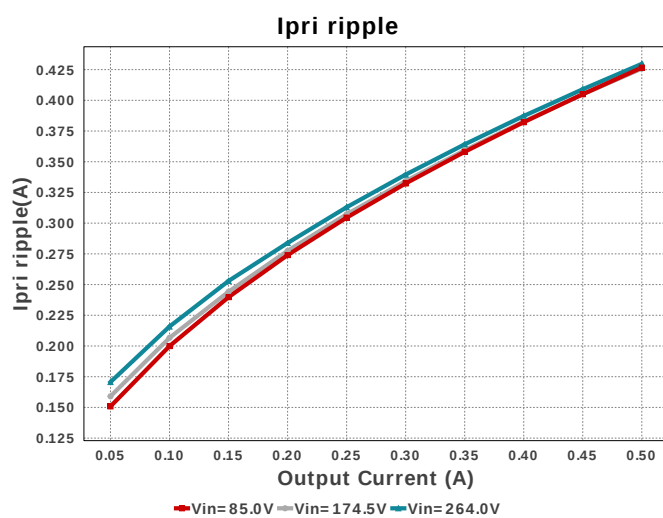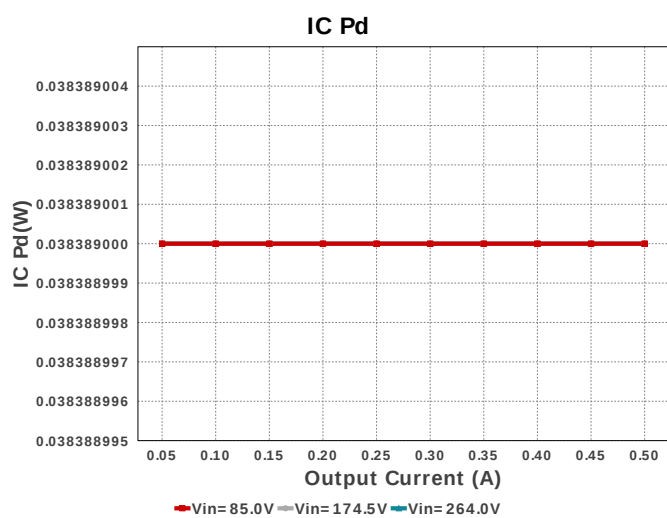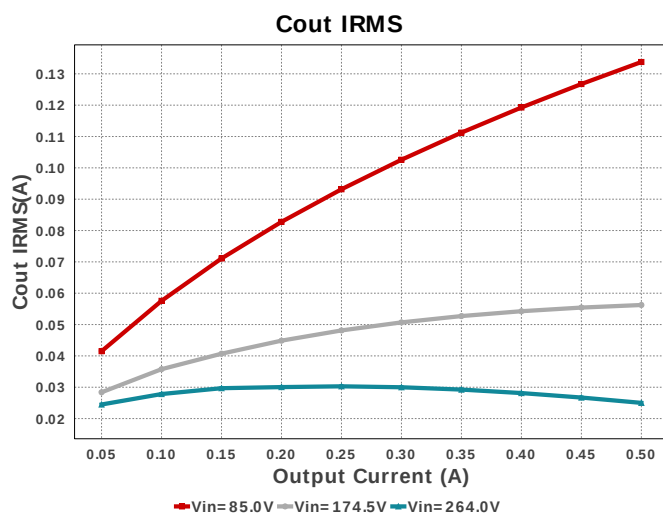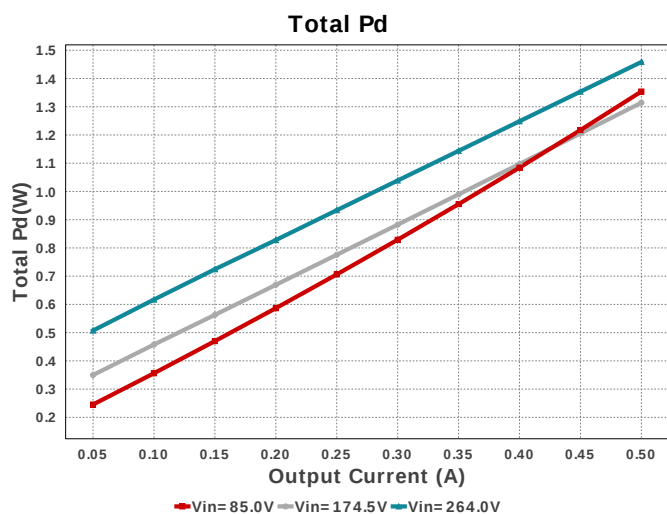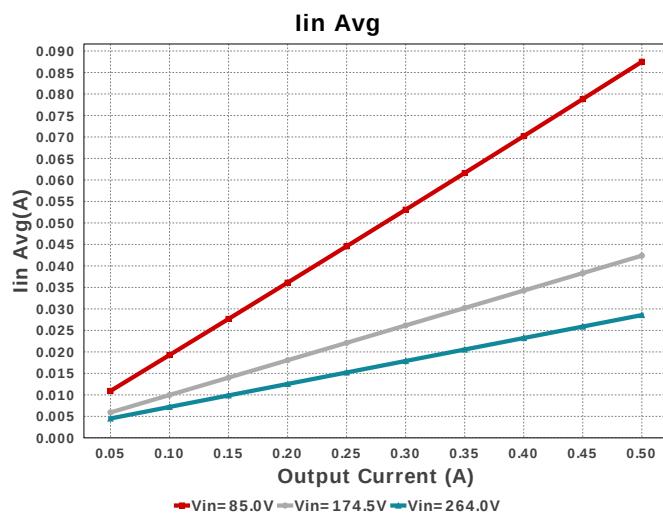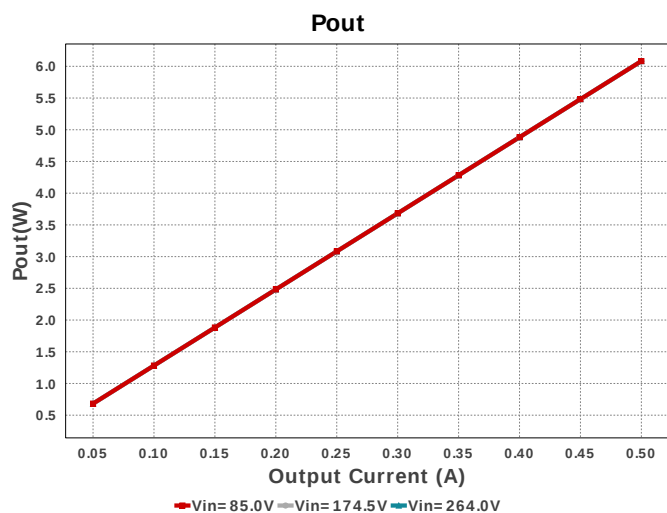

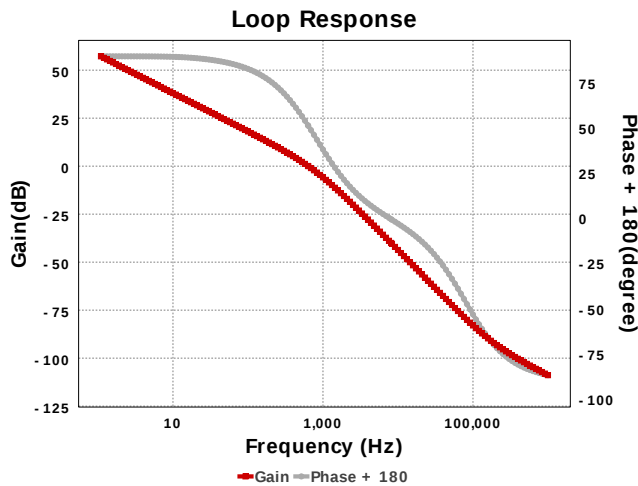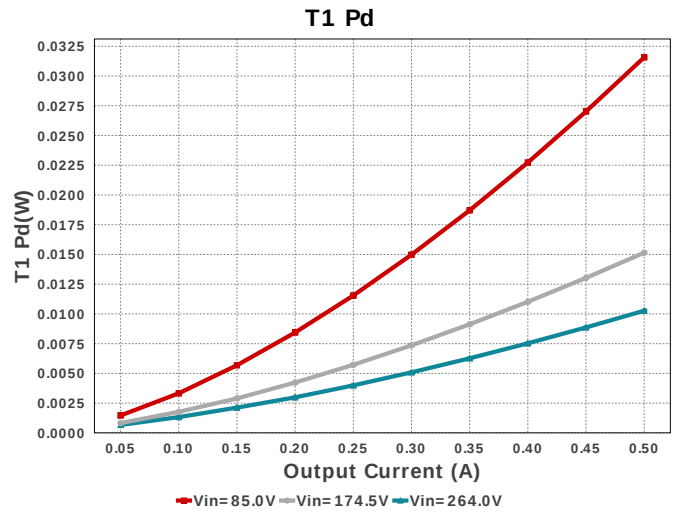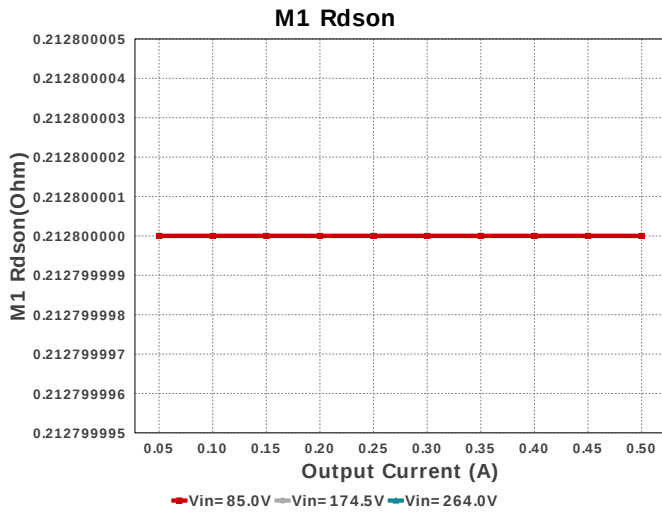

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	205.399 mA	Capacitor	Input capacitor RMS ripple current
2.	Cin Pd	161.83 mW	Capacitor	Input capacitor power dissipation
3.	Cout IRMS	133.697 mA	Capacitor	Output capacitor RMS ripple current
4.	Cout Pd	7.87 mW	Capacitor	Output capacitor power dissipation
5.	Dsec Pd	450.0 mW	Diode	Secondary Diode Power Dissipation
6.	IC Pd	38.389 mW	IC	IC power dissipation
7.	IC Tj	36.269 degC	IC	IC junction temperature
8.	IC ThetaJA	163.3 degC/W	IC	IC junction-to-ambient thermal resistance
9.	Iin Avg	87.477 mA	IC	Average input current
10.	M1 Irms	163.13 mA	Mosfet	Q Iavg
11.	M1 Pd	131.58 mW	Mosfet	MOSFET power dissipation
12.	M1 Rdson	212.8 mOhm	Mosfet	Drain-Source On-resistance
13.	M1 TjOP	38.21 degC	Mosfet	M1 MOSFET junction temperature
14.	Cin Pd	161.83 mW	Power	Input capacitor power dissipation
15.	Cout Pd	7.87 mW	Power	Output capacitor power dissipation
16.	Dsec Pd	450.0 mW	Power	Secondary Diode Power Dissipation
17.	IC Pd	38.389 mW	Power	IC power dissipation
18.	M1 Pd	131.58 mW	Power	MOSFET power dissipation
19.	Rsns Pd	26.611 mW	Power	Current Limit Sense Resistor Power Dissipation
20.	T1 Pd	31.547 mW	Power	Estimated Losses in Transformer
21.	Total Pd	1.353 W	Power	Total Power Dissipation
22.	Rsns Pd	26.611 mW	Resistor	Current Limit Sense Resistor Power Dissipation
23.	BOM Count	32	System	Total Design BOM count
24.	Cross Freq	636.796 Hz	System	Bode plot crossover frequency
25.	Duty Cycle	43.864 %	System	Duty cycle
26.	Efficiency	81.8 %	System	Steady state efficiency
27.	FootPrint	933.0 mm ²	System	Total Foot Print Area of BOM components

#	Name	Value	Category	Description
28.	Frequency	129.746 kHz	System Information	Switching frequency
29.	Gain Marg	-34.175 dB	System Information	Bode Plot Gain Margin
30.	Iout	500.0 mA	System Information	Iout operating point
31.	Low Freq Gain	57.207 dB	System Information	Gain at 1Hz
32.	Mode	DCM	System Information	Conduction Mode
33.	Phase Marg	51.16 deg	System Information	Bode Plot Phase Margin
34.	Pout	6.082 W	System Information	Total output power
35.	Total BOM	NA	System Information	Total BOM Cost
36.	Vin	85.0 V	System Information	Vin operating point
37.	Vout	12.0 V	System Information	Operational Output Voltage
38.	Vout Actual	11.618 V	System Information	Vout Actual calculated based on selected voltage divider resistors
39.	Vout Tolerance	1.586 %	System Information	Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
40.	Vout p-p	1.086 V	System Information	Peak-to-peak output ripple voltage
41.	Ipri ripple	426.621 mA	Transformer	Ripple Current in the Primary Winding
42.	Isec Ripple	2.749 A	Transformer	Ripple Current in the Secondary Winding
43.	T1 Iprim RMS	163.13 mA	Transformer	Transformer Primary RMS Current
44.	T1 Iprim pk	426.621 mA	Transformer	Transformer Primary Peak Current
45.	T1 Is1 RMS	1.051 A	Transformer	Transformer Secondary1 RMS Current
46.	T1 Pd	31.547 mW	Transformer	Estimated Losses in Transformer

Design Inputs

Name	Value	Description
Iout	500.0 m	Maximum Output Current
VinMax	264.0	Maximum input voltage
VinMin	85.0	Minimum input voltage
Vout	12.0	Output Voltage
acFrequency	60.0	AC Frequency
base_pn	LM5021-1	Base Product Number
source	DC	Input Source Type
Ta	30.0	Ambient temperature

WEBENCH® Assembly

Component Testing

Some published data on components in datasheets such as Capacitor ESR and Inductor DC resistance is based on conservative values that will guarantee that the components always exceed the specification. For design purposes it is usually better to work with typical values. Since this data is not always available it is a good practice to measure the Capacitance and ESR values of C_{in} and C_{out} , and the inductance and DC resistance of $L1$ before assembly of the board. Any large discrepancies in values should be electrically simulated in WEBENCH to check for instabilities and thermally simulated in WebTHERM to make sure critical temperatures are not exceeded.

Soldering Component to Board


If board assembly is done in house it is best to tack down one terminal of a component on the board then solder the other terminal. For surface mount parts with large tabs, such as the DPAK, the tab on the back of the package should be pre-tinned with solder, then tacked into place by one of the pins. To solder the tab down to the board place the iron down on the board while resting against the tab, heating both surfaces simultaneously. Apply light pressure to the top of the plastic case until the solder flows around the part and the part is flush with the PCB. If the solder is not flowing around the board you may need a higher wattage iron (generally 25W to 30W is enough).

Initial Startup of Circuit

It is best to initially power up the board by setting the input supply voltage to the lowest operating input voltage 85.0V and set the input supply's current limit to zero. With the input supply off connect up the input supply to V_{in} and GND. Connect a digital volt meter and a load if needed to set the minimum load of the design from V_{out} and GND. Turn on the input supply and slowly turn up the current limit on the input supply. If the voltage starts to rise on the input supply continue increasing the input supply current limit while watching the output voltage. If the current increases on the input supply, but the voltage remains near zero, then there may be a short or a component misplaced on the board. Power down the board and visually inspect for solder bridges and recheck the diode and capacitor polarities. Once the power supply circuit is operational then more extensive testing may include full load testing, transient load and line tests to compare with simulation results.

Load Testing

The setup is the same as the initial startup, except that an additional digital voltmeter is connected between V_{in} and GND, a load is connected between V_{out} and GND and a current meter is connected in series between V_{out} and the load. The load must be able to handle at least rated output power + 50% (7.5 watts for this design). Ideally the load is supplied in the form of a variable load test unit. It can also be done in the form of suitably large power resistors. When using an oscilloscope to measure waveforms on the prototype board, the ground leads of the oscilloscope probes should be as short as possible and the area of the loop formed by the ground lead should be kept to a minimum. This will help reduce ground lead inductance and eliminate EMI noise that is not actually present in the circuit.

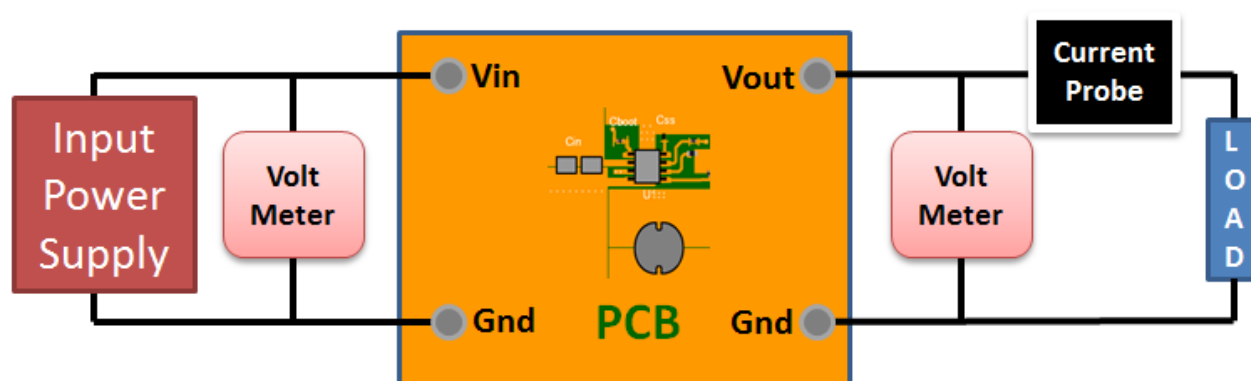

WEBENCH® Transformer Report

#	Name	Value
1.	Core Part Number	B65805P0000R049
2.	Core Manufacturer	TDK
3.	Coil Former Part Number	B65822F1008T001
4.	Coil Former Manufacturer	TDK

Transformer Electrical Diagram

Primary


Turns	58.0
AWG	40.0
Layers	4.0
Strands	3.0
Insulation Type	Heavy Insulated Magnet Wire

Auxiliary


Turns	12.0
AWG	28.0
Layers	1.0
Strands	1.0
Insulation Type	Heavy Insulated Magnet Wire

Secondary

Turns	9.0
AWG	33.0
Layers	1.0
Strands	1.0
Insulation Type	Triple Insulated

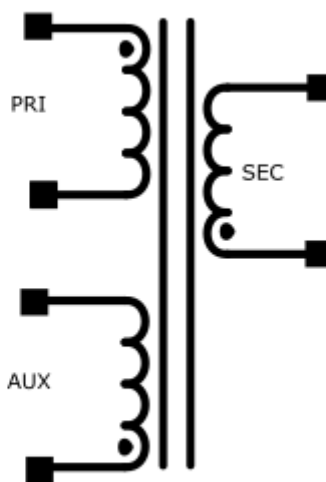

Transformer Construction Diagram

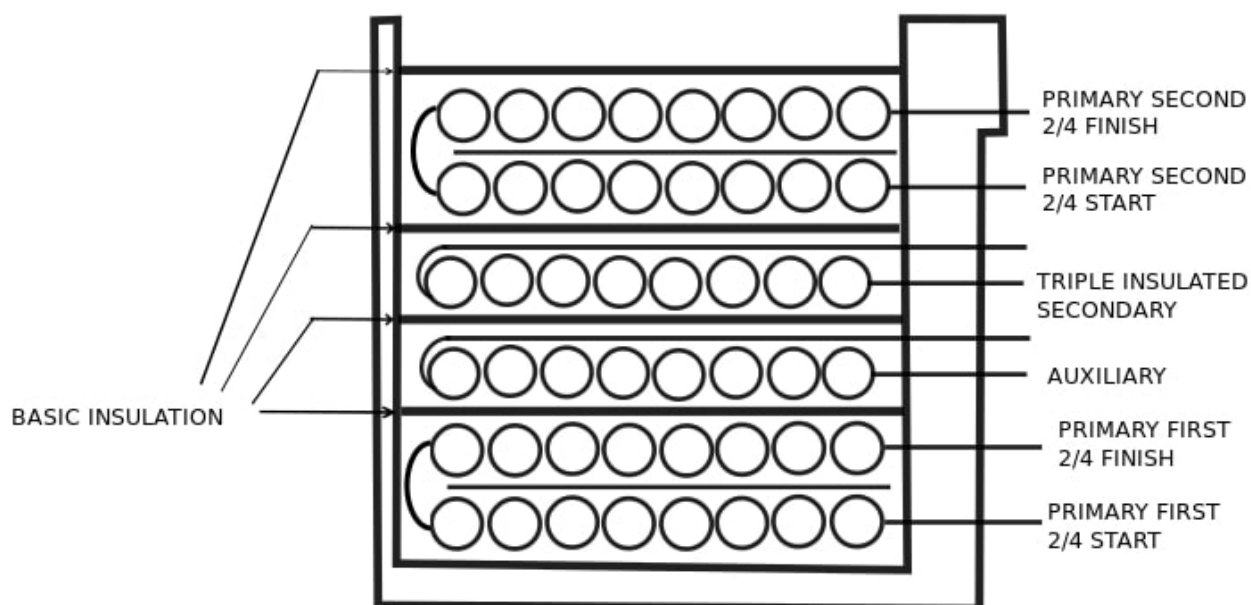

Winding Instruction

Winding	AWG	Turns	Winding Orientation
Primary First 2/4.0	40.0	29	Clockwise
Auxiliary	28.0	12.0	Counter Clockwise
Triple Insulated Secondary	33.0	9.0	Counter Clockwise
Primary Second 2/4.0	40.0	29	Clockwise

Transformer Parameters

#	Name	Value
1.	Lpri	6.74E-4H
2.	Inductance Factor(Al)	201.0nH
3.	Npri	58.0
4.	Nsec	9.0
5.	Naux	12.0
6.	Core Type	RM5
7.	Core Material	N49
8.	Bmax	0.20T
9.	Switching Frequency	129.75kHz
10.	DMax	0.5
11.	Ipk(Primary)	0.42A
12.	Irms(Primary)	0.17A
13.	Ipk(Secondary)	2.68A
14.	Irms(Secondary)	1.09A

Design Assistance

1. Isolated feedback, DC-DC Flyback controller with wide Vin range
2. Master key : 5BA117B9C73A47F3[v1]
3. **LM5021-1** Product Folder : <http://www.ti.com/product/LM5021> : contains the data sheet and other resources.

Important Notice and Disclaimer

TI provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources AS IS and with all faults, and disclaims all warranties. These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

Providing these resources does not expand or otherwise alter TI's applicable Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with TI products.