








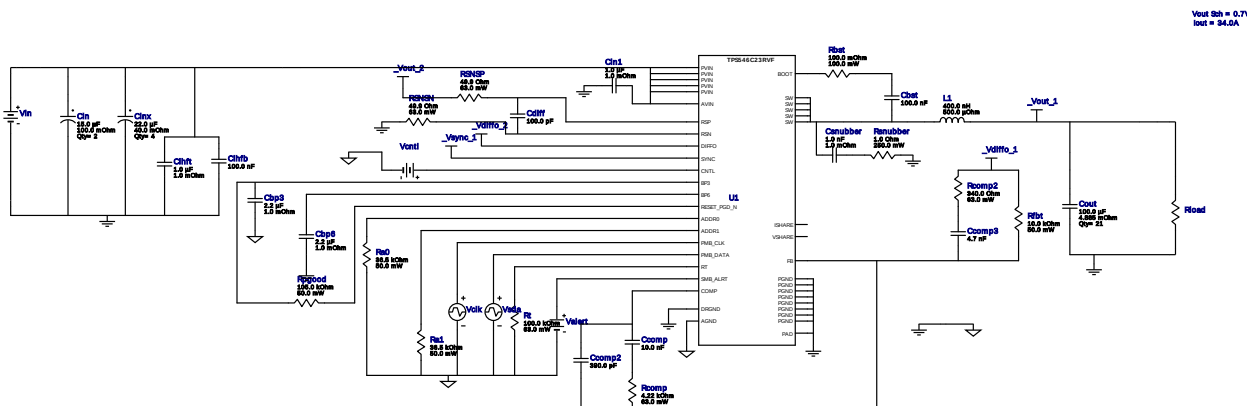








Device = TPS546C23RVFR
Topology = Buck
Created = 2021-06-29 23:39:22.119
BOM Cost = \$17.66
BOM Count = 51
Total Pd = 7.88W















Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
Cin	Panasonic	25TQC15MYFB Series= TQC	Cap= 15.0 uF ESR= 100.0 mOhm VDC= 25.0 V IRMS= 900.0 mA	2	\$0.42	 3528-21 17 mm ²
Cin1	Taiyo Yuden	TMK212B7105KG-T Series= X7R	Cap= 1.0 uF ESR= 1.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.02	 0805 7 mm ²
Cinx	Panasonic	EEFCX1E220R Series= CX	Cap= 22.0 uF ESR= 40.0 mOhm VDC= 25.0 V IRMS= 3.2 A	4	\$0.58	 7343-20 59 mm ²
Cout	MuRata	GRM31CR60J107ME39L Series= X5R	Cap= 100.0 uF ESR= 4.885 mOhm VDC= 6.3 V IRMS= 4.4118 A	21	\$0.34	 1206_190 11 mm ²
Csubber	Yageo	CC0805KRX7R9BB102 Series= X7R	Cap= 1.0 nF ESR= 1.0 mOhm VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
L1	Coilcraft	XAL1580-401MEB	L= 400.0 nH 500.0 µOhm	1	\$2.40	 XAL1580 313 mm ²
RSNSN	Vishay-Dale	CRCW040249R9FKED Series= CRCW..e3	Res= 49.9 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
RSNSP	Vishay-Dale	CRCW040249R9FKED Series= CRCW..e3	Res= 49.9 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
Ra0	Yageo	RC0201FR-0736K5L Series= ?	Res= 36.5 kOhm Power= 50.0 mW Tolerance= 1.0%	1	\$0.01	 0201 2 mm ²
Ra1	Yageo	RC0201FR-0736K5L Series= ?	Res= 36.5 kOhm Power= 50.0 mW Tolerance= 1.0%	1	\$0.01	 0201 2 mm ²
Rbst	Panasonic	ERJ-3RSFR10V Series= ERJ-3R	Res= 100.0 mOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.03	 0603 5 mm ²
Rcomp	Vishay-Dale	CRCW04024K22FKED Series= CRCW..e3	Res= 4.22 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
Rcomp2	Vishay-Dale	CRCW0402340RFKED Series= CRCW..e3	Res= 340.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
Rfbt	Yageo	RC0201FR-0710KL Series= ?	Res= 10.0 kOhm Power= 50.0 mW Tolerance= 1.0%	1	\$0.01	 0201 2 mm ²
Rpgood	Yageo	RC0201FR-07105KL Series= ?	Res= 105.0 kOhm Power= 50.0 mW Tolerance= 1.0%	1	\$0.01	 0201 2 mm ²
Rsubber	Vishay-Dale	CRCW12061R00FKEA Series= CRCW..e3	Res= 1.0 Ohm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
Rt	Vishay-Dale	CRCW0402100KFKEA Series= CRCW..e3	Res= 100.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²


Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
U1	Texas Instruments	TPS546C23RVFR	Switcher	1	\$4.51	 RVF0040A 63 mm ²

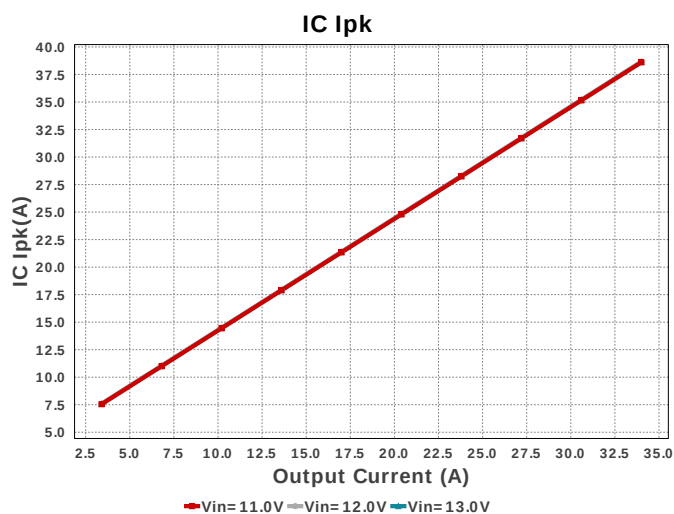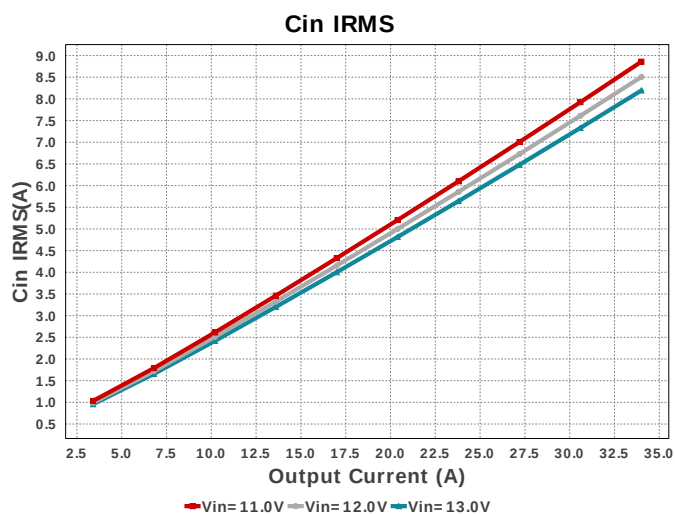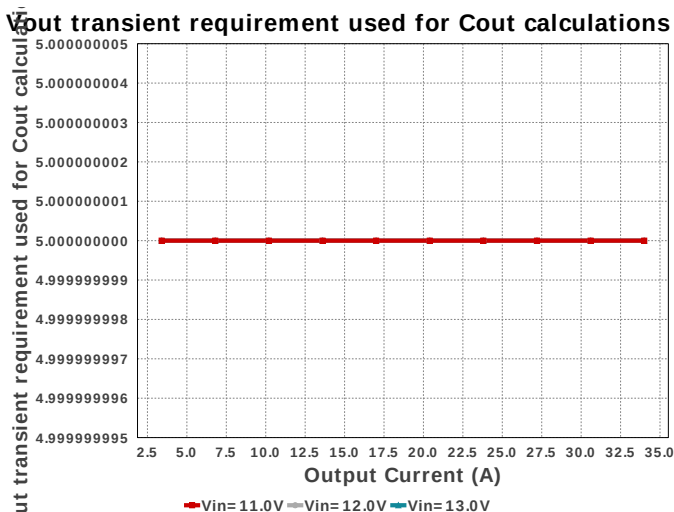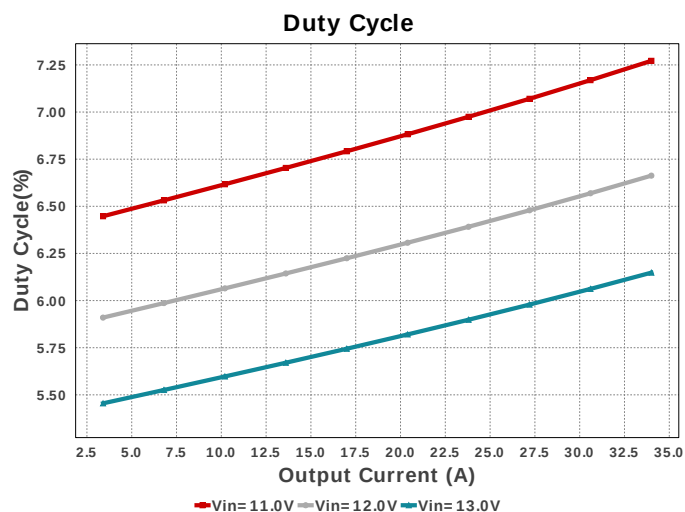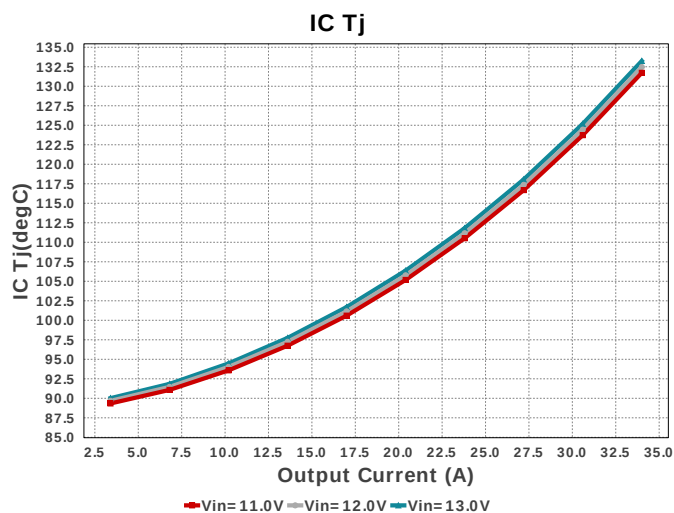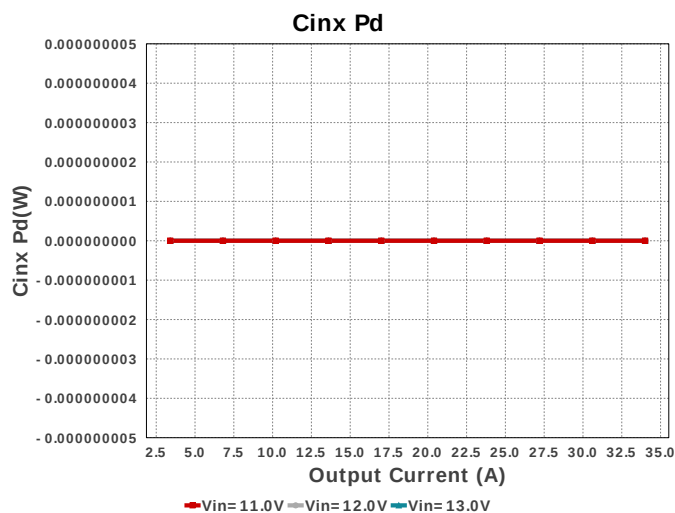

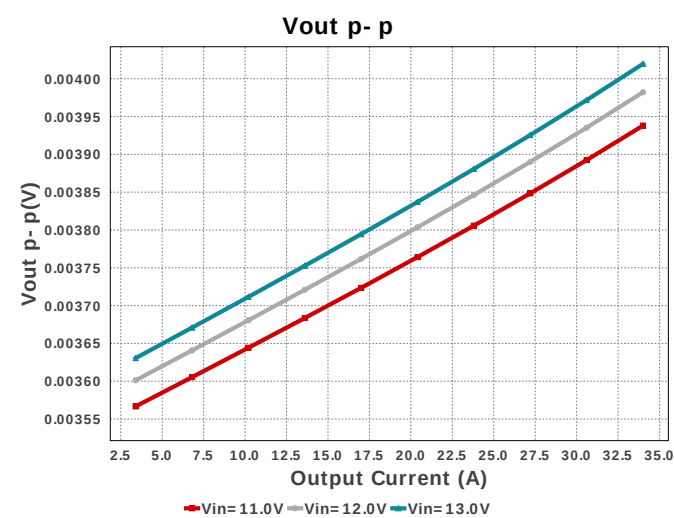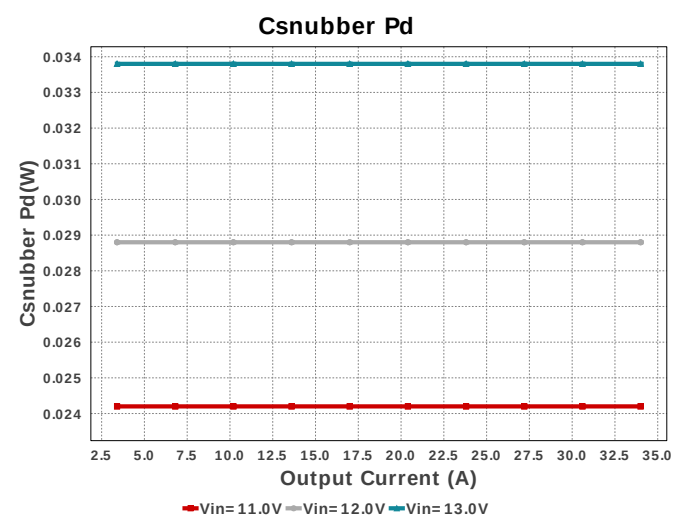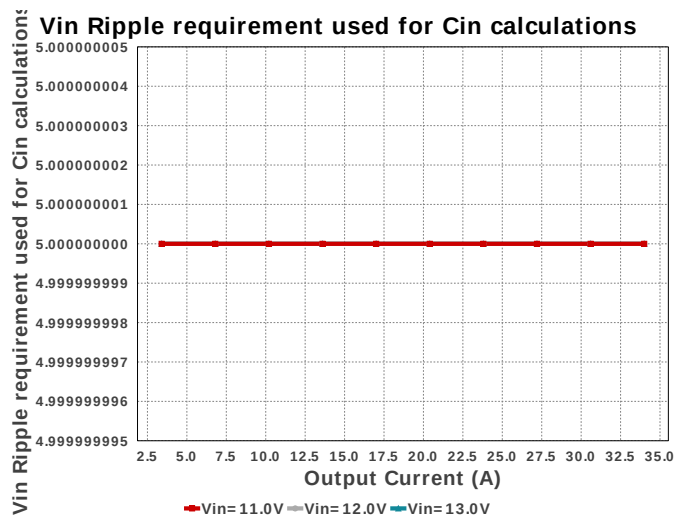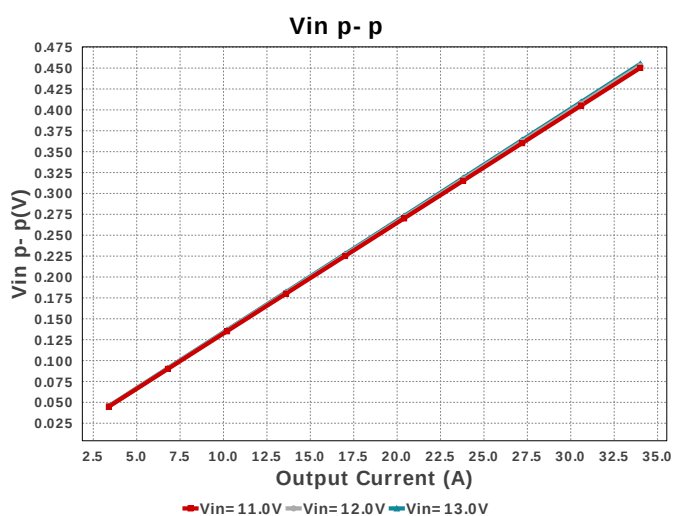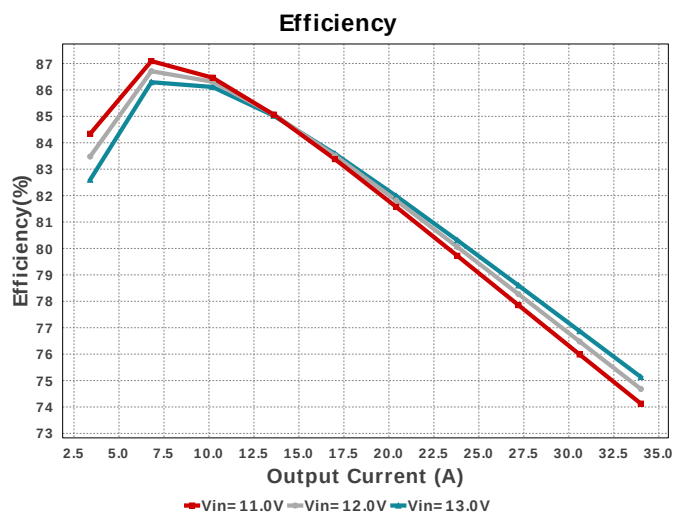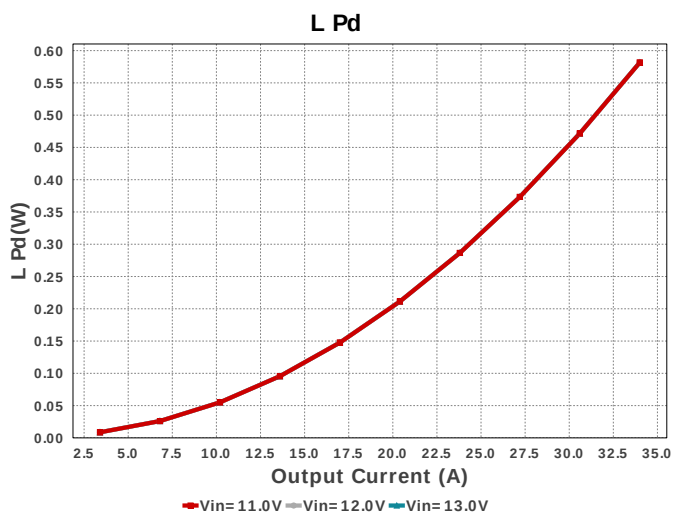

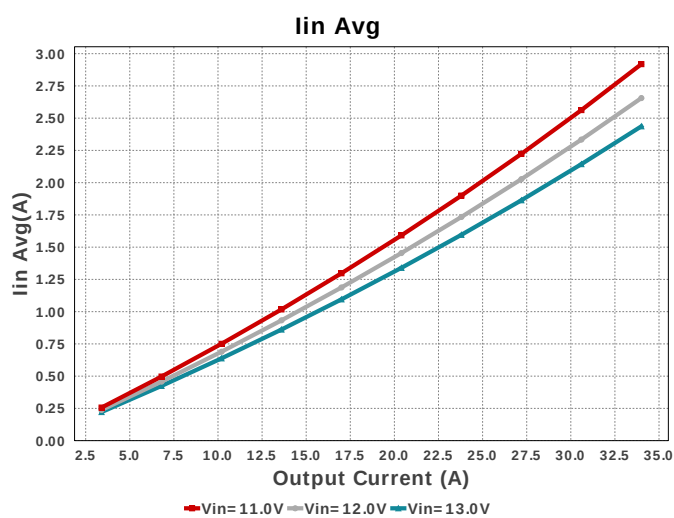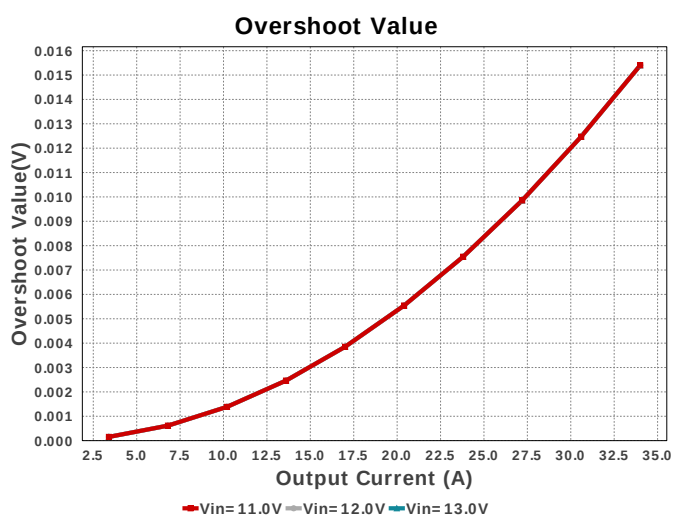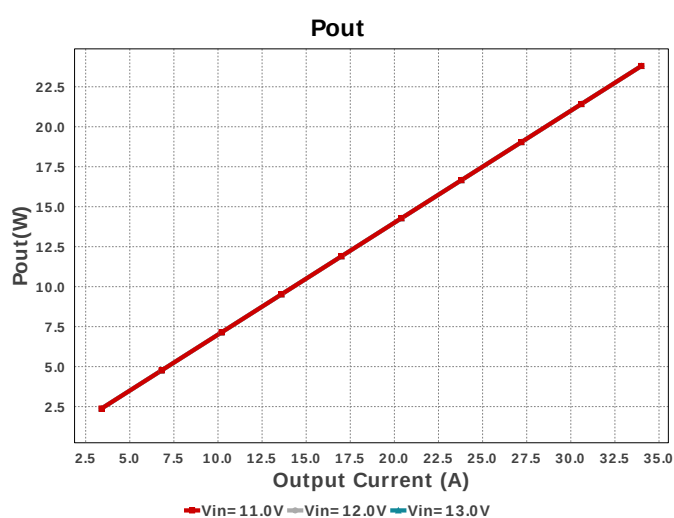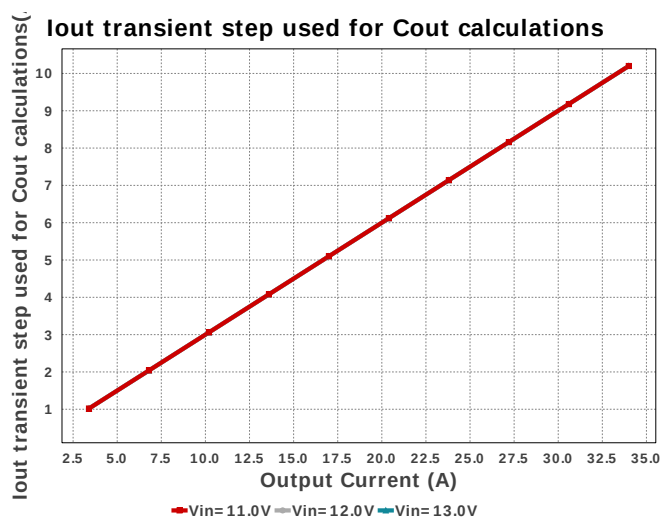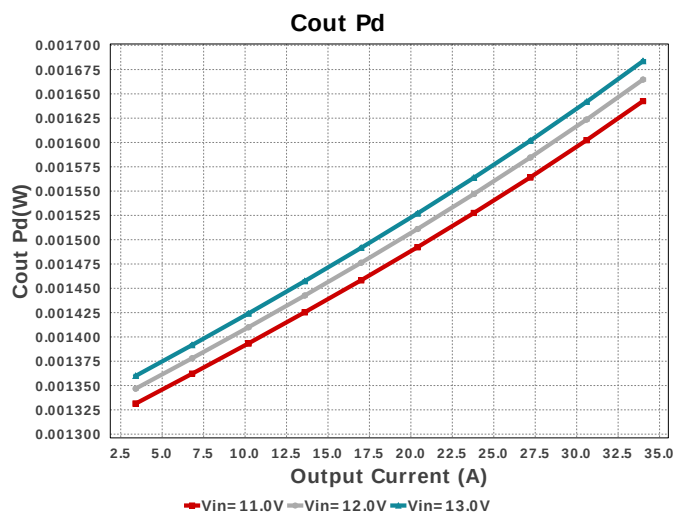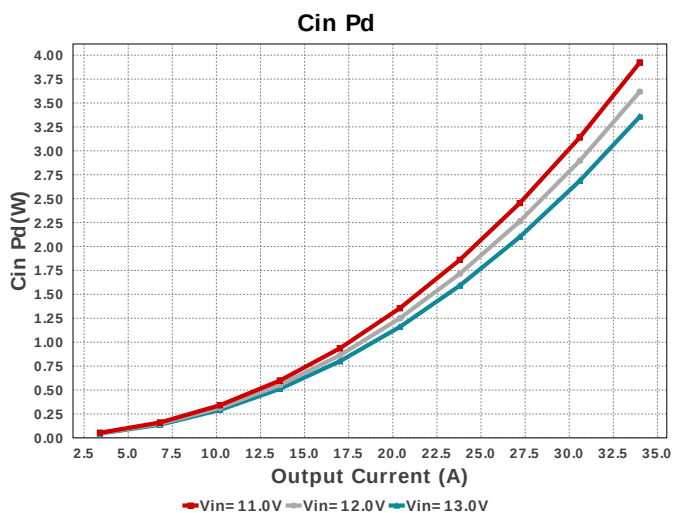

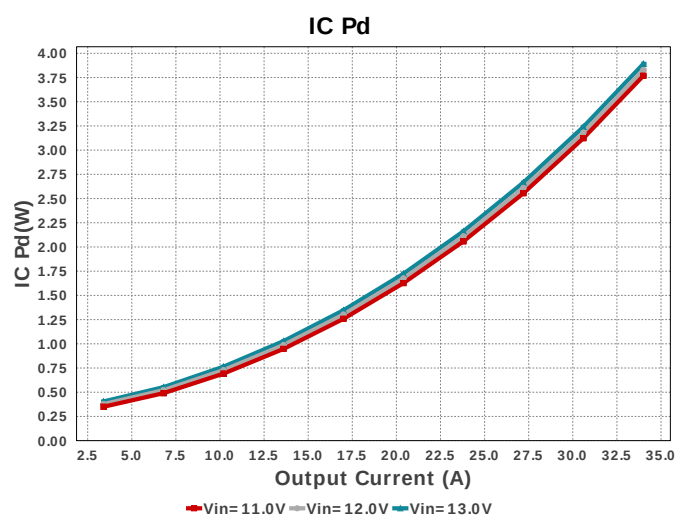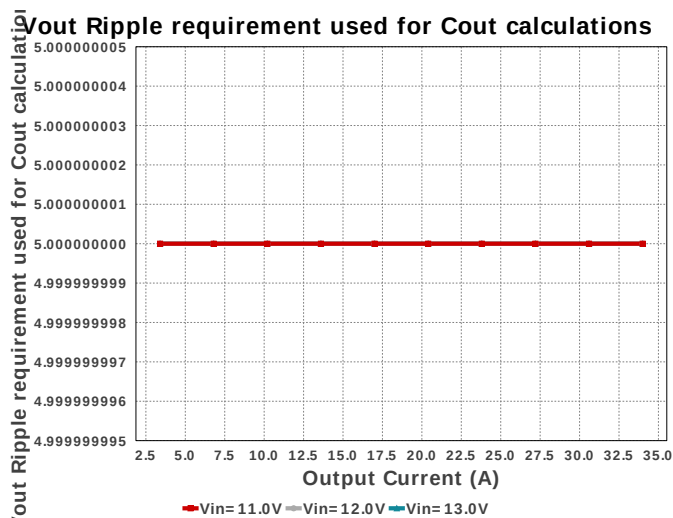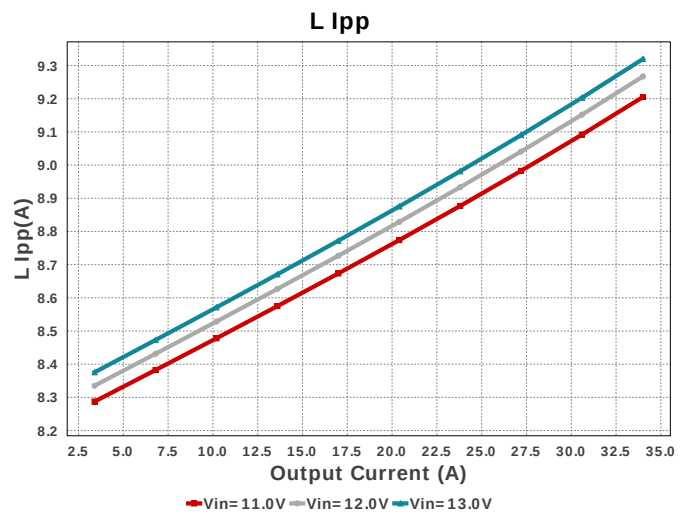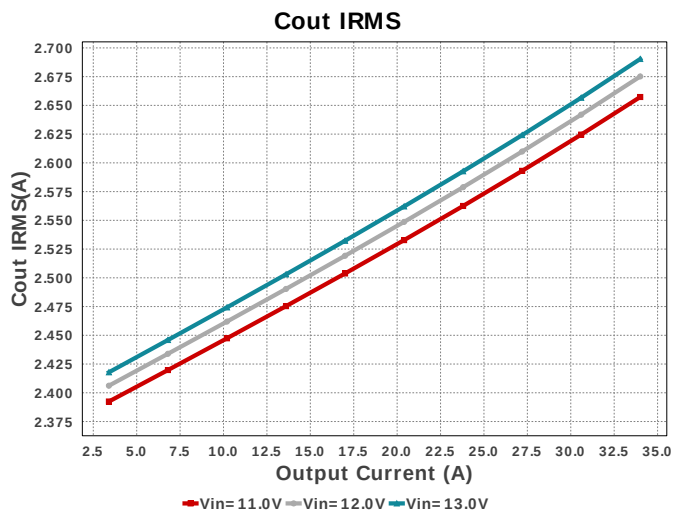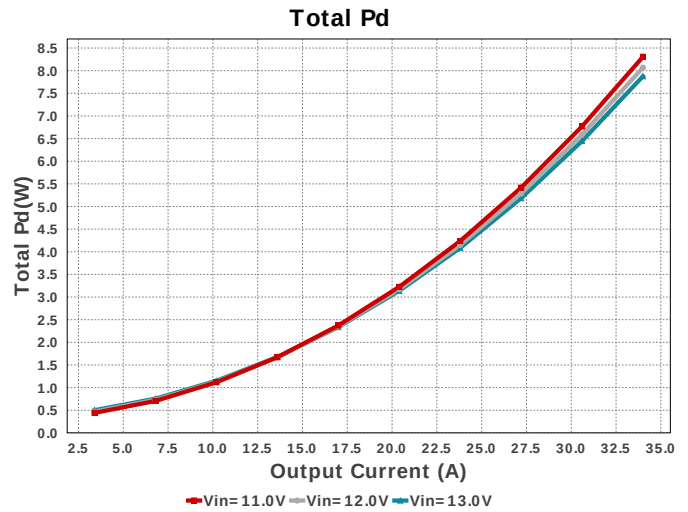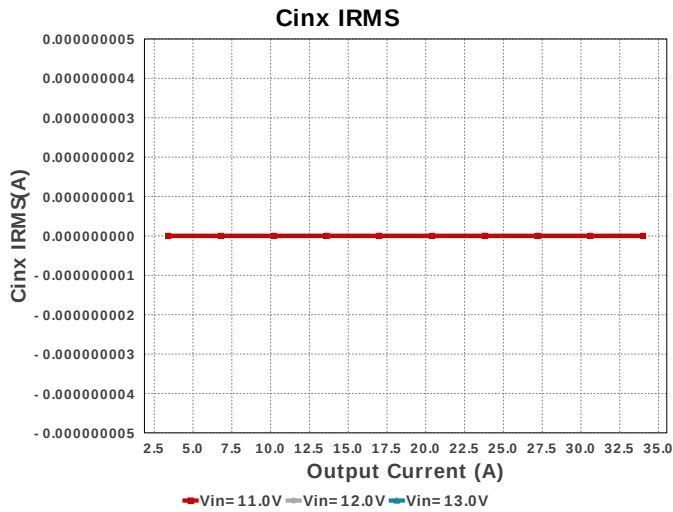

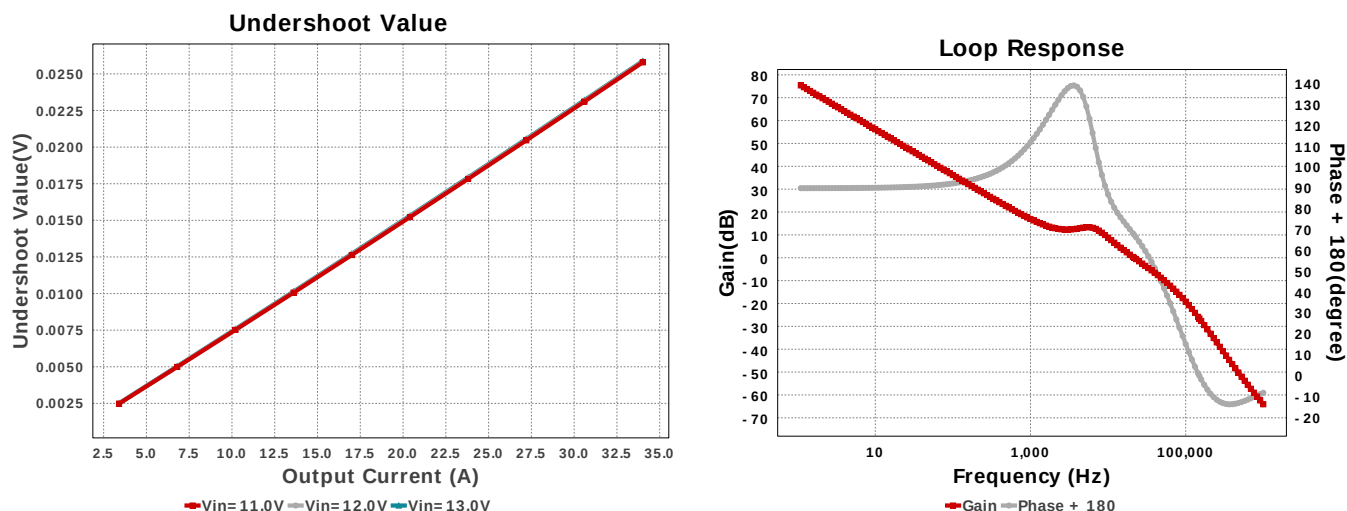

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	8.194 A	Capacitor	Input capacitor RMS ripple current
2.	Cin Pd	3.357 W	Capacitor	Input capacitor power dissipation
3.	Cinx IRMS	12.8 A	Capacitor	Bulk capacitor RMS ripple current
4.	Cinx Pd	0.0 W	Capacitor	Bulk capacitor power dissipation
5.	Cout IRMS	2.69 A	Capacitor	Output capacitor RMS ripple current
6.	Cout Pd	1.684 mW	Capacitor	Output capacitor power dissipation
7.	Csnubber Pd	33.8 mW	Capacitor	Snubber Power Dissipation
8.	IC Ipk	38.66 A	IC	Peak switch current in IC
9.	IC Pd	3.891 W	IC	IC power dissipation
10.	IC Tj	133.246 degC	IC	IC junction temperature
11.	ICThetaJA Effective	12.4 degC/W	IC	Effective IC Junction-to-Ambient Thermal Resistance
12.	Iin Avg	2.437 A	IC	Average input current
13.	L Ipp	9.32 A	Inductor	Peak-to-peak inductor ripple current
14.	L Pd	581.62 mW	Inductor	Inductor power dissipation
15.	PMBus Vout Command	358.0	PMBus	PMBus Vout Command
16.	PMBus Vout Scale Loop	1.0	PMBus	PMBus Vout Scale Loop
17.	Cin Pd	3.357 W	Power	Input capacitor power dissipation
18.	Cinx Pd	0.0 W	Power	Bulk capacitor power dissipation
19.	Cout Pd	1.684 mW	Power	Output capacitor power dissipation
20.	Csnubber Pd	33.8 mW	Power	Snubber Power Dissipation
21.	IC Pd	3.891 W	Power	IC power dissipation
22.	L Pd	581.62 mW	Power	Inductor power dissipation
23.	Total Pd	7.877 W	Power	Total Power Dissipation
24.	BOM Count	51	System Information	Total Design BOM count
25.	Cross Freq	21.672 kHz	System Information	Bode plot crossover frequency
26.	Duty Cycle	6.148 %	System Information	Duty cycle
27.	Efficiency	75.135 %	System Information	Steady state efficiency
28.	FootPrint	983.0 mm ²	System Information	Total Foot Print Area of BOM components
29.	Frequency	200.0 kHz	System Information	Switching frequency
30.	Gain Marg	-26.581 dB	System Information	Bode Plot Gain Margin
31.	Iout	34.0 A	System Information	Iout operating point
32.	Iout transient step used 10.2 A for Cout calculations		System Information	Custom Transient current step requirement that was used for Cout selection (A).
33.	Low Freq Gain	75.362 dB	System Information	Gain at 1Hz
34.	Mode	CCM	System Information	Conduction Mode
35.	Overshoot Value	15.399 mV	System Information	Theoretical Vout Overshoot Value
36.	Phase Marg	67.647 deg	System Information	Bode Plot Phase Margin
37.	Pout	23.8 W	System Information	Total output power

#	Name	Value	Category	Description
38.	Total BOM	\$17.66	System Information	Total BOM Cost
39.	Undershoot Value	25.874 mV	System Information	Theoretical Vout Undershoot Value
40.	Vin	13.0 V	System Information	Vin operating point
41.	Vin Ripple requirement used for Cin calculations	5.0 %	System Information	Custom maximum input ripple requirement that was used for Cin selection(% of Minimum Vin).
42.	Vin p-p	454.918 mV	System Information	Peak-to-peak input voltage
43.	Vout	700.0 mV	System Information	Operational Output Voltage
44.	Vout Ripple requirement used for Cout calculations	5.0 %	System Information	Custom maximum output ripple requirement that was used for Cout selection(% of Vout).
45.	Vout Tolerance	714.29 m%	System Information	Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
46.	Vout p-p	4.02 mV	System Information	Peak-to-peak output ripple voltage
47.	Vout transient requirement used for Cout calculations	5.0 %	System Information	Custom Transient voltage change requirement that was used for Cout selection (% of Vout).

Design Inputs

	Name	Value	Description
	Iout	34.0	Maximum Output Current
	VinMax	13.0	Maximum input voltage
	VinMin	11.0	Minimum input voltage
	Vout	700.0 m	Output Voltage
	base_pn	TPS546C23	Base Product Number
	source	DC	Input Source Type
	Ta	85.0	Ambient temperature
	UserFsw	200.0 k	Customer Selected Frequency
1.	Vout Sch	700.0 m	Output voltage selected

WEBENCH® Assembly

Component Testing

Some published data on components in datasheets such as Capacitor ESR and Inductor DC resistance is based on conservative values that will guarantee that the components always exceed the specification. For design purposes it is usually better to work with typical values. Since this data is not always available it is a good practice to measure the Capacitance and ESR values of C_{in} and C_{out} , and the inductance and DC resistance of $L1$ before assembly of the board. Any large discrepancies in values should be electrically simulated in WEBENCH to check for instabilities and thermally simulated in WebTHERM to make sure critical temperatures are not exceeded.

Soldering Component to Board


If board assembly is done in house it is best to tack down one terminal of a component on the board then solder the other terminal. For surface mount parts with large tabs, such as the DPAK, the tab on the back of the package should be pre-tinned with solder, then tacked into place by one of the pins. To solder the tab down to the board place the iron down on the board while resting against the tab, heating both surfaces simultaneously. Apply light pressure to the top of the plastic case until the solder flows around the part and the part is flush with the PCB. If the solder is not flowing around the board you may need a higher wattage iron (generally 25W to 30W is enough).

Initial Startup of Circuit

It is best to initially power up the board by setting the input supply voltage to the lowest operating input voltage 11.0V and set the input supply's current limit to zero. With the input supply off connect up the input supply to V_{in} and GND. Connect a digital volt meter and a load if needed to set the minimum load of the design from V_{out} and GND. Turn on the input supply and slowly turn up the current limit on the input supply. If the voltage starts to rise on the input supply continue increasing the input supply current limit while watching the output voltage. If the current increases on the input supply, but the voltage remains near zero, then there may be a short or a component misplaced on the board. Power down the board and visually inspect for solder bridges and recheck the diode and capacitor polarities. Once the power supply circuit is operational then more extensive testing may include full load testing, transient load and line tests to compare with simulation results.

Load Testing

The setup is the same as the initial startup, except that an additional digital voltmeter is connected between V_{in} and GND, a load is connected between V_{out} and GND and a current meter is connected in series between V_{out} and the load. The load must be able to handle at least rated output power + 50% (7.5 watts for this design). Ideally the load is supplied in the form of a variable load test unit. It can also be done in the form of suitably large power resistors. When using an oscilloscope to measure waveforms on the prototype board, the ground leads of the oscilloscope probes should be as short as possible and the area of the loop formed by the ground lead should be kept to a minimum. This will help reduce ground lead inductance and eliminate EMI noise that is not actually present in the circuit.

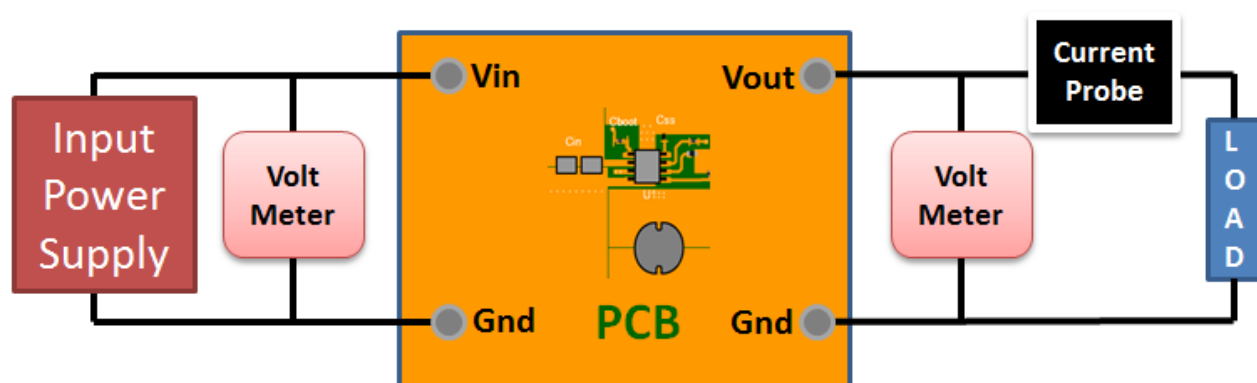


WEBENCH® Electrical Simulation Report

Design Id = 817


sim_id = 1

Simulation Type = Steady State

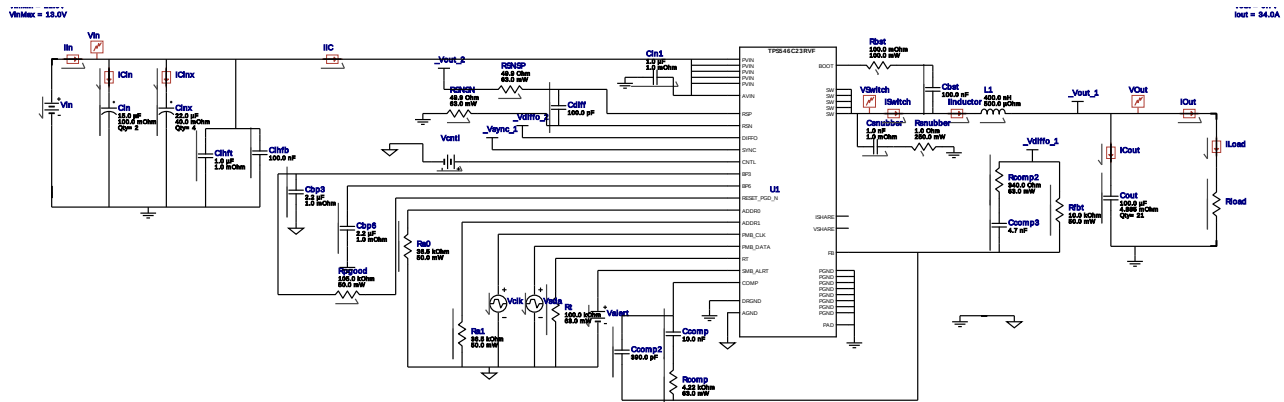

Simulation Parameters

#	Name	Parameter Name	Description	Values
1.	Cbp6	IC	Initial Voltage	6.6 V
2.	Cihft	IC	Initial Voltage	12.0 V
3.	Cbp3	IC	Initial Voltage	3.3 V
4.	Vcntl	V	Control Voltage	1.5 Volts
5.	Cin	IC	Initial Voltage	12.0 V
6.	Cout	IC	Initial Voltage	0.7 V
7.	Cbst	IC	Initial Voltage	12.0 V
8.	L1	IC	Initial Current	34.0 V
9.	Cihfb	IC	Initial Voltage	12.0 V
10.	Rload	R	Load Resistance	0.020588235294117647 Ohm

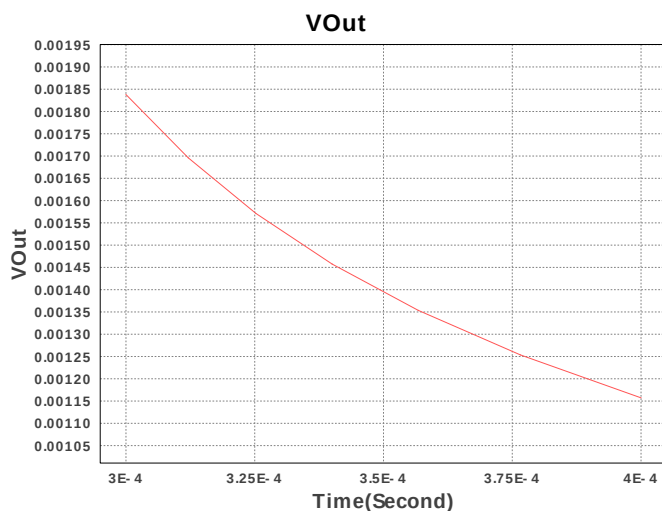

Design Assistance

- Master key : 705BAF3F164BD058[v1]
- TPS546C23 Product Folder : <http://www.ti.com/product/TPS546C23> : contains the data sheet and other resources.

Important Notice and Disclaimer

TI provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources AS IS and with all faults, and disclaims all warranties. These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

Providing these resources does not expand or otherwise alter TI's applicable Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with TI products.