









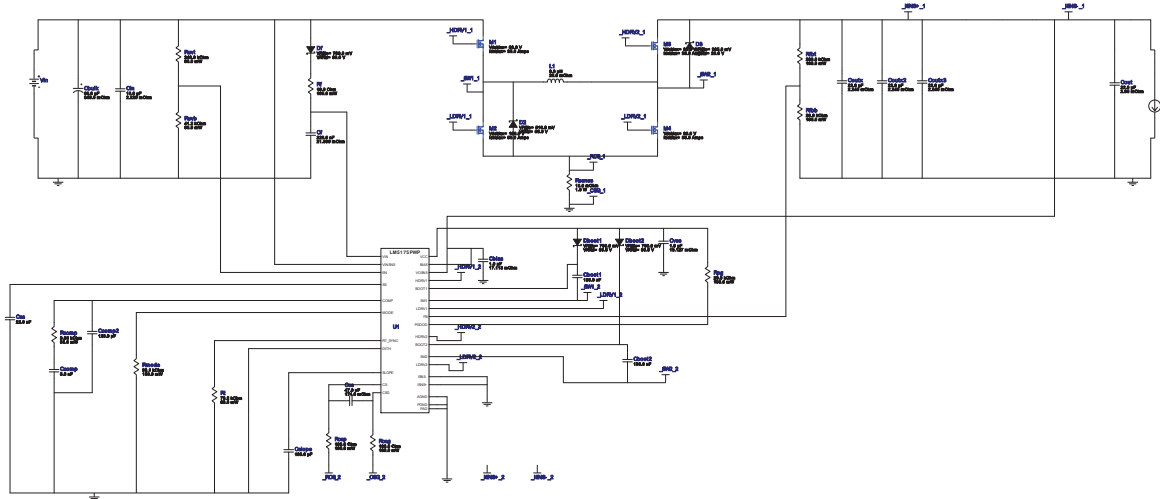












**WEBENCH® Design Report**





 Design : 916945/909 LM5175PWPR  
 LM5175PWPR 9.0V-36.0V to 12.00V @ 3.0A

**My Comments**







No comments







**Electrical BOM**







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cbias	MuRata	GRM188R61E105KA12D Series= X5R	Cap= 1.0 uF ESR= 17.113 mOhm VDC= 25.0 V IRMS= 979.39 mA	1	\$0.01	0603 5 mm <sup>2</sup>
2.	Cboot1	Kemet	C0603C104K3RACTU Series= X7R	Cap= 100.0 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0603 5 mm <sup>2</sup>
3.	Cboot2	Kemet	C0603C104K3RACTU Series= X7R	Cap= 100.0 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0603 5 mm <sup>2</sup>
4.	Cbulk	Nichicon	UUD1H680MNL1GS Series= uD	Cap= 68.0 uF ESR= 340.0 mOhm VDC= 50.0 V IRMS= 300.0 mA	1	\$0.20	 SM_RADIAL_8MM 113 mm <sup>2</sup>
5.	Ccomp	Yageo America	CC0805KRX7R9BB562 Series= X7R	Cap= 5.6 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm <sup>2</sup>
6.	Ccomp2	Samsung Electro-Mechanics	CL21C121JB61PNC Series= C0G/NP0	Cap= 120.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm <sup>2</sup>
7.	Ccs	AVX	06035A470JAT2A Series= C0G/NP0	Cap= 47.0 pF ESR= 174.0 mOhm VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0603 5 mm <sup>2</sup>
8.	Cf	TDK	C1608X5R1H224K080AB Series= X5R	Cap= 220.0 nF ESR= 21.699 mOhm VDC= 50.0 V IRMS= 1.125 A	1	\$0.03	0603 5 mm <sup>2</sup>







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
9.	Cin	TDK	C3216X5R1H106K160AB Series= X5R	Cap= 10.0 uF ESR= 2.229 mOhm VDC= 50.0 V IRMS= 4.8593 A	1	\$0.20	 1206_180 11 mm <sup>2</sup>
10.	Cout	TDK	C2012X6S1C226M125AC Series= X6S	Cap= 22.0 uF ESR= 2.05 mOhm VDC= 16.0 V IRMS= 4.5559 A	1	\$0.18	 0805 7 mm <sup>2</sup>
11.	Coutx	TDK	C3216JB1E226M Series= JB	Cap= 22.0 uF ESR= 2.246 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.55	 1206 11 mm <sup>2</sup>
12.	Coutx2	TDK	C3216JB1E226M Series= JB	Cap= 22.0 uF ESR= 2.246 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.55	 1206 11 mm <sup>2</sup>
13.	Coutx3	TDK	C3216JB1E226M Series= JB	Cap= 22.0 uF ESR= 2.246 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.55	 1206 11 mm <sup>2</sup>
14.	Cslope	Samsung Electro-Mechanics	CL10C131JB8NNNC Series= C0G/NP0	Cap= 130.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0603 5 mm <sup>2</sup>
15.	Css	Kemet	C0603C223K3RACTU Series= X7R	Cap= 22.0 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0603 5 mm <sup>2</sup>
16.	Cvcc	MuRata	GRM188R61C105KA93D Series= X5R	Cap= 1.0 uF ESR= 10.127 mOhm VDC= 16.0 V IRMS= 994.63 mA	1	\$0.01	 0603 5 mm <sup>2</sup>
17.	D2	ON Semiconductor	MBRA160T3G	VF@Io= 510.0 mV VRRM= 60.0 V	1	\$0.14	 SMA 37 mm <sup>2</sup>
18.	D3	Comchip Technology	CDBK0520L	VF@Io= 385.0 mV VRRM= 20.0 V	1	\$0.08	 SOD-123F 12 mm <sup>2</sup>
19.	Dboot1	Diodes Inc.	B260A-13-F	VF@Io= 700.0 mV VRRM= 60.0 V	1	\$0.10	 SMA 37 mm <sup>2</sup>
20.	Dboot2	Diodes Inc.	B260A-13-F	VF@Io= 700.0 mV VRRM= 60.0 V	1	\$0.10	 SMA 37 mm <sup>2</sup>
21.	Df	Diodes Inc.	B260A-13-F	VF@Io= 700.0 mV VRRM= 60.0 V	1	\$0.10	 SMA 37 mm <sup>2</sup>
22.	L1	Coilcraft	XAL5050-682MEB	L= 6.8 uH DCR= 26.8 mOhm	1	\$0.92	 XAL5050 54 mm <sup>2</sup>
23.	M1	Texas Instruments	CSD18543Q3A	VdsMax= 60.0 V IdsMax= 35.0 Amps	1	\$0.27	 DNH0008A 18 mm <sup>2</sup>
24.	M2	Texas Instruments	CSD19537Q3	VdsMax= 100.0 V IdsMax= 50.0 Amps	1	\$0.41	 DQG0008A 18 mm <sup>2</sup>
25.	M3	Texas Instruments	CSD17577Q3A	VdsMax= 30.0 V IdsMax= 35.0 Amps	1	\$0.21	 DNH0008A 18 mm <sup>2</sup>
26.	M4	Texas Instruments	CSD17577Q3A	VdsMax= 30.0 V IdsMax= 35.0 Amps	1	\$0.21	 DNH0008A 18 mm <sup>2</sup>
27.	Rcomp	Vishay-Dale	CRCW04028K06FKED Series= CRCW..e3	Res= 8.06 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
28.	Rcsg	Vishay-Dale	CRCW0603100RFKEA Series= CRCW..e3	Res= 100.0 Ohm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm <sup>2</sup>
29.	Rcsp	Vishay-Dale	CRCW0603100RFKEA Series= CRCW..e3	Res= 100.0 Ohm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm <sup>2</sup>
30.	Rf	Yageo America	RC0603FR-0710RL Series= ?	Res= 10.0 Ohm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm <sup>2</sup>
31.	Rfbb	Vishay-Dale	CRCW060320K0FKEA Series= CRCW..e3	Res= 20.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm <sup>2</sup>
32.	Rfbt	Vishay-Dale	CRCW0603280KFKEA Series= CRCW..e3	Res= 280.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm <sup>2</sup>
33.	Rmode	Vishay-Dale	CRCW060393K1FKEA Series= CRCW..e3	Res= 93.1 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm <sup>2</sup>
34.	Rpg	Vishay-Dale	CRCW060320K0FKEA Series= CRCW..e3	Res= 20.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm <sup>2</sup>
35.	Rsense	Susumu Co Ltd	PRL1632-R013-F-T1 Series= PRL1632	Res= 13.0 mOhm Power= 1.0 W Tolerance= 1.0%	1	\$0.19	 0612 11 mm <sup>2</sup>
36.	Rt	Vishay-Dale	CRCW040273K2FKED Series= CRCW..e3	Res= 73.2 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>
37.	Ruvb	Vishay-Dale	CRCW040241K2FKED Series= CRCW..e3	Res= 41.2 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>
38.	Ruvt	Vishay-Dale	CRCW0402249KFKEA Series= CRCW..e3	Res= 249.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>
39.	U1	Texas Instruments	LM5175PWPR	Switcher	1	\$3.10	 PWP0028F_N 98 mm <sup>2</sup>

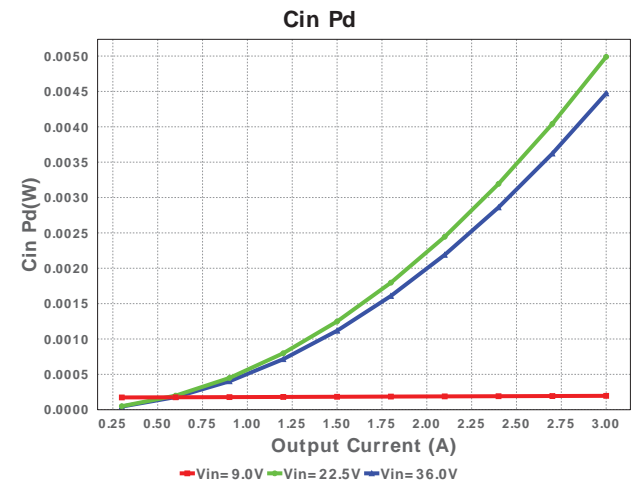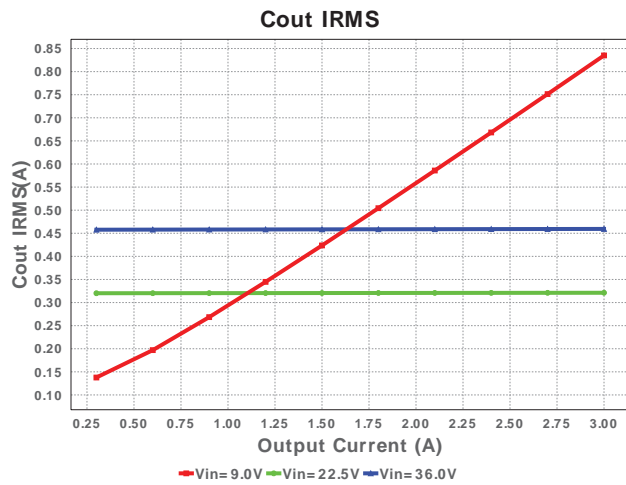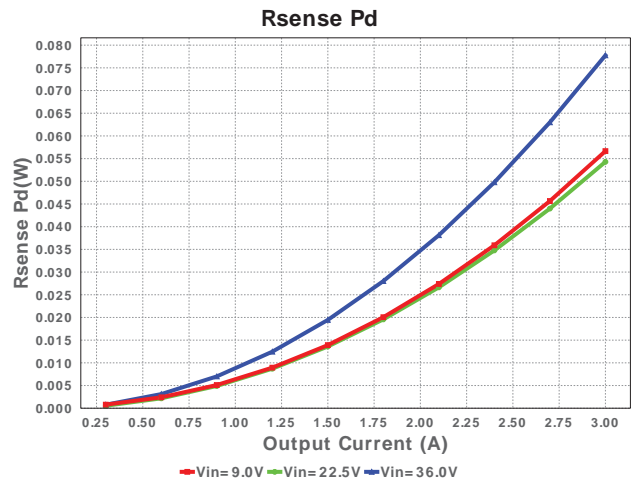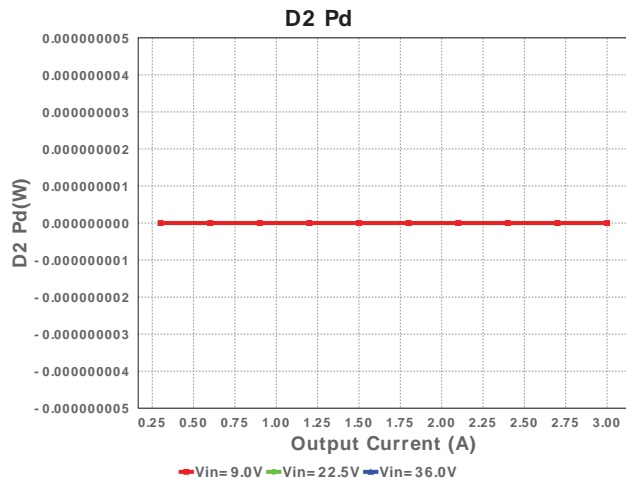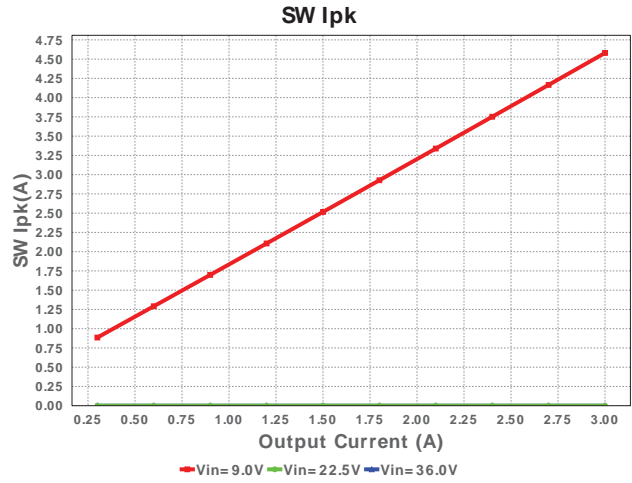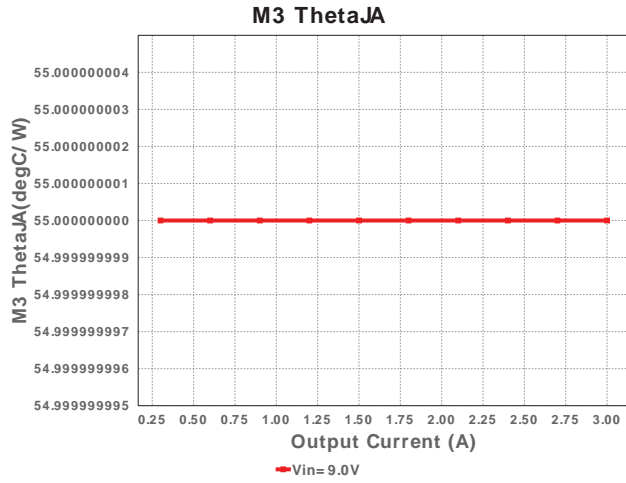

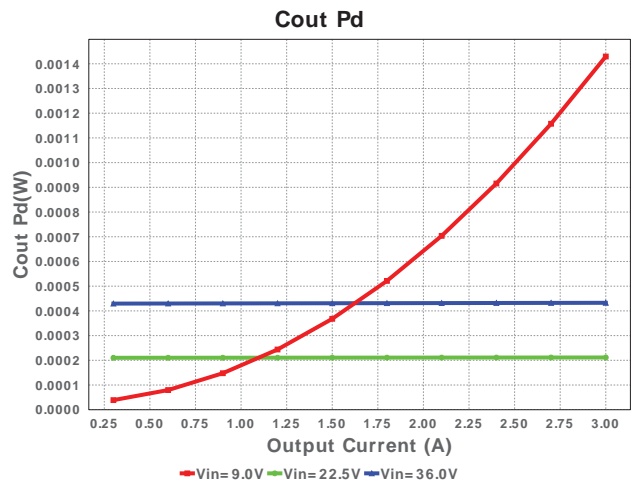
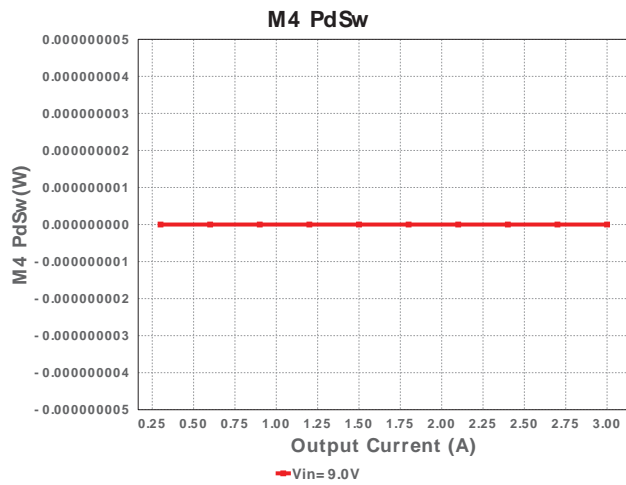
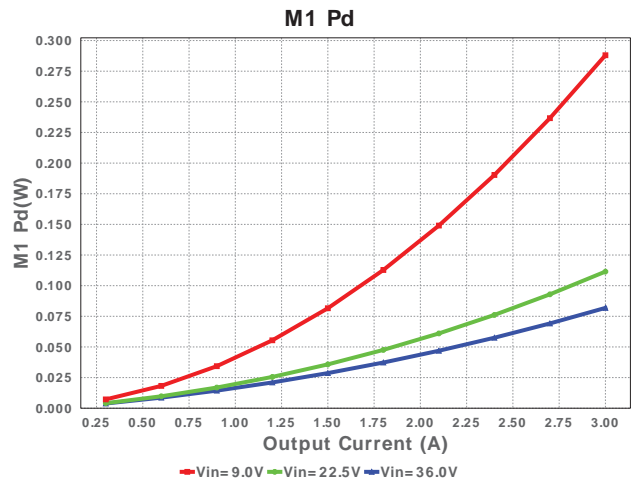
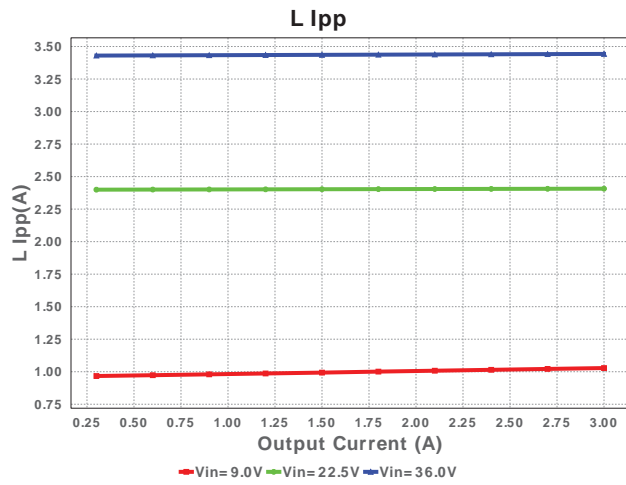
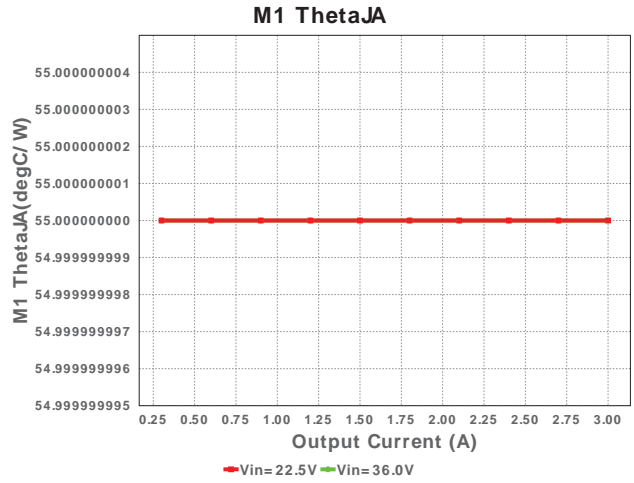
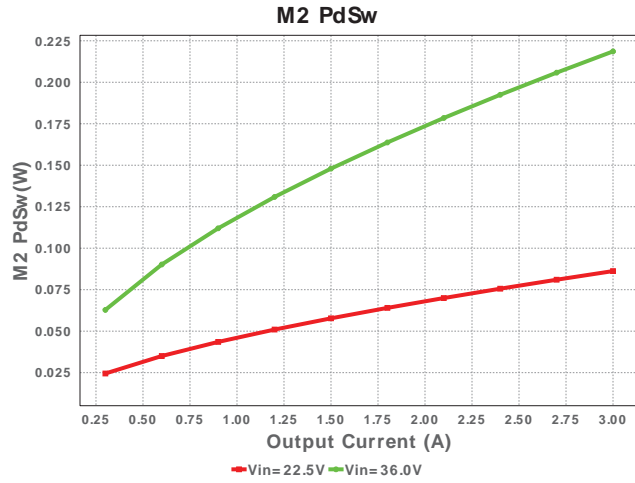


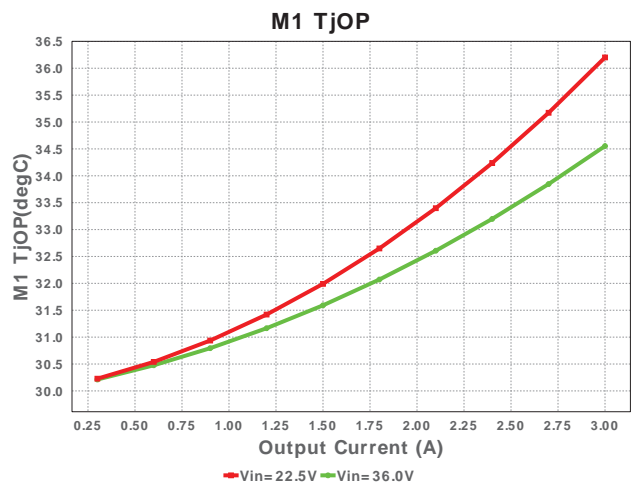
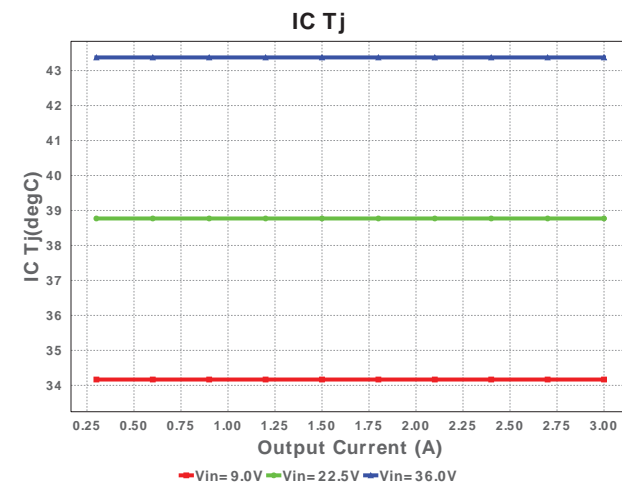
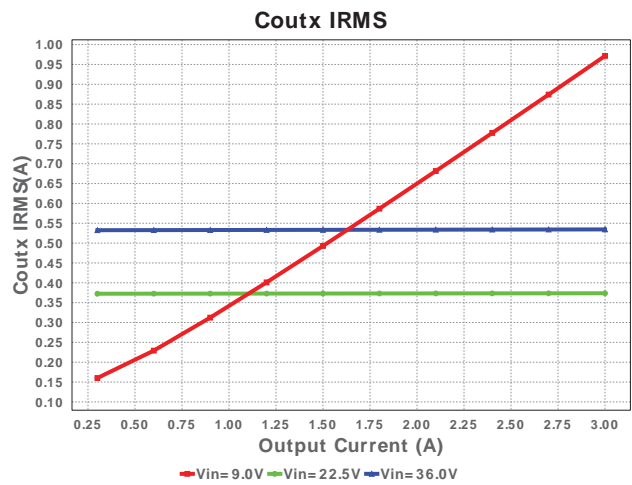
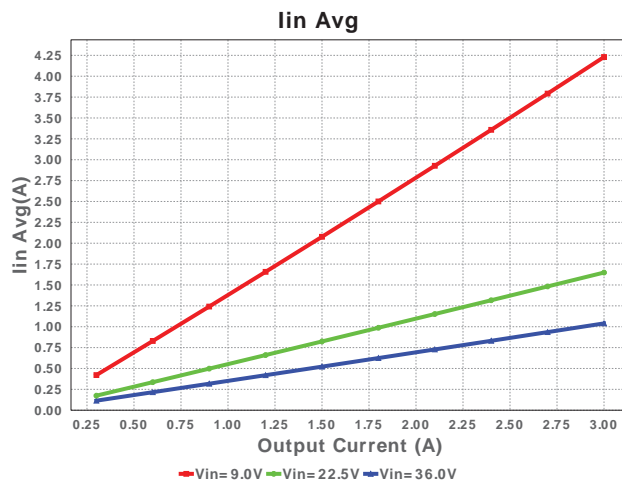
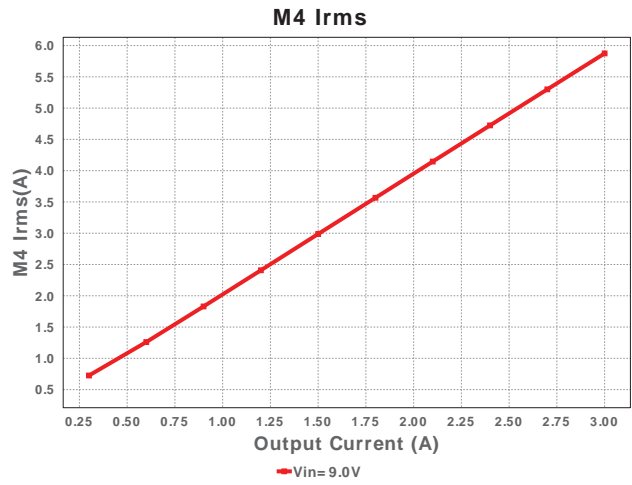
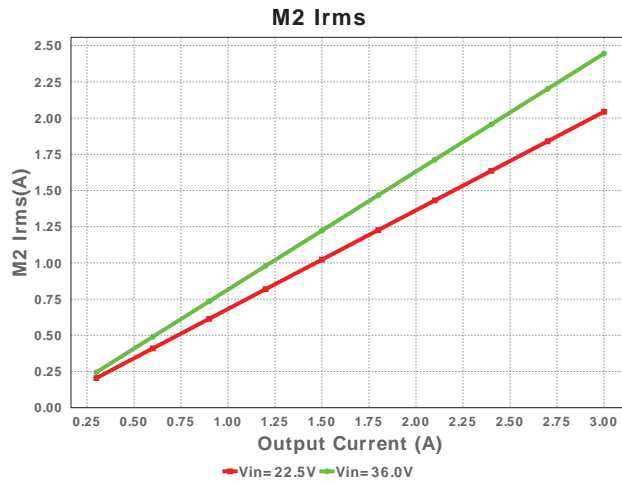


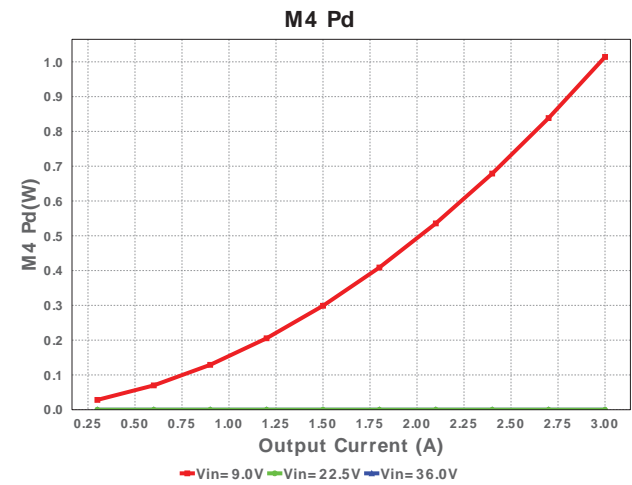
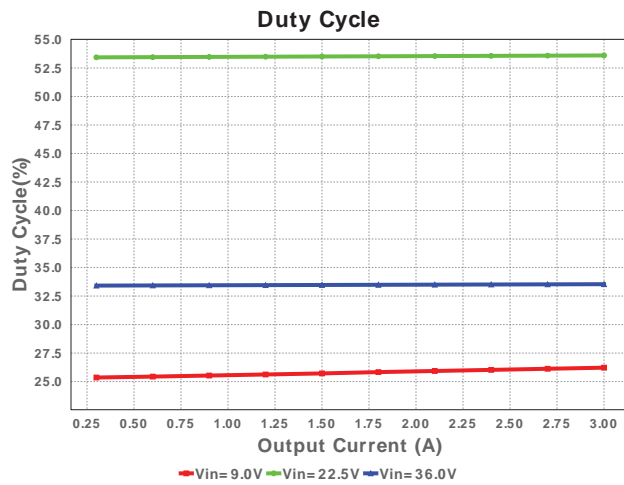
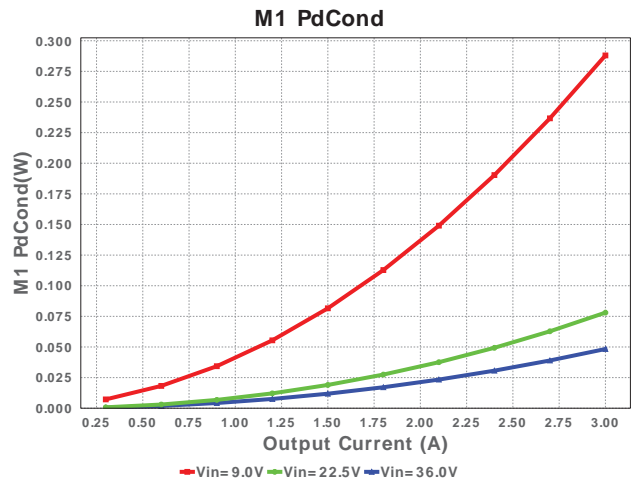
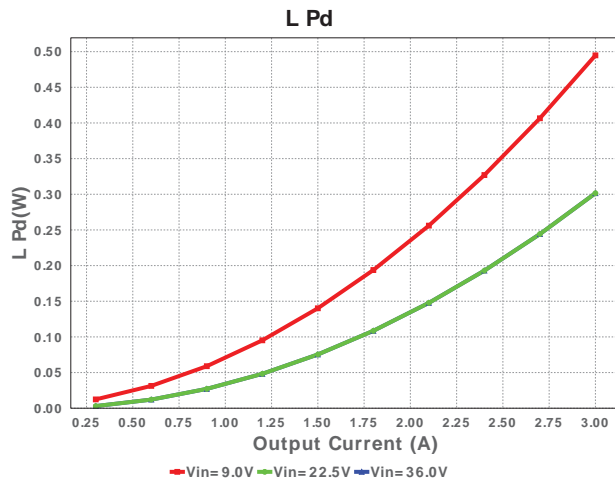
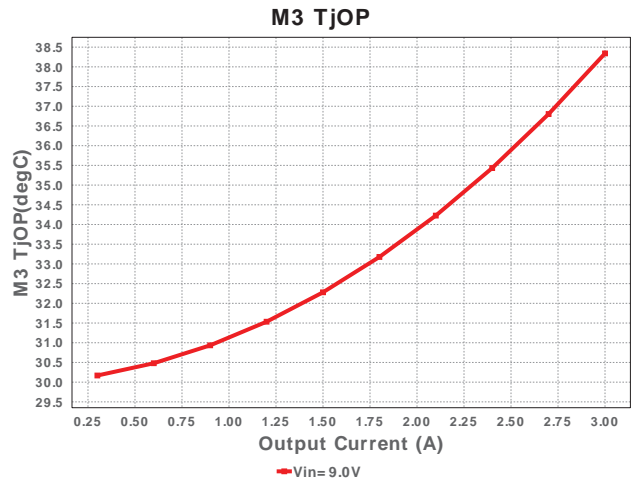
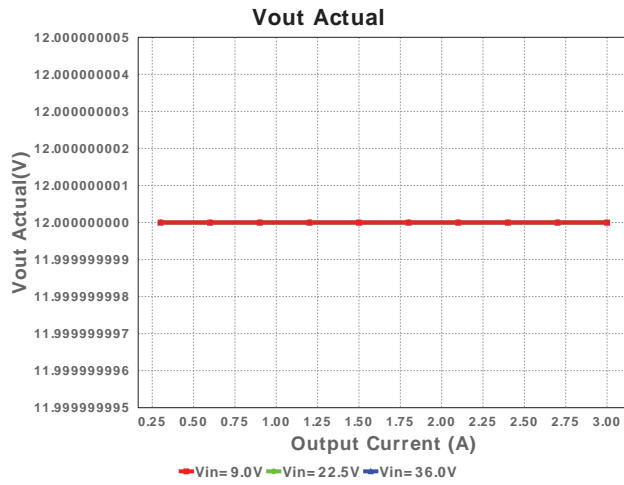


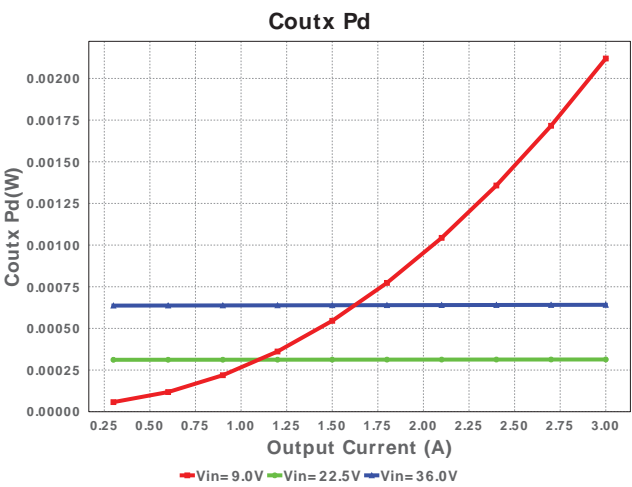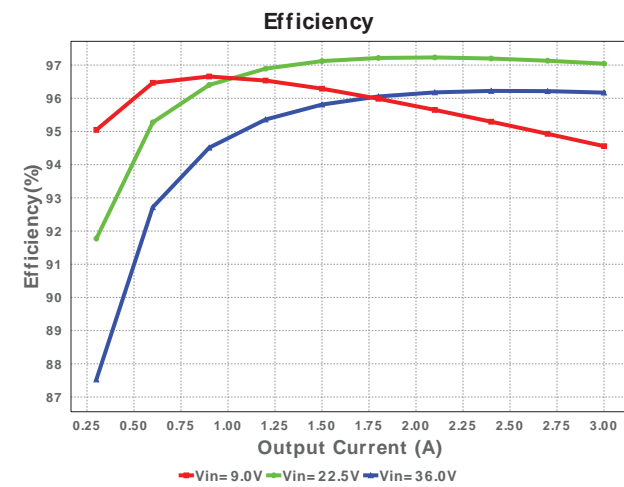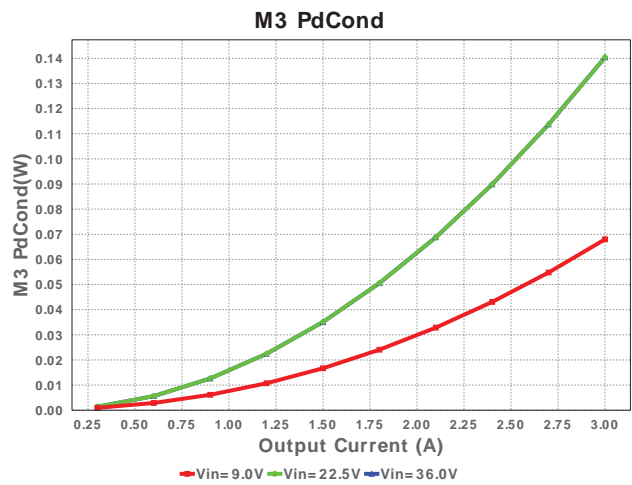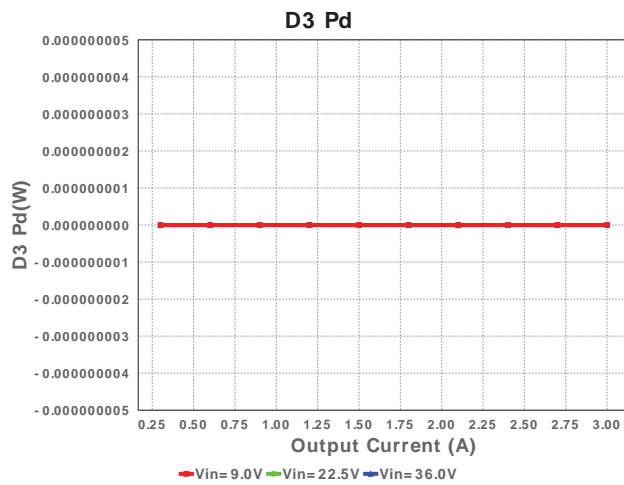
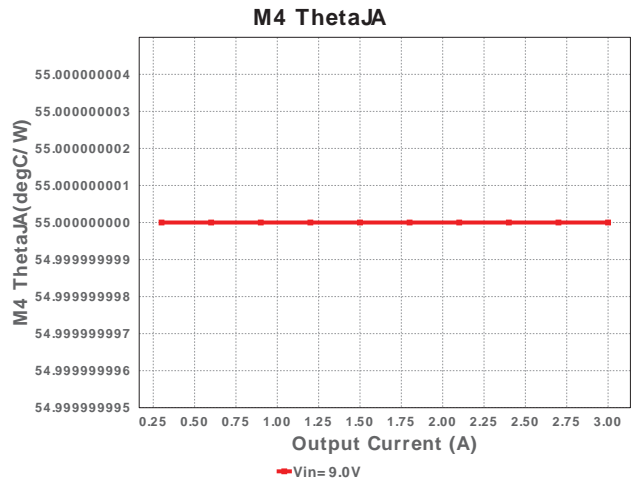
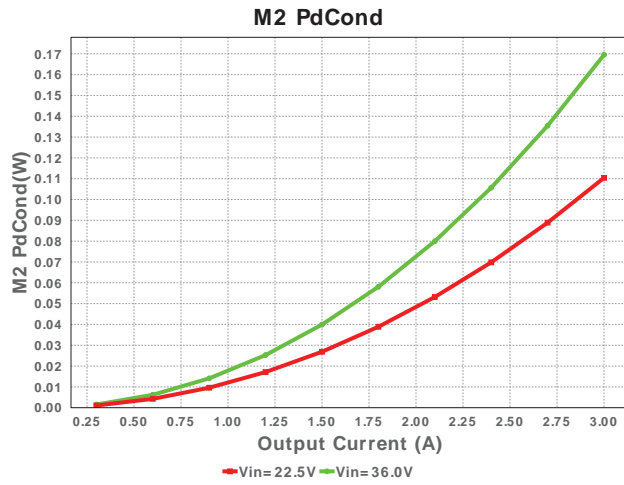




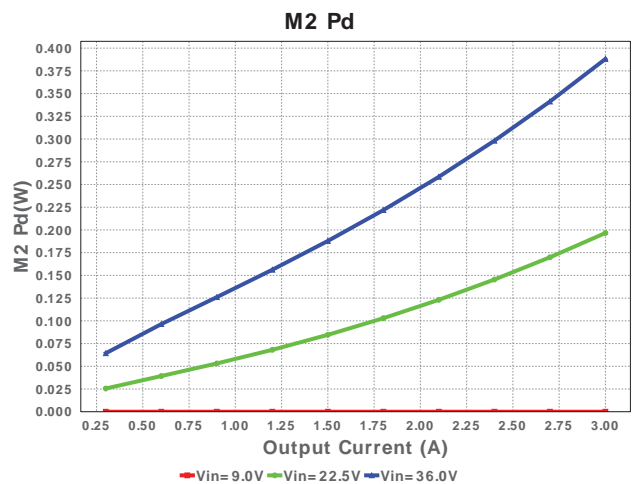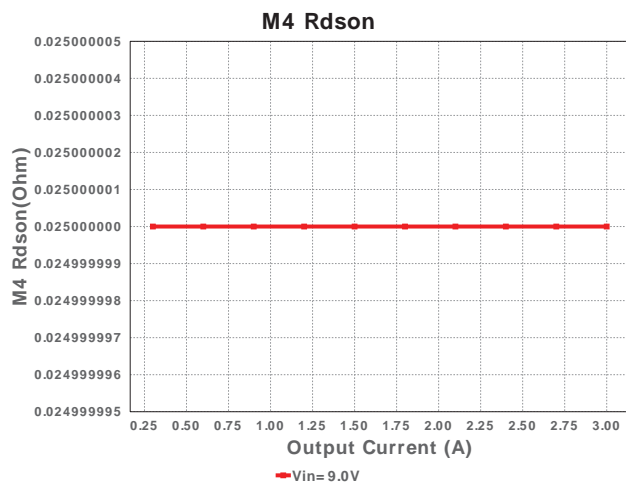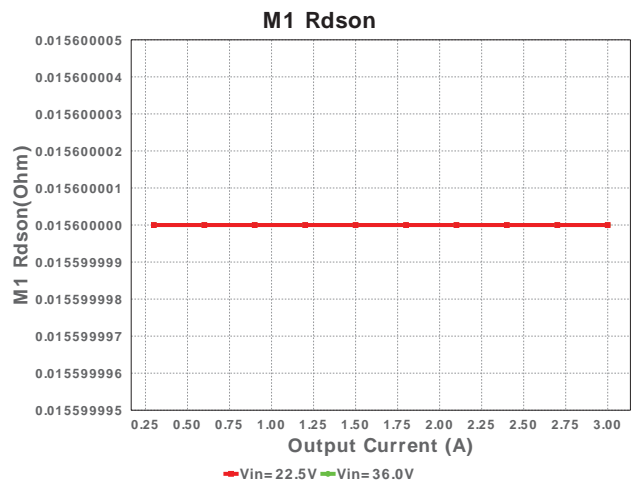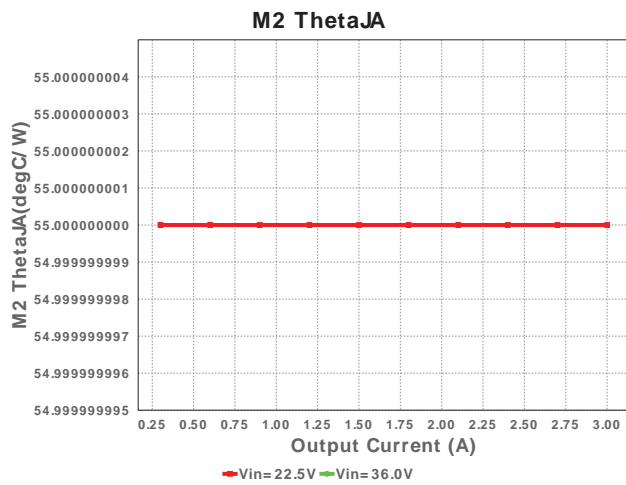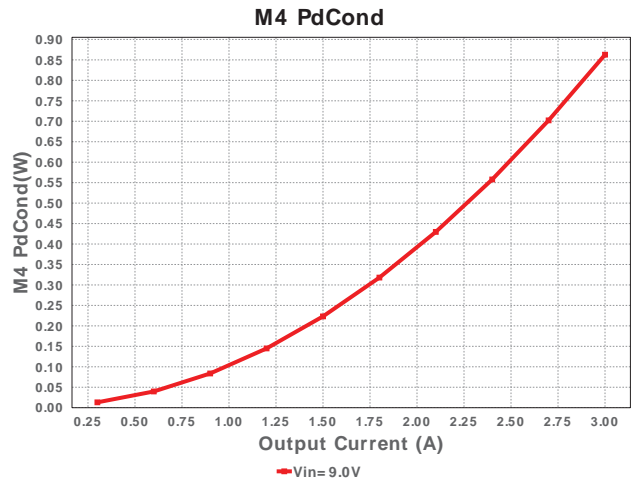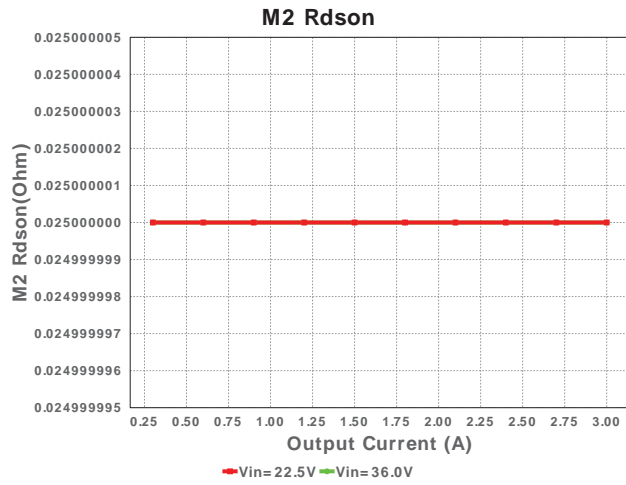

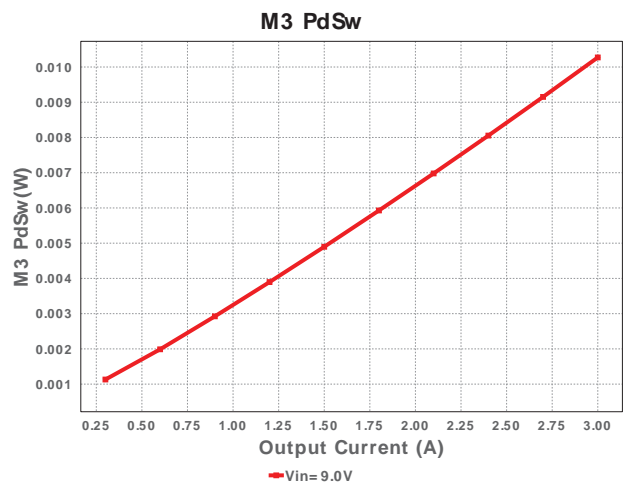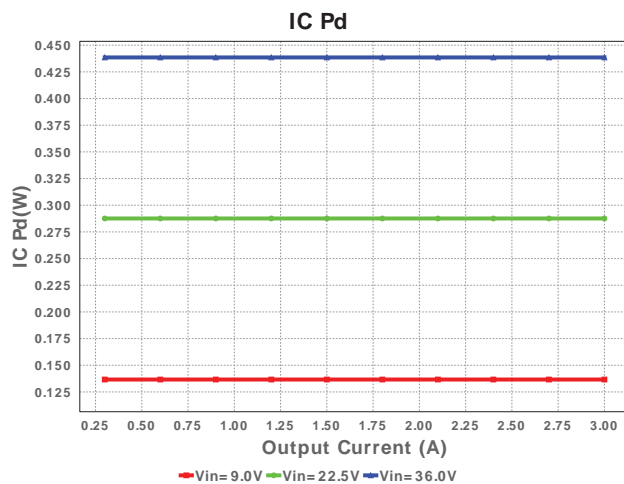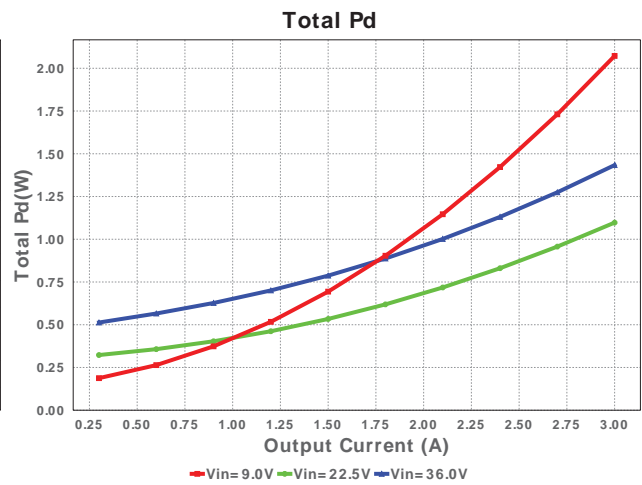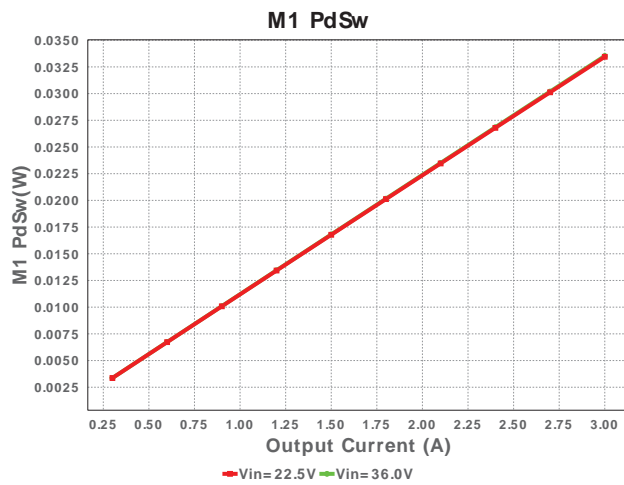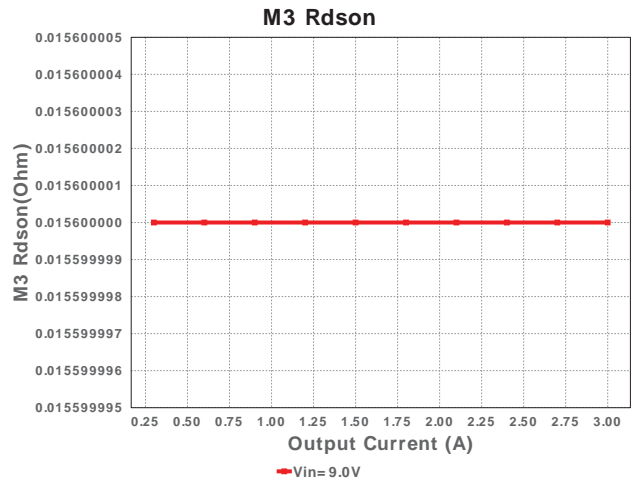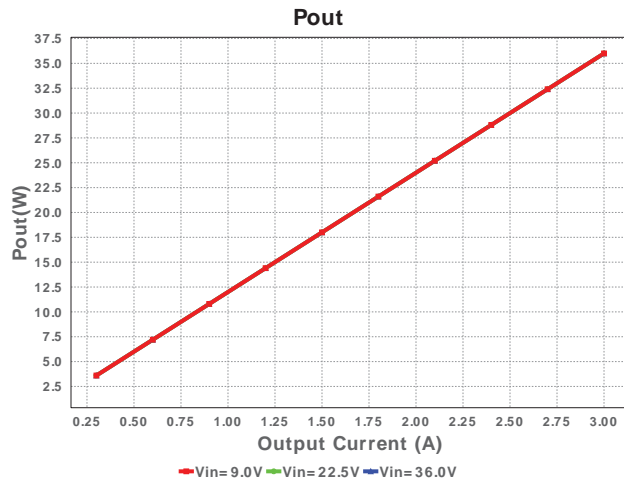

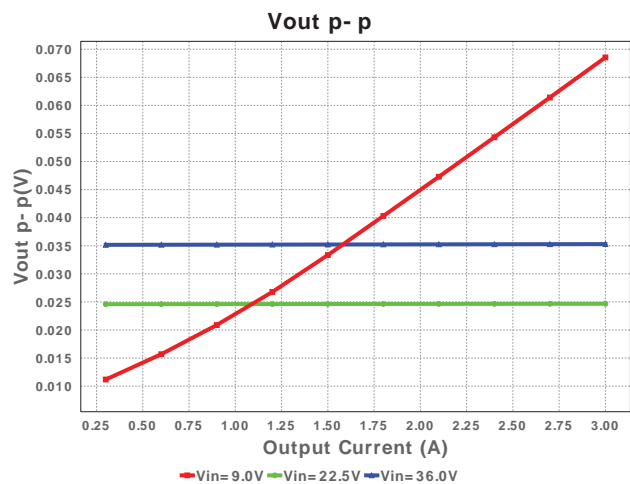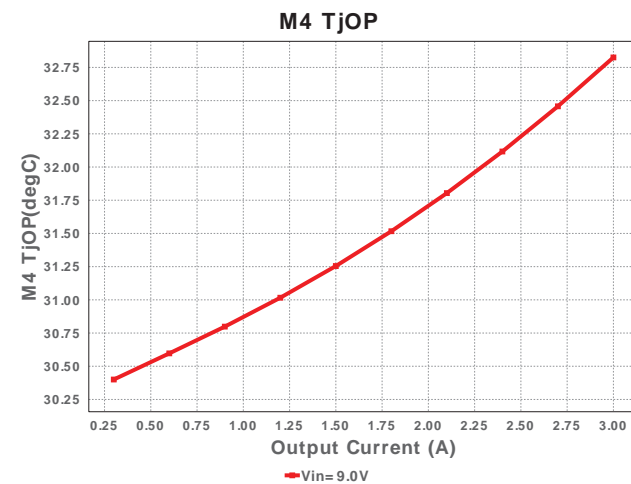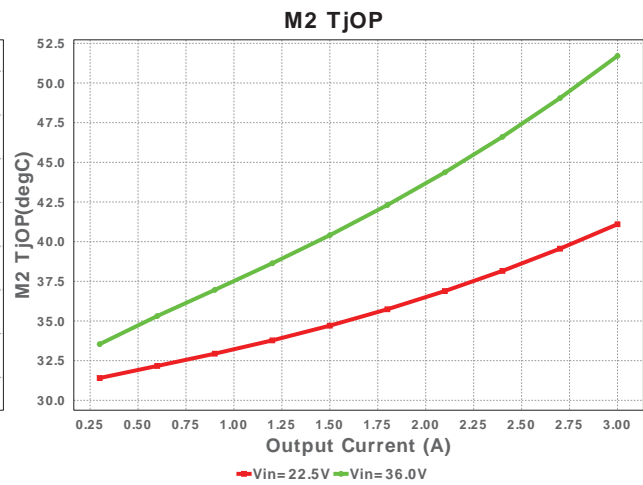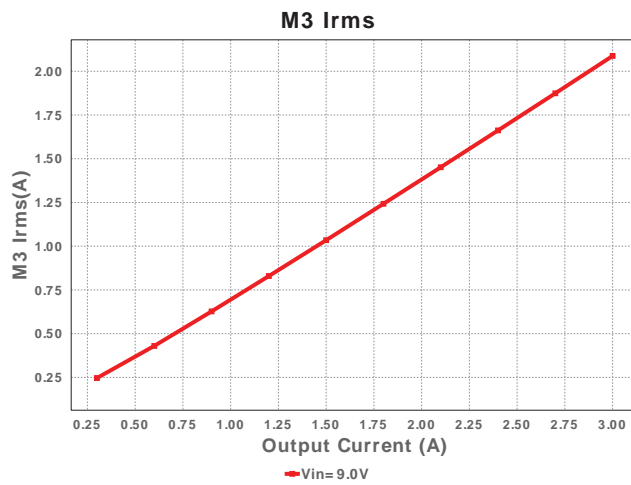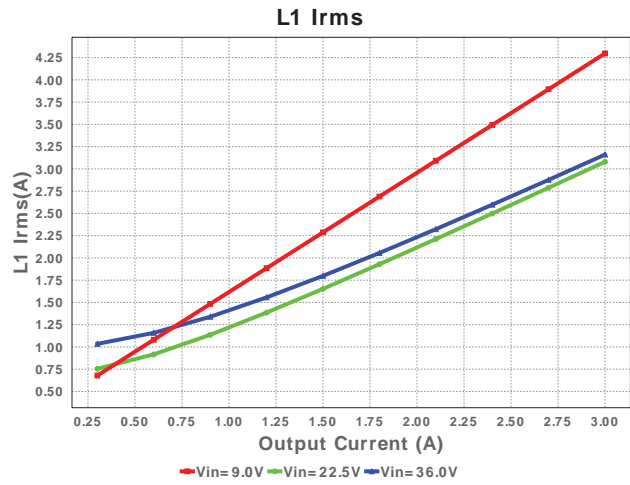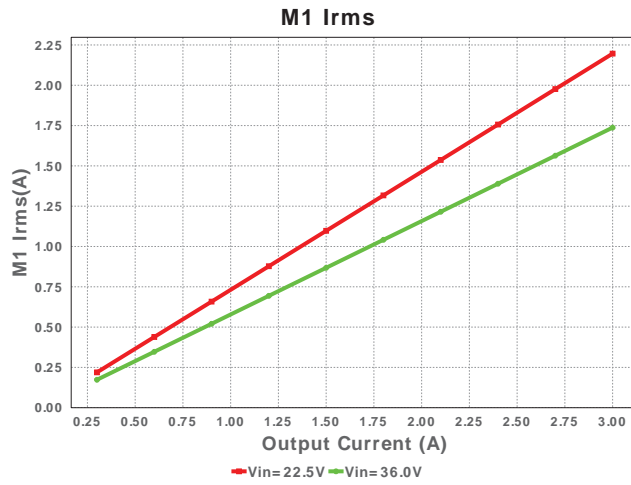

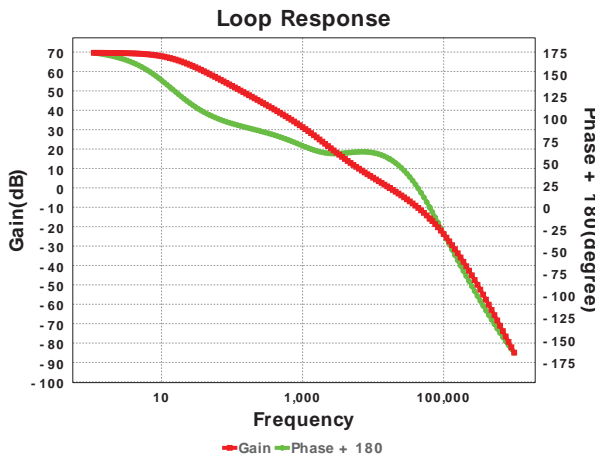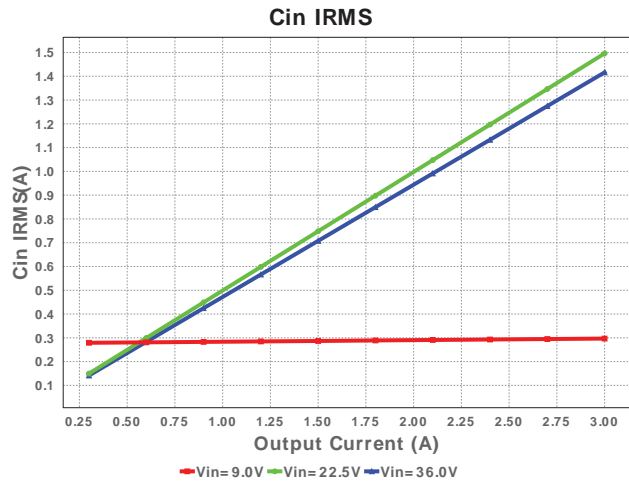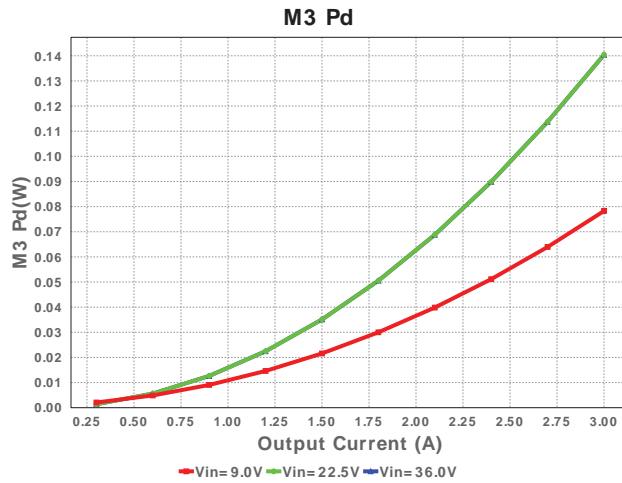

### Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	1.416 A	Current	Input capacitor RMS ripple current
2.	Cout IRMS	263.271 mA	Current	Output capacitor RMS ripple current
3.	Coutx IRMS	306.29 mA	Current	Output capacitor_x RMS ripple current
4.	Iin Avg	1.038 A	Current	Average input current
5.	L Ipp	1.973 A	Current	Peak-to-peak inductor ripple current
6.	L1 Irms	3.054 A	Current	Inductor ripple current
7.	M1 Irms	1.737 A	Current	MOSFET RMS ripple current
8.	M2 Irms	2.446 A	Current	MOSFET RMS ripple current
9.	SW Ipk	0.0 A	Current	Peak switch current
10.	BOM Count	39	General	Total Design BOM count
11.	FootPrint	658.0 mm <sup>2</sup>	General	Total Foot Print Area of BOM components
12.	Frequency	343.83 kHz	General	Switching frequency
13.	IC Tolerance	0.0 V	General	IC Feedback Tolerance
14.	M1 Rdson	15.6 mOhm	General	Drain-Source On-resistance
15.	M1 ThetaJA	55.0 degC/W	General	MOSFET junction-to-ambient thermal resistance
16.	M2 Rdson	25.0 mOhm	General	Drain-Source On-resistance
17.	M2 ThetaJA	55.0 degC/W	General	MOSFET junction-to-ambient thermal resistance
18.	Mode	CCM	General	Conduction Mode
19.	Pout	36.0 W	General	Total output power
20.	Total BOM	\$8.3	General	Total BOM Cost
21.	Low Freq Gain	69.617 dB	Op_Point	Gain at 10Hz
22.	Vout Actual	12.0 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
23.	Vout OP	12.0 V	Op_Point	Operational Output Voltage
24.	Cross Freq	17.138 kHz	Op_point	Bode plot crossover frequency
25.	Duty Cycle	33.541 %	Op_point	Duty cycle
26.	Efficiency	96.377 %	Op_point	Steady state efficiency
27.	Gain Marg	-15.97 dB	Op_point	Bode Plot Gain Margin
28.	IC Tj	43.375 degC	Op_point	IC junction temperature
29.	ICThetaJA	30.5 degC/W	Op_point	IC junction-to-ambient thermal resistance
30.	IOUT_OP	3.0 A	Op_point	Iout operating point
31.	M1 TjOP	35.643 degC	Op_point	MOSFET junction temperature

#	Name	Value	Category	Description
32.	M2 TjOP	46.179 degC	Op_point	MOSFET junction temperature
33.	Operating Topology	Buck	Op_point	The current operating topology of the device
34.	Phase Marg	55.599 deg	Op_point	Bode Plot Phase Margin
35.	VIN_OP	36.0 V	Op_point	Vin operating point
36.	Vout p-p	20.225 mV	Op_point	Peak-to-peak output ripple voltage
37.	Cin Pd	4.472 mW	Power	Input capacitor power dissipation
38.	Cout Pd	142.089 $\mu$ W	Power	Output capacitor power dissipation
39.	Coutx Pd	210.705 $\mu$ W	Power	Output capacitor_x power loss
40.	D2 Pd	0.0 W	Power	Diode power dissipation
41.	D3 Pd	0.0 W	Power	Diode power dissipation
42.	IC Pd	438.531 mW	Power	IC power dissipation
43.	L Pd	301.5 mW	Power	Inductor power dissipation
44.	M1 Pd	102.727 mW	Power	MOSFET power dissipation
45.	M1 PdCond	49.629 mW	Power	M1 MOSFET conduction losses
46.	M1 PdSw	53.098 mW	Power	M1 MOSFET switching losses
47.	M2 Pd	287.658 mW	Power	MOSFET power dissipation
48.	M2 PdCond	164.056 mW	Power	M2 MOSFET conduction losses
49.	M2 PdSw	123.603 mW	Power	M2 MOSFET switching losses
50.	M3 Pd	140.4 mW	Power	M3 MOSFET total power dissipation
51.	M3 PdCond	140.4 mW	Power	M3 MOSFET conduction losses
52.	M4 Pd	0.0 W	Power	M4 MOSFET total power dissipation
53.	Rsense Pd	77.757 mW	Power	LED Current Rsns Power Dissipation
54.	Total Pd	1.353 W	Power	Total Power Dissipation
55.	Vout Tolerance	1.886 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

## Design Inputs

#	Name	Value	Description
1.	Iout	3.0	Maximum Output Current
2.	VinMax	36.0	Maximum input voltage
3.	VinMin	9.0	Minimum input voltage
4.	Vout	12.0	Output Voltage
5.	base_pn	LM5175	Base Product Number
6.	source	DC	Input Source Type
7.	Ta	30.0	Ambient temperature

## Design Assistance

1. Tip: Snubbers and/or gate resistors may be required to limit the SW1,2 node switching spikes below the IC and FET abs max ratings.
2. Tip: Slope Capacitor: smaller slope capacitors provide better transition region behavior.
3. **LM5175** Product Folder : <http://www.ti.com/product/LM5175> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

**You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.**

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).