
## How to save the flash memory contents of a TMS320LF240xA device using CCS3.3

- Connect to the device with CCSv3.3. If the device is secured with passwords, unlock the device first.
- Click File  $\rightarrow$  Data  $\rightarrow$  Save

VIZE335 XD5310058 Emulator/	cpu_0 - TM5320C284	a - Code Compos	er Studio						0 0	100
File Edit View Project Deb	sug GEL Option	Profile Tools		Window	and the second second					
New		1	• R	A 14	54 <b>5</b> 4 1.	a K?	1414	山口口	五 4	2.3
Open Class	Cel+0	] @ # #	≚ e⊧	8 8	4					
See	Col+5									
Seve Ar Seve Al		embly (cleat - 0x	um 12			0+300000				
Load Program Reboad Program Load Symbols Reload Symbols Unload Symbols Load GEL	Chi+L Chi+Shift+L	F9CE 28AD0 F9D0 561F F9D1 5616 F9D2 561A F9D3 2940 F9D4 761F0 F9D6 2902 F9D7 FF69 F9D8 767FF	006 ) 5 000 ) 674 I	40V SETC SETC SETC SETC SETC SETC SETC SETC		Ext0300000 0x00300003 0x00300005 0x00300005 0x00300005 0x00300012 0x00300012 0x00300018 0x00300018	Satti Satti Satti Satti Satti Satti Satti Satti Satti Satti Satti Satti Satti Satti Satti Satti Satti Satti Satti	Cattry Cattry Cattry Cattry Cattry Cattry Cattry Cattry Cattry Cattry	Laffff Laffff Laffff Laffff Laffff Laffff Laffff Laffff Laffff	1.1
Data Workspace	:	Load			•	0x0030001E 0x00300021	LAFTIT LATTIT	CaTTEF CaFTEF	GalTTT GalTTT	
Ofference between files Merge Files						0x0030002+ 0x00300027 0x0030002A	DATTTT DATTTT DATTTT TEBr. +	Carrer Carrer Data 7	Latre Latre	
Post_	Col+P	-						Const Const I	-	-
Recent Source Files Recent Workspaces Recent Program Files Recent Symbols		Debug only se. HEL->Watch		ister	0.					
Recent GEL Files									•	1
Launch Setup					Store dat	in memory to f	le :			

- After clicking "Save" it will ask you for the file destination name and file extension format you want to save (COFF, HEX, DAT). To reprogram another device using the saved flash content, a COFF file (xxxxx.out) is the easiest to handle.
- After setting the destination path, it will prompt you about the Flash starting address and the size of the array. Refer to the datasheet for this information for your part number. Click okay and you are done.

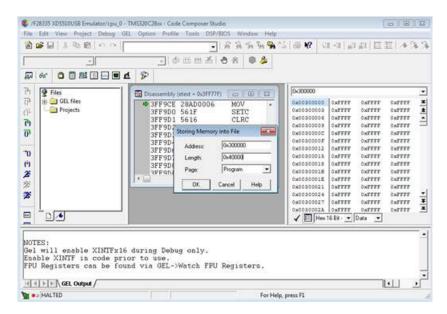

How to program flash memory of a TMS320LF240xA device using the saved file

• The flash plugin in CCS can be used to program the saved COFF file into another device.