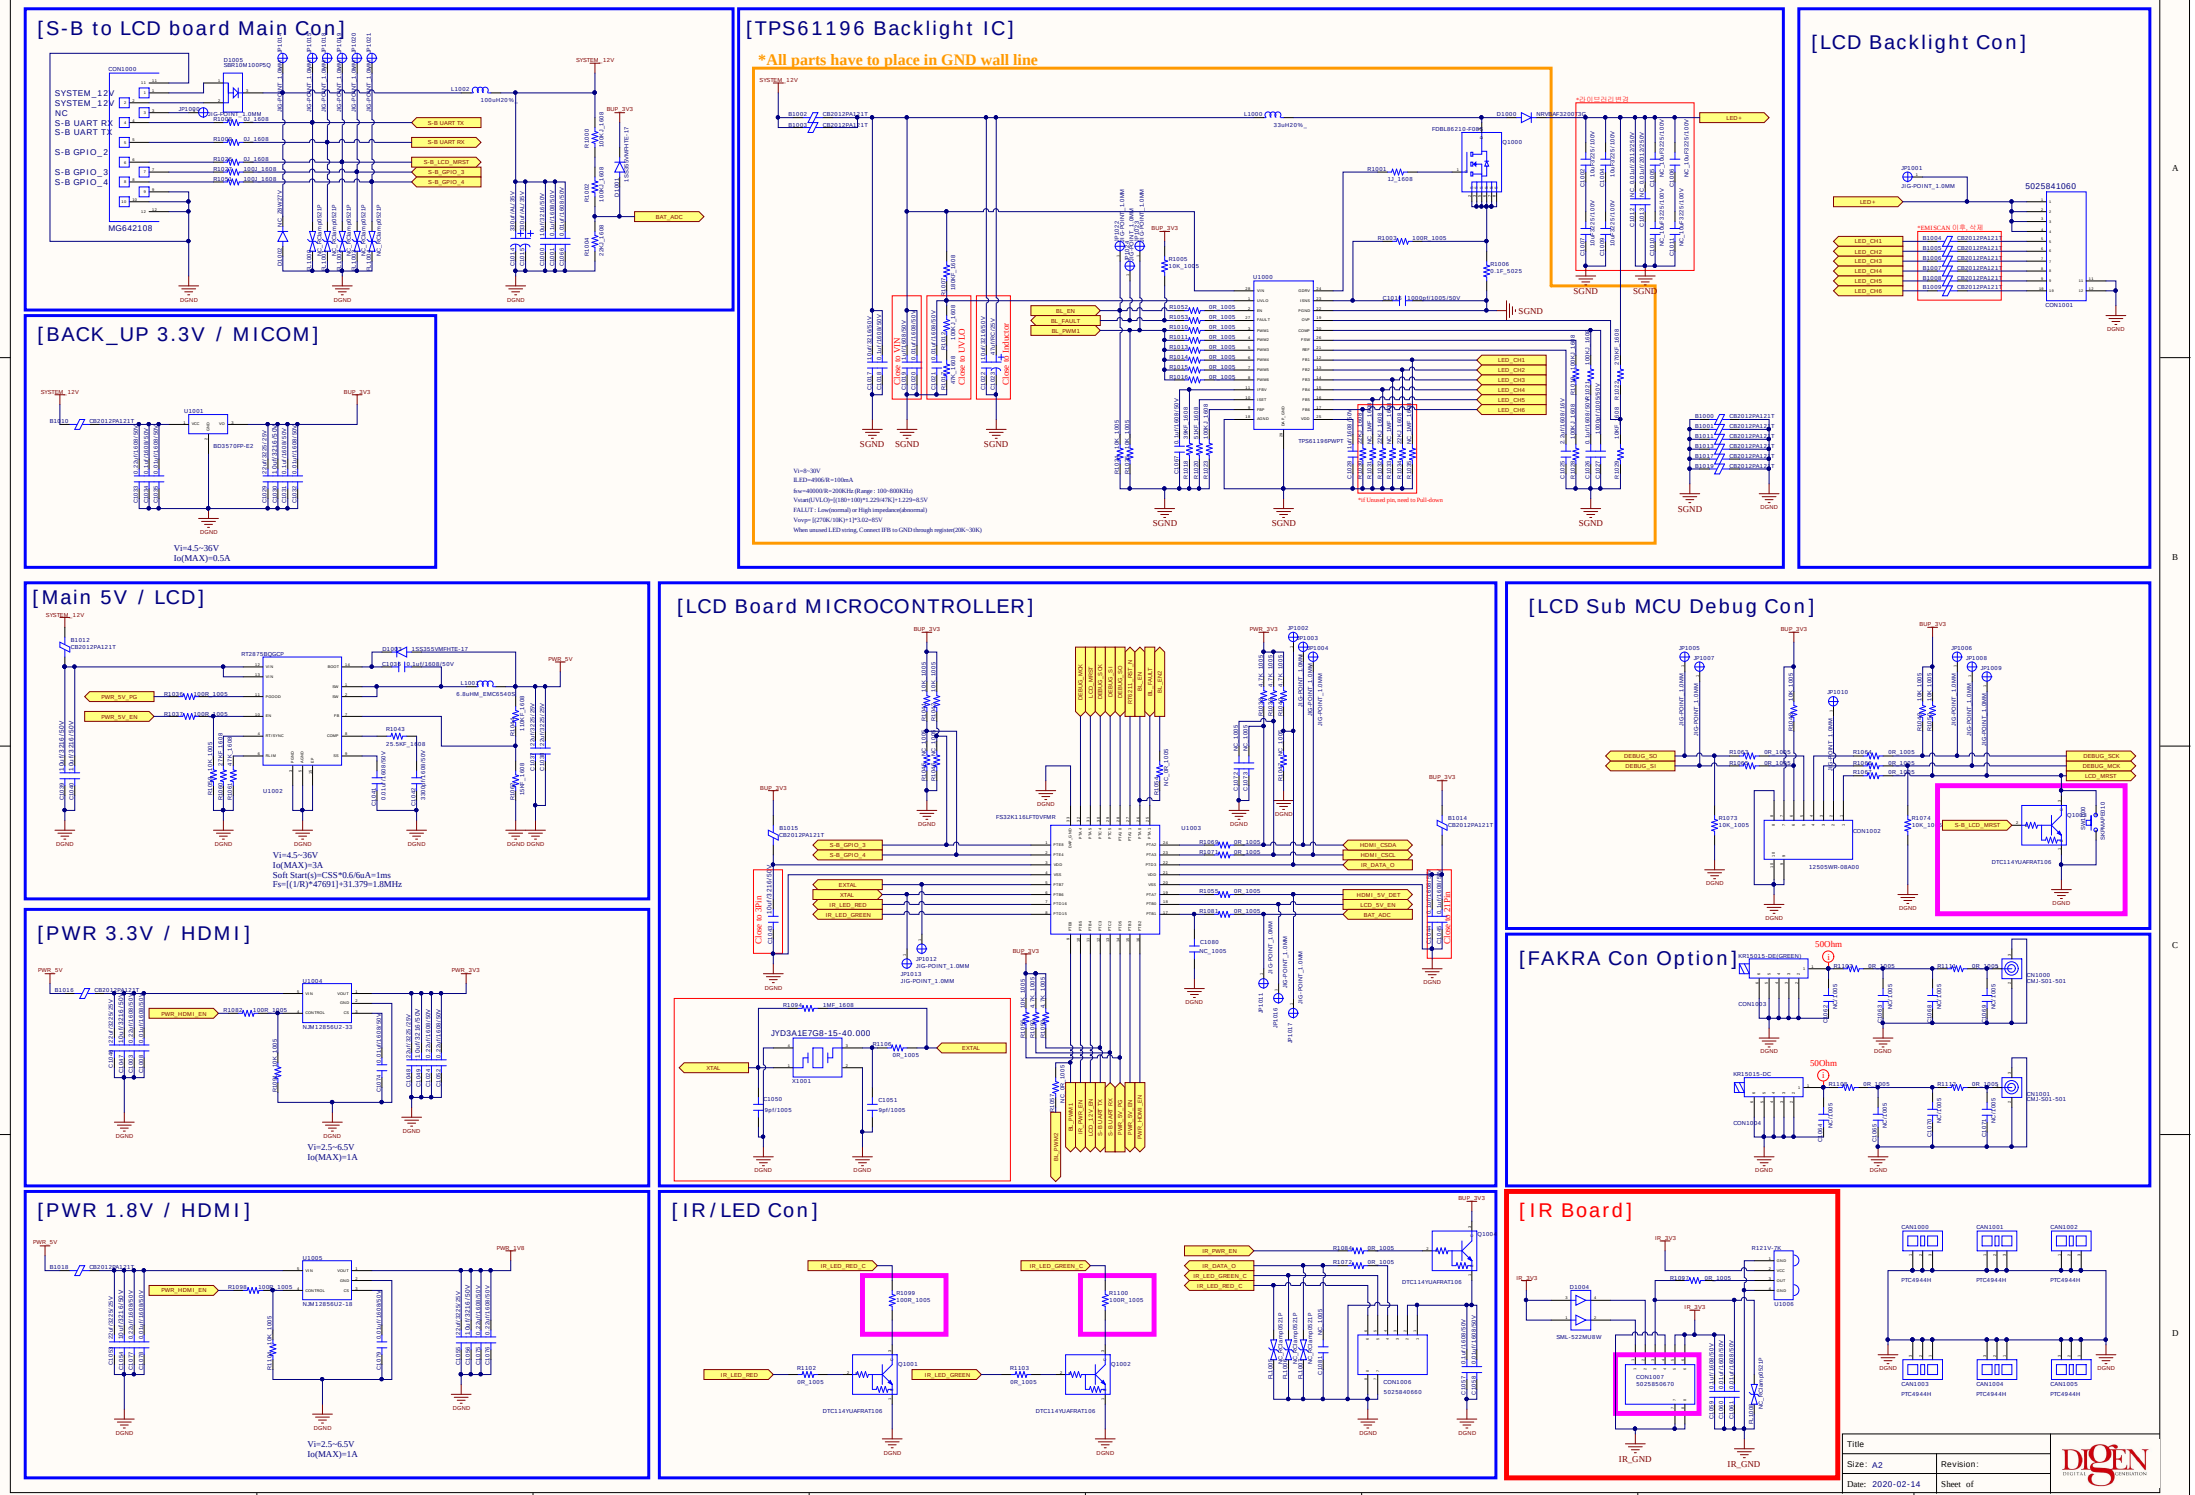
[S-B to LCD board Main Con]
[TPS61196 Backlight IC]
*All parts have to place in GND wall line
[LCD Backlight Con]
[BACK_UP 3.3V / MICOM]
Vi=4.5~36V
Io(MAX)=0.5A
[Main 5V / LCD]
Vi=4.5~36V
Io(MAX)=3A
[LCD Board MICROCONTROLLER]
[LCD Sub MCU Debug Con]
[PWR 3.3V / HDMI]
Vi=2.5~6.5V
Io(MAX)=1A
[FAKRA Con Option]
[PWR 1.8V / HDMI]
Vi=2.5~6.5V
Io(MAX)=1A
[IR/LED Con]
[IR Board]
Title
Size: A2
Revision:
Date: 2020-02-14
Sheet of
DIGEN