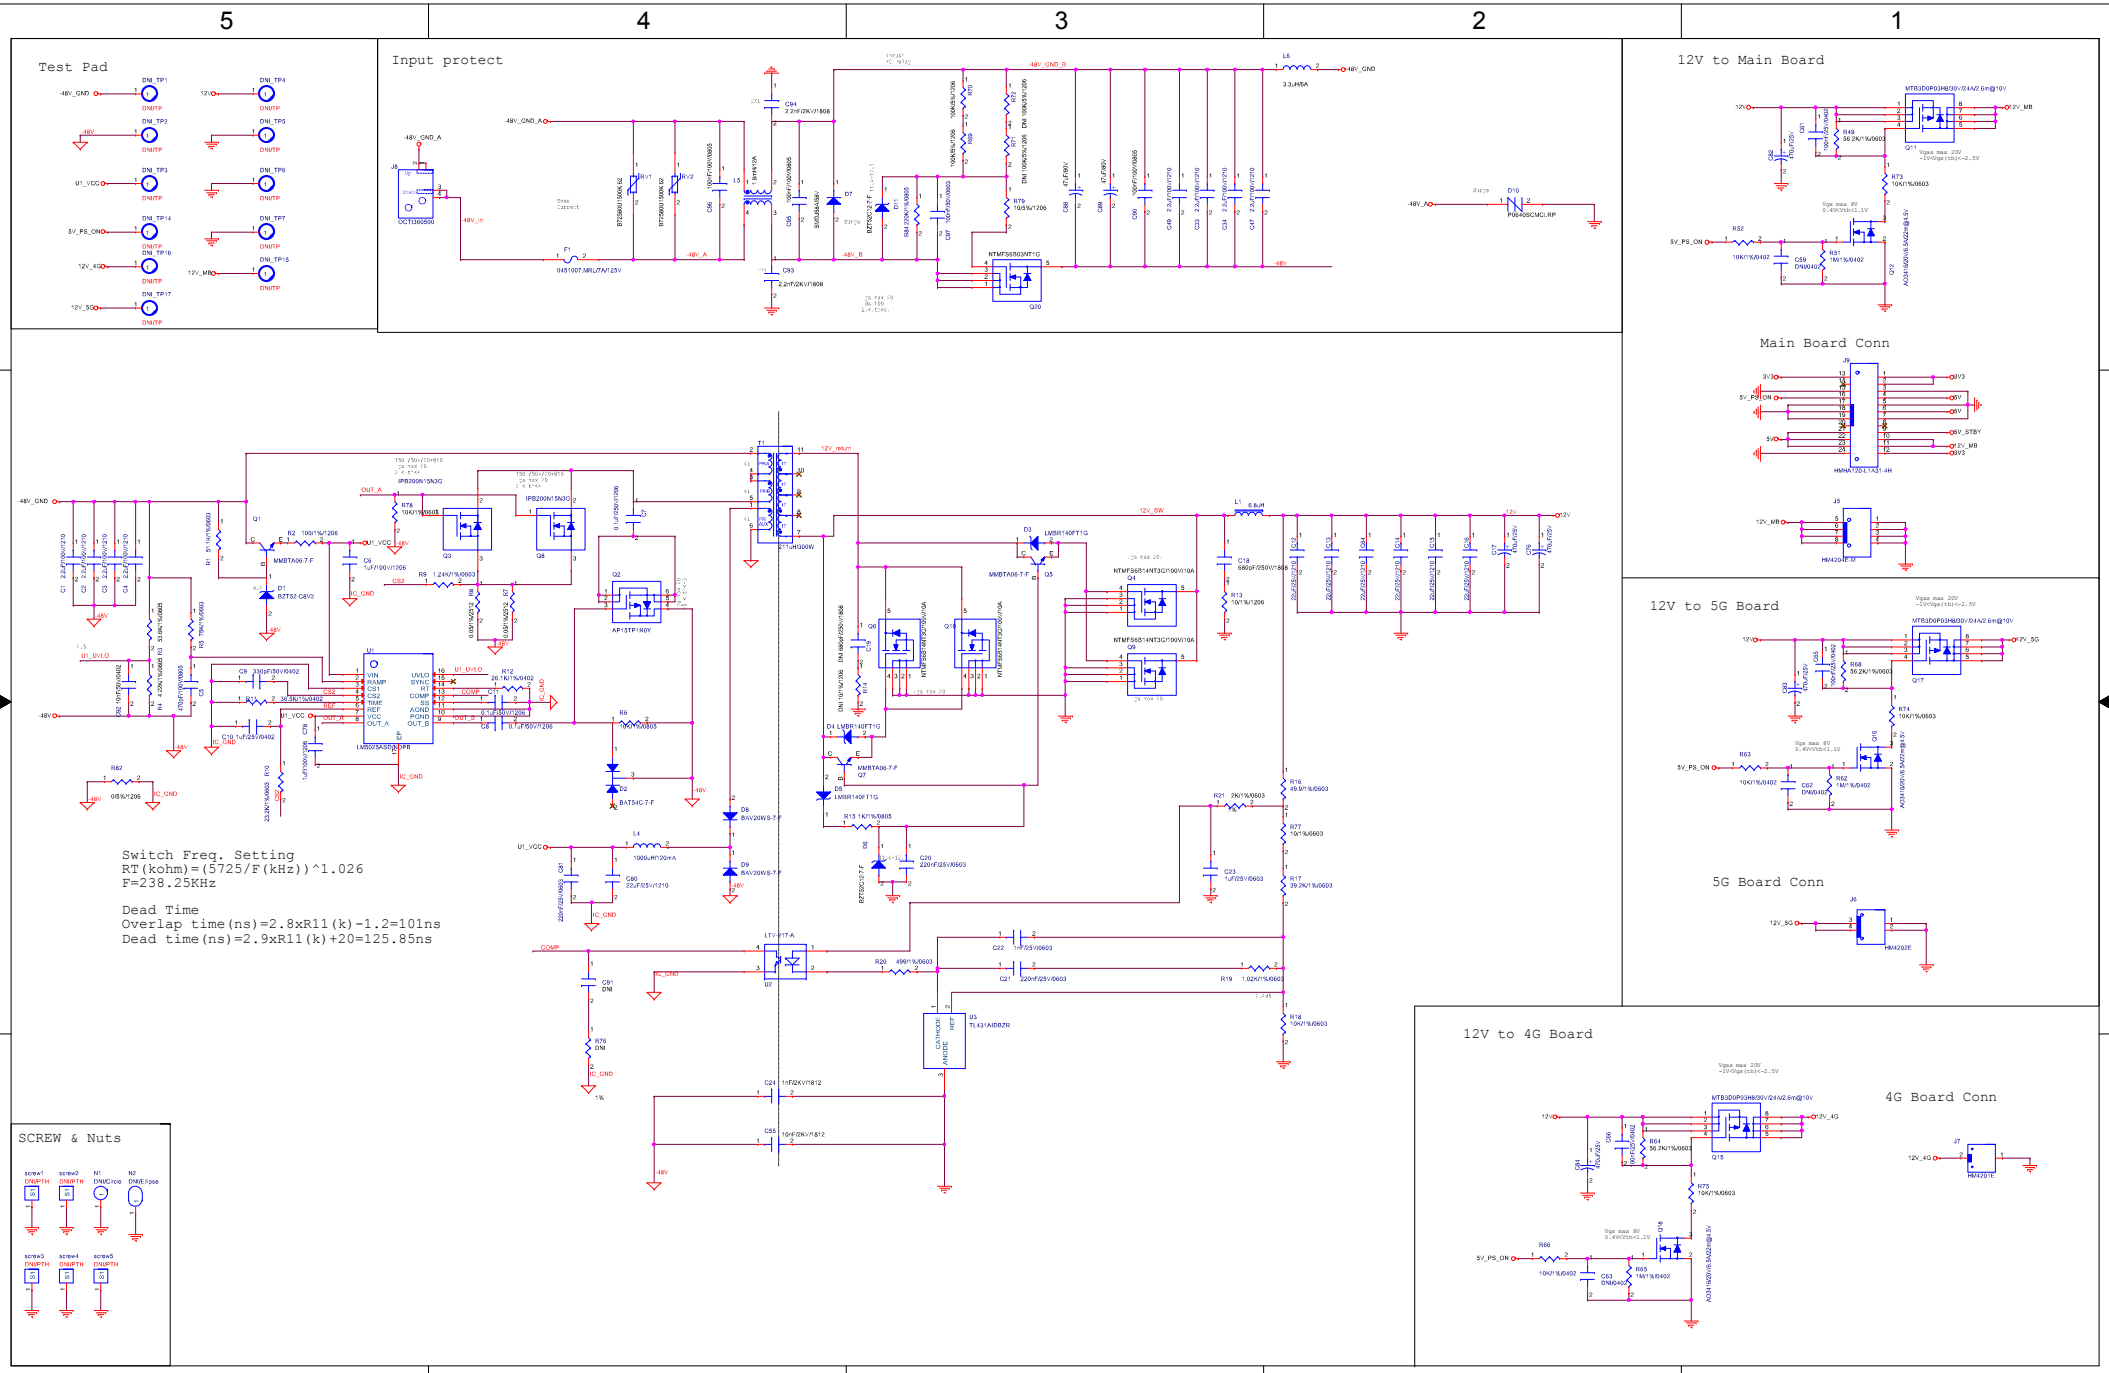
Test Pad
Input protect
12V to Main Board
Main Board Conn
12V to 5G Board
5G Board Conn
12V to 4G Board
4G Board Conn
SCREW & Nuts
Switch Freq. Setting
RT(kohm)=(5725/F(kHz))^1.026
F=238.25KHz
Dead Time
Overlap time(ns)=2.8xR11(k)-1.2=101ns
Dead time(ns)=2.9xR11(k)+20=125.85ns