


SS52 THRU SS510

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current - 5.0 Amperes

DO-214AB

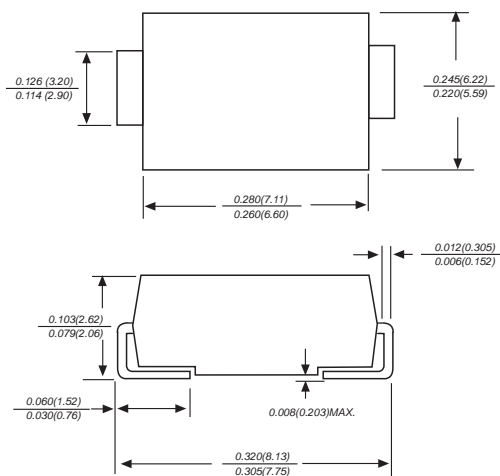

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic body
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.007 ounce, 0.25grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


| | SYMBOLS | SS52 | SS53 | SS54 | SS55 | SS56 | SS58 | SS510 | UNITS |
|---|-----------------|-------------|------|------|------|------|-------------|-------|-------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 20 | 30 | 40 | 50 | 60 | 80 | 100 | VOLTS |
| Maximum RMS voltage | V_{RMS} | 14 | 21 | 28 | 35 | 42 | 56 | 70 | VOLTS |
| Maximum DC blocking voltage | V_{DC} | 20 | 30 | 40 | 50 | 60 | 80 | 100 | VOLTS |
| Maximum average forward rectified current at T_L (see fig. 1) | $I_{(AV)}$ | 5.0 | | | | | | | Amps |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | 150.0 | | | | | | | Amps |
| Maximum instantaneous forward voltage at 5.0A | V_F | 0.55 | | 0.70 | | 0.85 | | Volts | |
| Maximum DC reverse current at rated DC blocking voltage | I_R | 0.5 | | | | | | | mA |
| $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$ | | 20 | | | | 10 | | | |
| Typical junction capacitance (NOTE 1) | C_J | 200 | | | | | | | pF |
| Typical thermal resistance (NOTE 2) | $R_{\theta JA}$ | 50.0 | | | | | | | °C/W |
| Operating junction temperature range | T_J | -65 to +125 | | | | | -65 to +150 | | °C |
| Storage temperature range | T_{STG} | -65 to +150 | | | | | | | °C |

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES SS52 THRU SS510

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

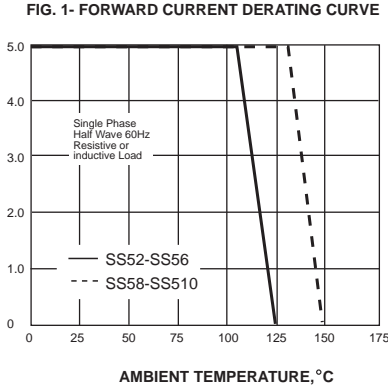

PEAK FORWARD SURGE CURRENT,
AMPERES

