


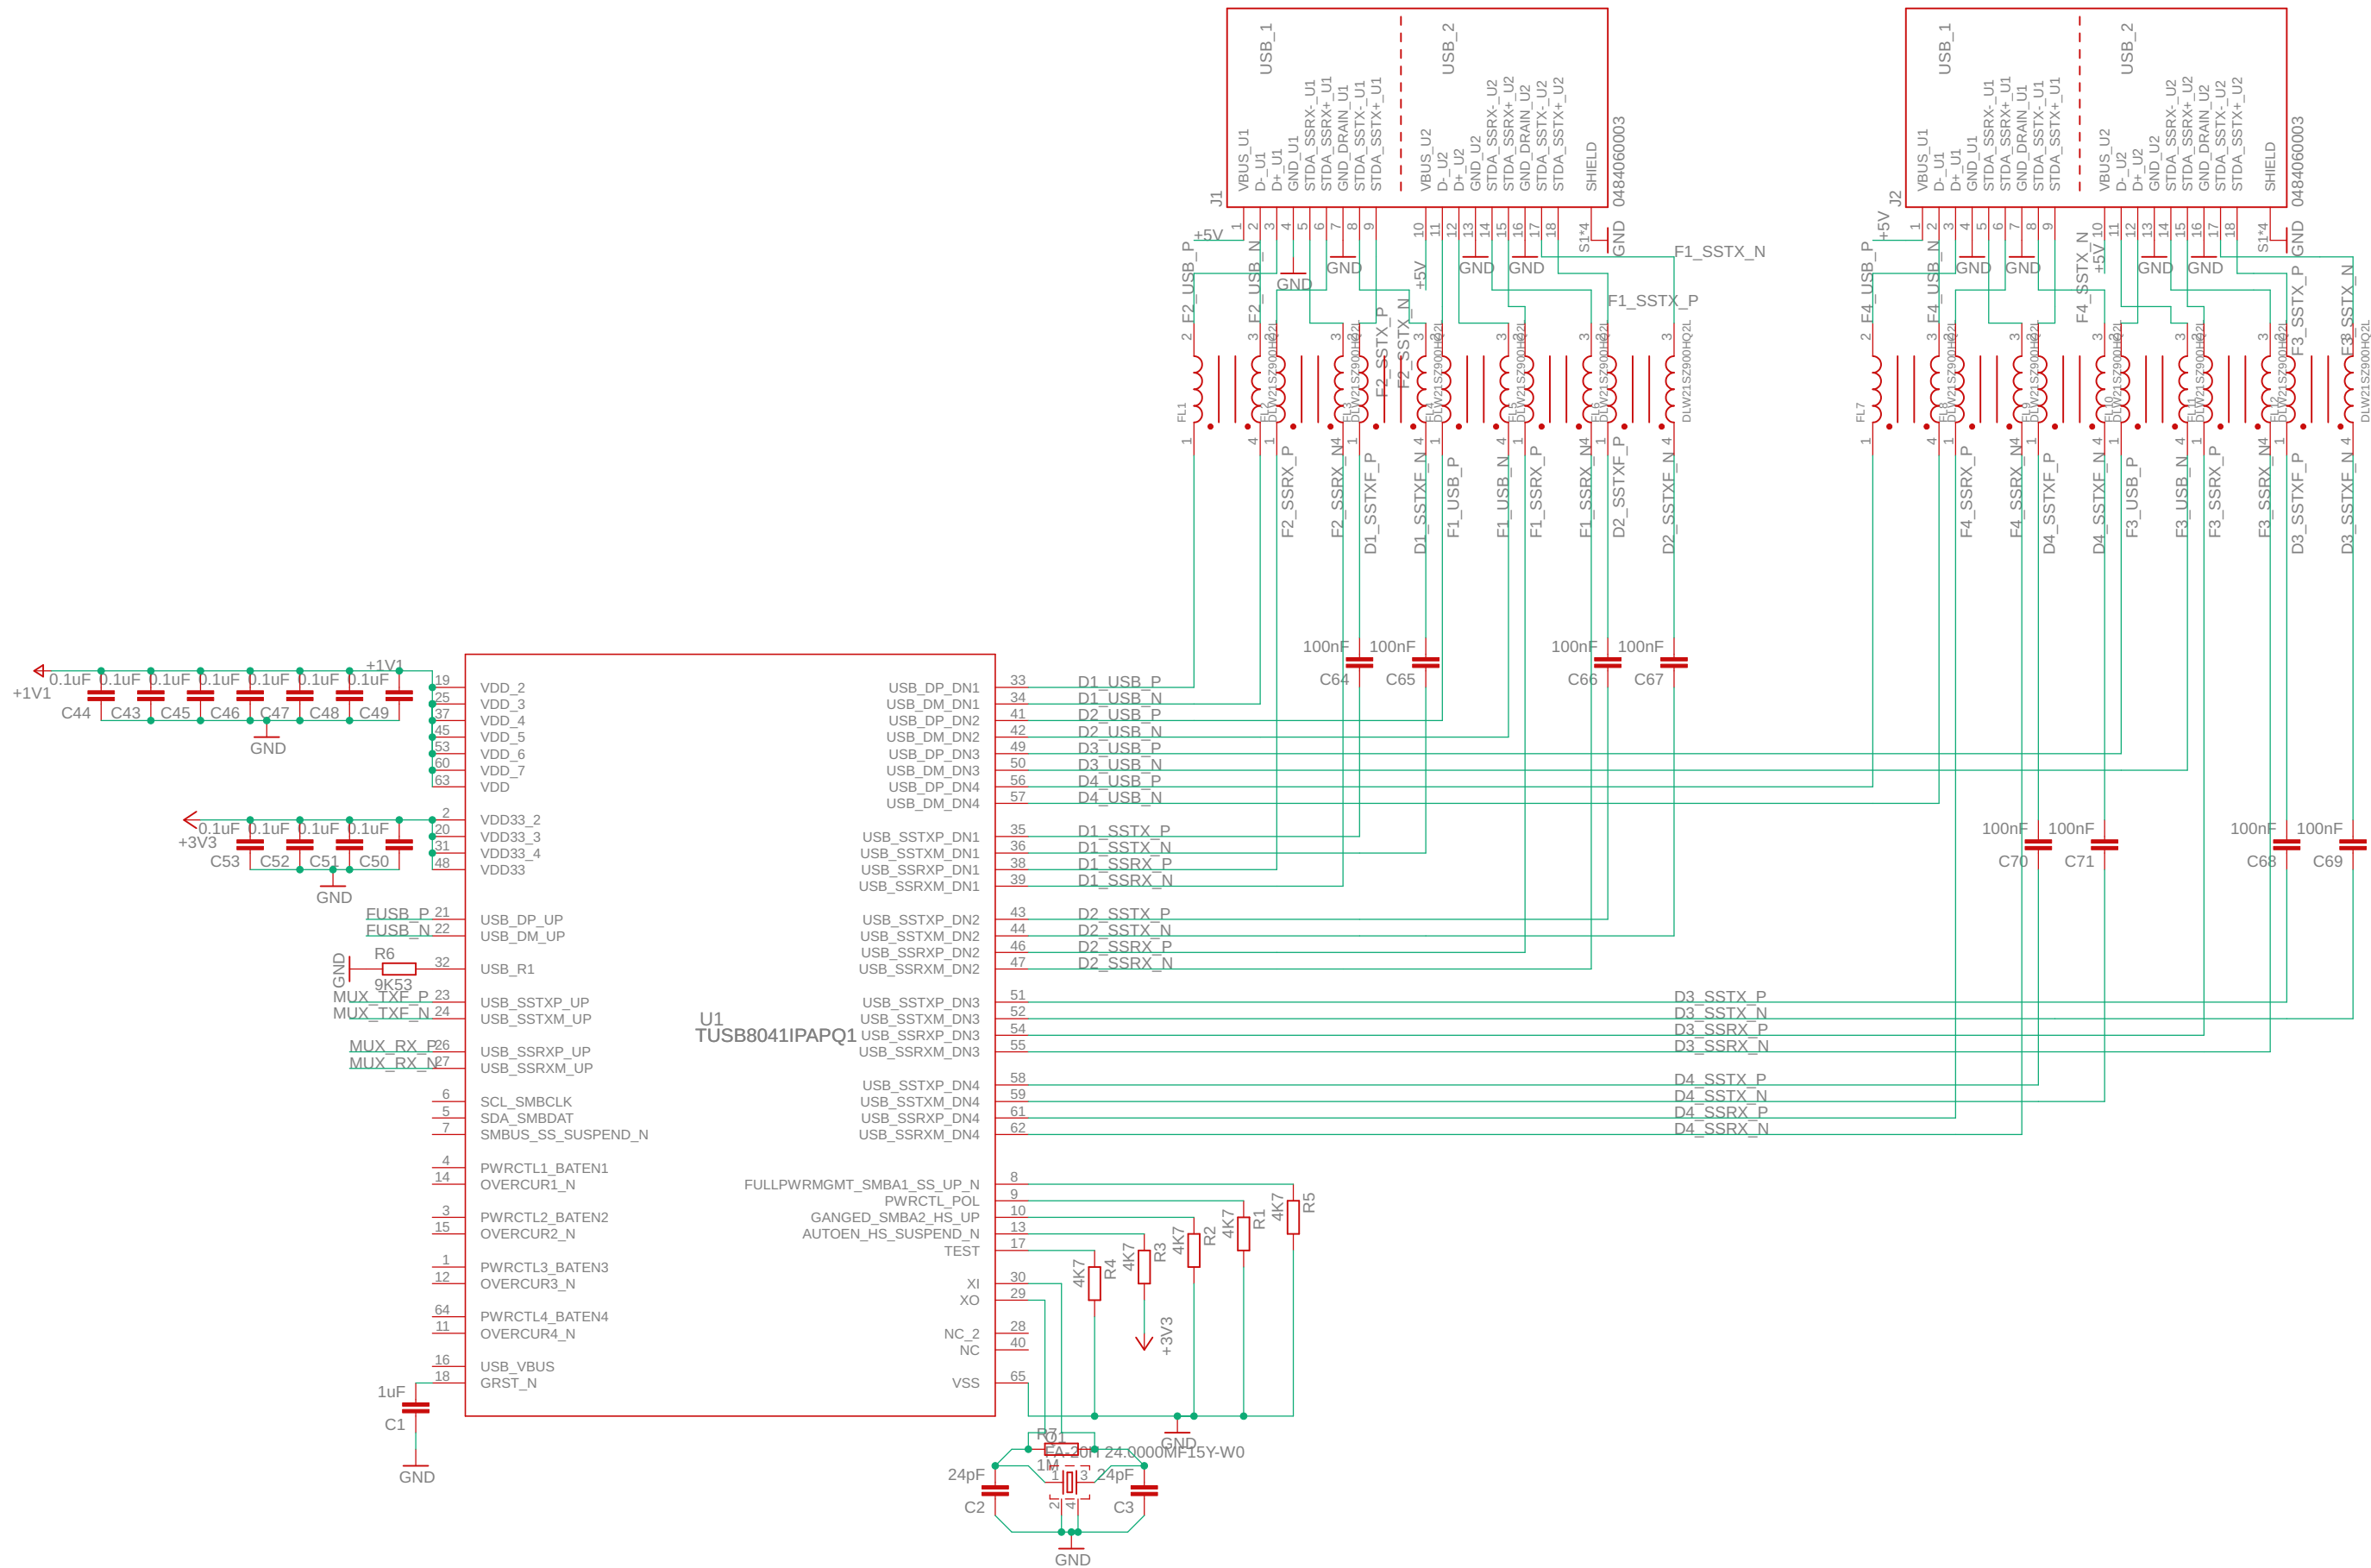
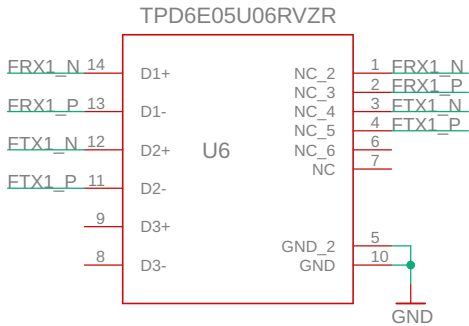


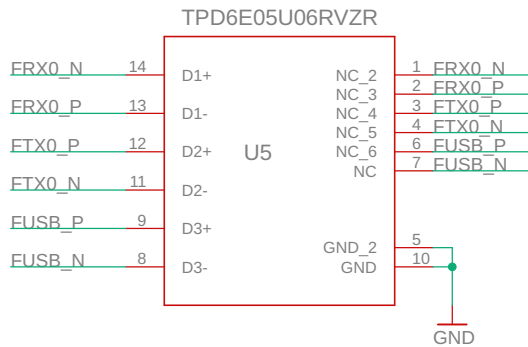

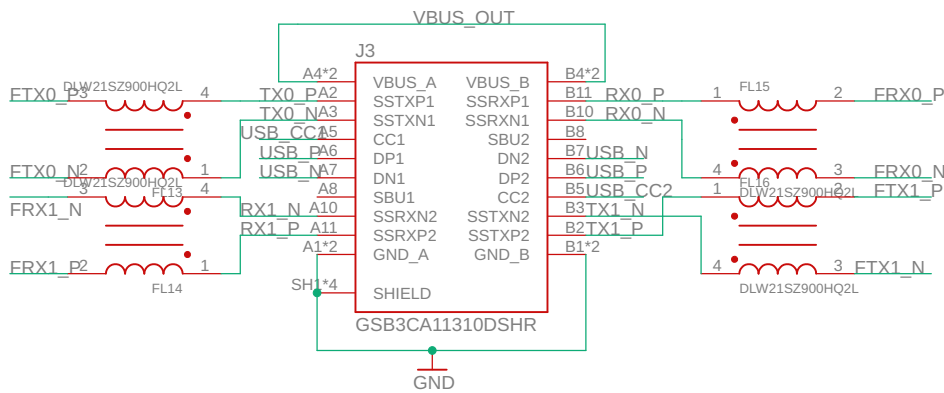

Swapping SS differential pairs is allowed in the USB 3.0 specificatoin and higher. This allows for better routing.
The TUSB8041 allows swapping of the 2.0 datalines as well, but it does require a register change.

