


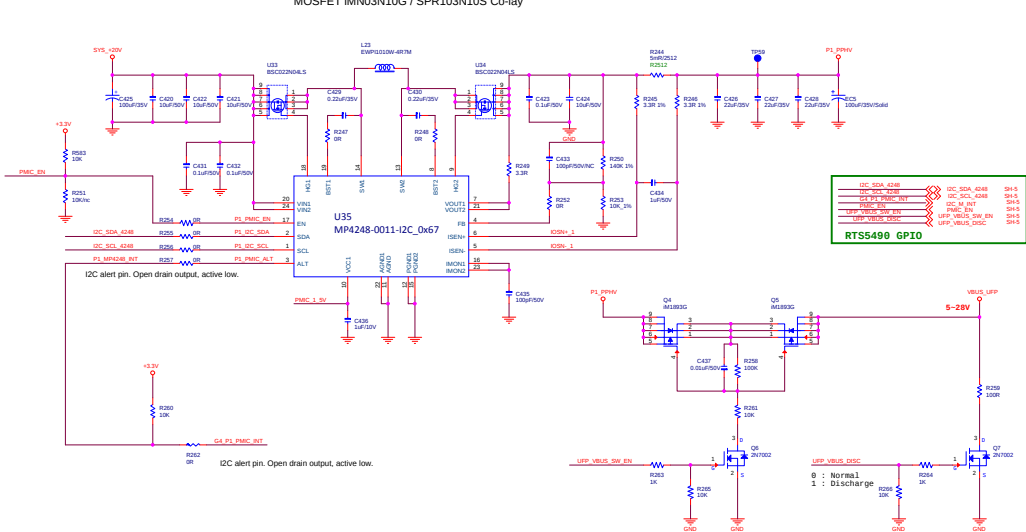

V _{OUT}	V _{REF}	VOUT_COMMAND
5V	0.333V	D56h
9V	0.6V	1800h
15V	1V	2800h
20V	1.333V	3556h
28V	1.8667V	4AABh




Figure 11: Feedback Network.

Port A : DC -DC supply is designed to support all the standard charging profiles as per USB PD 3.1 up to 140W
5V/3A - 15W ; 9V/3A - 27W ; 15V/3A - 45W
20V/5A - 100W ; 28V/5A - 140W

