



Today we have programmed Charging Current versus Temperature and Charging Voltage as following table:

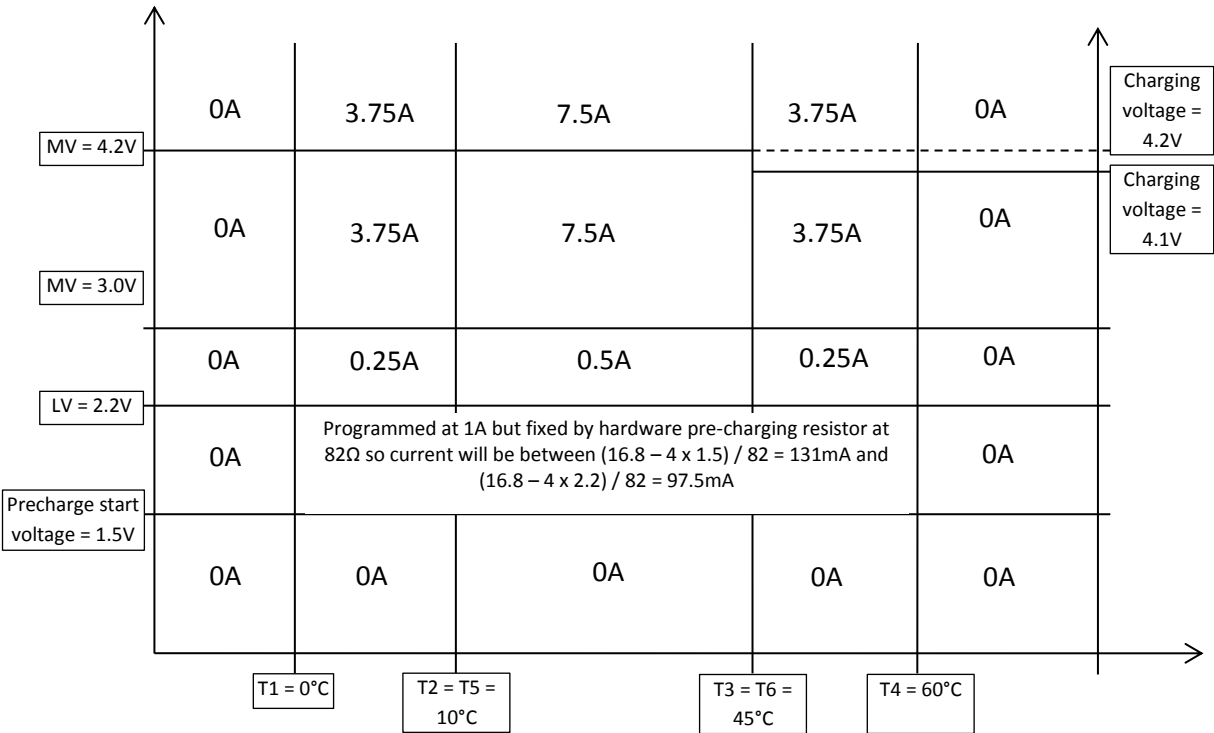

We could have programed like that :

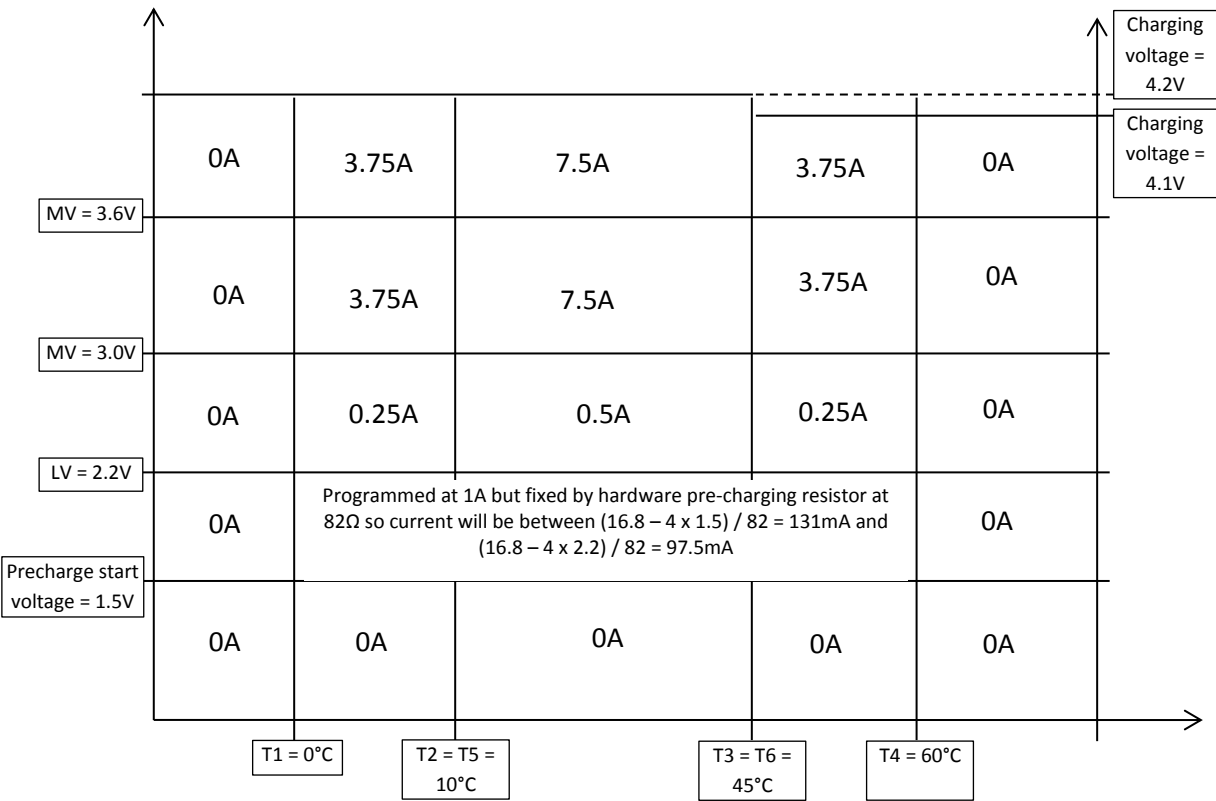

Is there really a difference about the two settings because in both case, we have the same charging current from MV (3.0V) to 4.2V?