

**DC/DC Transformer**


- Flyback transformer for PoE applications
- RoHS Compliant
- Operating Temperature -40°C to +85°C
- Storage Temperature -40°C to +85°C




Electrical Specifications @25°C	
Inductance:	PIN 1-2 = 150 uH ±7% @ 1KHz/0.5V
Leakage Inductance:	PIN 1-2 = 1 uH Max. @ 250KHz/0.5V (PIN 3,4 shorted ; 6,7,8,9,10 shorted)
Interwinding Capacitance:	PIN 1,2-7,8,9,10 = 145 pF @ 100KHz/0.5V (PIN 1,2 shorted ; 7,8,9,10 shorted)
D.C.R	PIN 1-2 = 230 mohm Max.
	PIN 7,8-9,10 = 9.8 mohm Max.
	PIN 4-3 = 230 mohm Max.
	PIN 6-7 = 90 mohm Max.
Turn Ratio:	PIN 1-2 : PIN 7,8-9,10 = 6±3%:1
	PIN 1-2 : PIN 4-3 = 2.66±3%:1
	PIN 1-2 : PIN 6-7 = 6±3%:1
Hi-POT :	PRI. – SEC. = 1500Vrms/60Hz/2S/1mA

**Dimensions**

(Units:  $\frac{\text{Inches}}{\text{mm}}$  , Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0.25}$  )

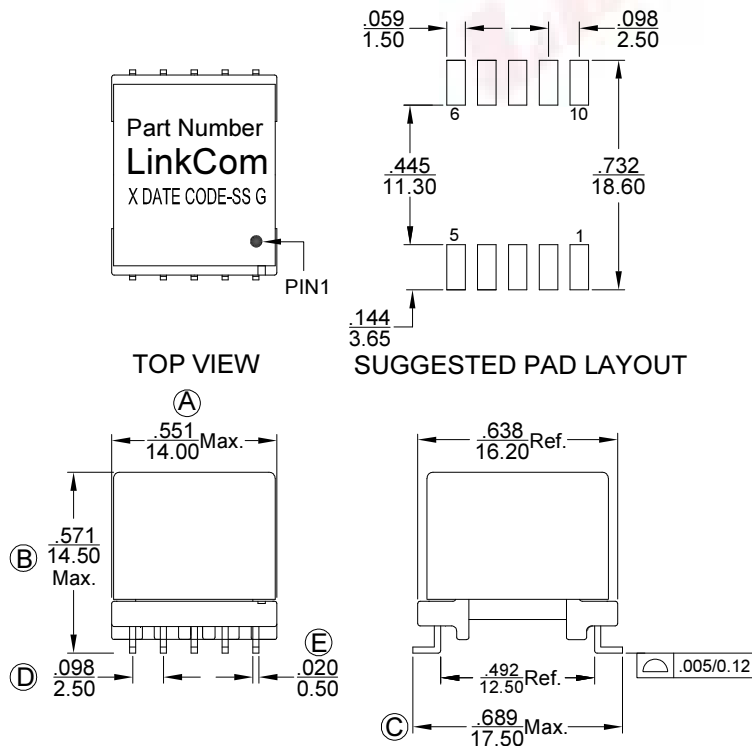

**Schematic**

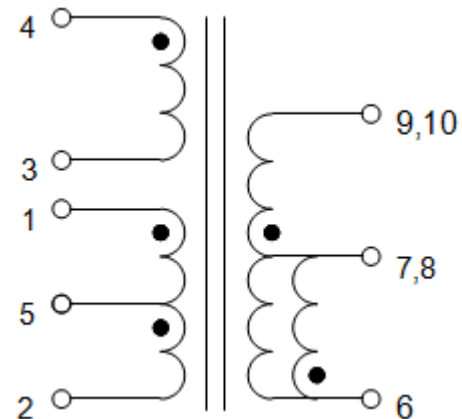

**Mark**

- 1.Part Number----LDT1018
2. X----PRODUCT LINE or BLANK
3. DATE CODE----YYWW
4. SS----50 or BLANK
5. G----RoHS

**Package info**

LDT1018-50R-Tape reel