

A Reliable Power Solution Provider

Lithium Iron Phosphate (LiFePO4) Battery

LFP12.8V9AH


Features

- ♦ Using the technology of lithium iron phosphate cell, superior safety, thousands of cycles, 100%DOD, under normal conditions
- ◆ Built-in automatic protection for over-charge, over discharge, over current and over temperature
- ◆ Maintenance free
- ◆ Internal cell balancing
- ◆ Lighter weight: About 40% ~50% of the weight of a comparable lead acid battery.
- ◆ Can be charged using most standard lead-acid charges (set)
- ♦ Wider temperature range:-20 °C~60 °C
- ◆ Support for serial application expansion (up to 51.2V)

Application

- **♦** UPS
- ◆ Solar &Wind power system
- ◆ Golf Cart
- ◆Electric vehicle , E-bike, E-rickshaw e.g.
- **♦** Lighting



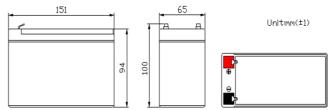



General Specifi	cations	
Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	9Ah@0.2C
	Energy	115.2Wh
	Internal Resistance	80≤mΩ
	Cycle Life	>2000 Cycles @ 0.2C Charge/Discharge at 100%DOD,End of Life 70% Capacity.
	Months Self Discharge	≤3.5% per month at 25°C
Standard Charge	Charge Voltage	14.6±0.2V
	Charge Mode (CC/CV)	At 0 ℃~45 ℃ temperature, charged to 14.6V at a constant current of 0.2C5A, and then, changed continuously with constant voltage of 14.6V until the current was not more than 0.02C5A.
	Charger Current	1.8A
	Max.Charge Current	4.5A
Standard Discharge	Discharge Current	1.8A
	Max. Continuous Current	9A
	Max.Pulse Current	20A(<3S)
	Disxcharge Cut-off Voltage	10.0V
Environmental	Charge Temperature	0° to 45° (32°F to 113°F) @60±25% Relative Humidity
	Disxcharge Temperature	-20 $^{\circ}\!$
	Storage Temperature	0° to 45° (32°F to 113°F) @60±25% Relative Humidity
	Water Dust Resistance	IP55
Mechanical	Cell & Method	IFR26650 N30,4S3P
	Plastic Case	ABS
	Dimension(L*W*H*TH)	151*65*94*100mm
	Weight	Approx. 1.34Kg
	Terminal	F2

A Reliable Power Solution Provider


Lithium Iron Phosphate (LiFePO4) Battery

LFP12.8V9AH

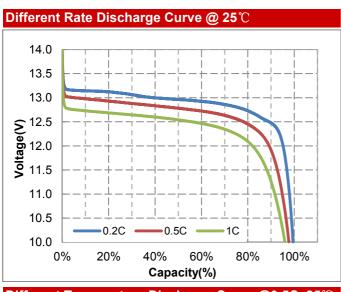


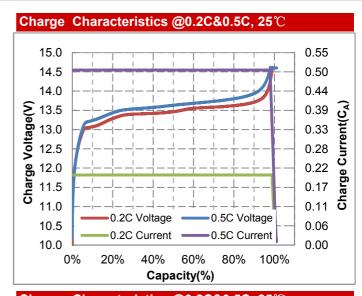




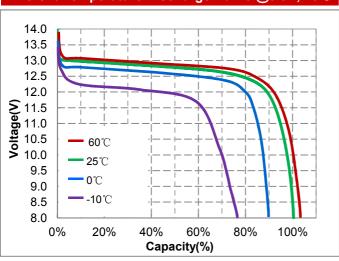




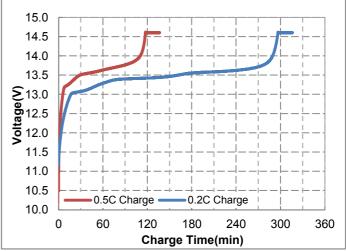

Different DOD Discharge Cycle Life Curve @0.5C, 25°

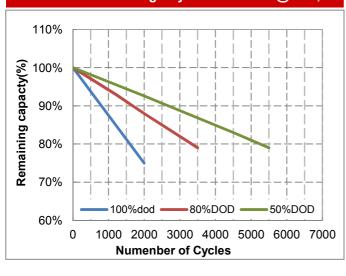

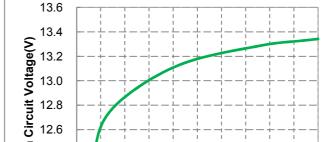

Open circuit voltage VS SOC%