




SRP_B- and GND should be same in layout

Differential route for sense resistor

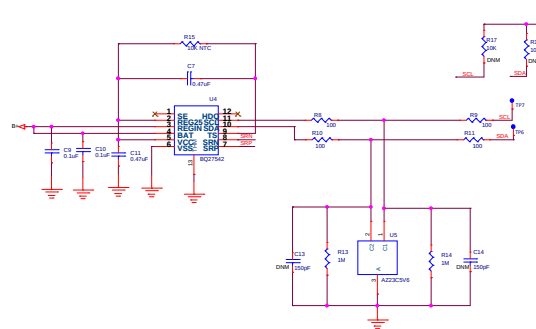

SPARK GAP FOR ESD PROTECTION

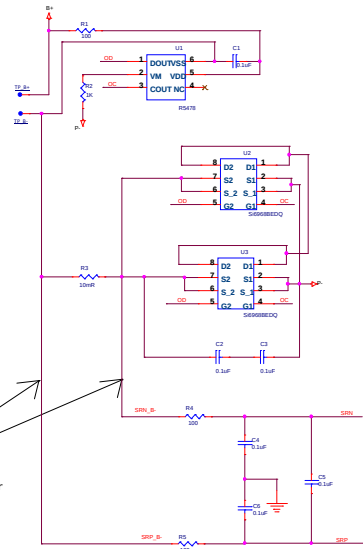