


SPECIFICATION

ITEM	SMD,INDUCTOR,4.7uH
FENG JUI P/N.	TPRH0603-4R7MA
ELECTRICAL REQUIREMENTS	INDUCTANCE: 4.7uH±20% DCR: 0.09Ω MAX. Isat current: 1.8A (Drops 35% typ.) Irms current: 1.5A (△T=40℃ typ.)


TEST METHOD:

TEST EQUIPMENT	HIOKI3532 CH 1062A / CH 1320
TEST FREQUENCY	100kHz, 0.25V


DIMENSION : (UNIT:mm)

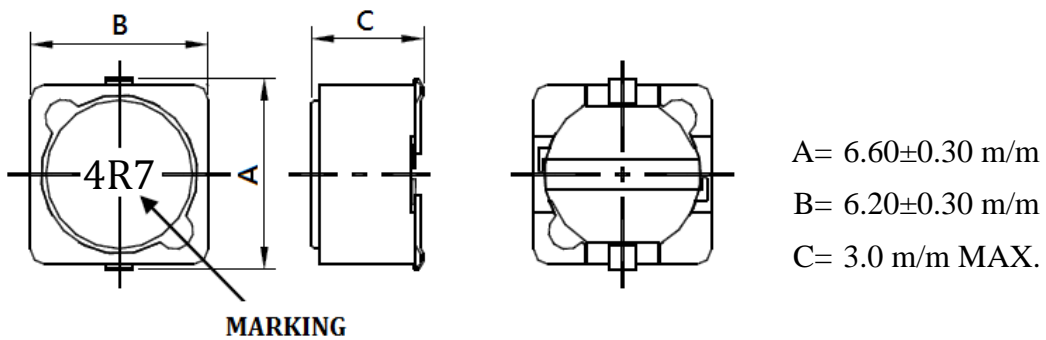

SCHEMATICS:



LAND PATTERNS:



APPROVED	CHECKED	CORRECT	DESIGNED

FENG JUI TECHNOLOGY CO., LTD

FILE NO.

DATE
2018/07/25

REV.
A/0

PAGE
1

FORM NO: QPTE01-F0101

SPECIFICATION

PACKAGING QUANTITIES

TYPE	Pcs / REEL
TPRH0603	1,500


REEL DIMENSIONS UNIT:mm

TYPE	W	D	C	T1	N	T2	E
UR-13	330±1.5	21.5+0.5/-0	13+0.5/-0.2	16.5+0.5/-0	100±1.5	21.4±0.4	2.00±0.5

Material: Palstic

UNIT:mm

W1	16.00±0.3
I	1.75±0.1
F	7.50±0.1
P0	4.00±0.1
G	2.00±0.1
P1	12.00±0.1
C	6.40±0.1
t0	0.35±0.05
D	6.90±0.1
H	3.00±0.1

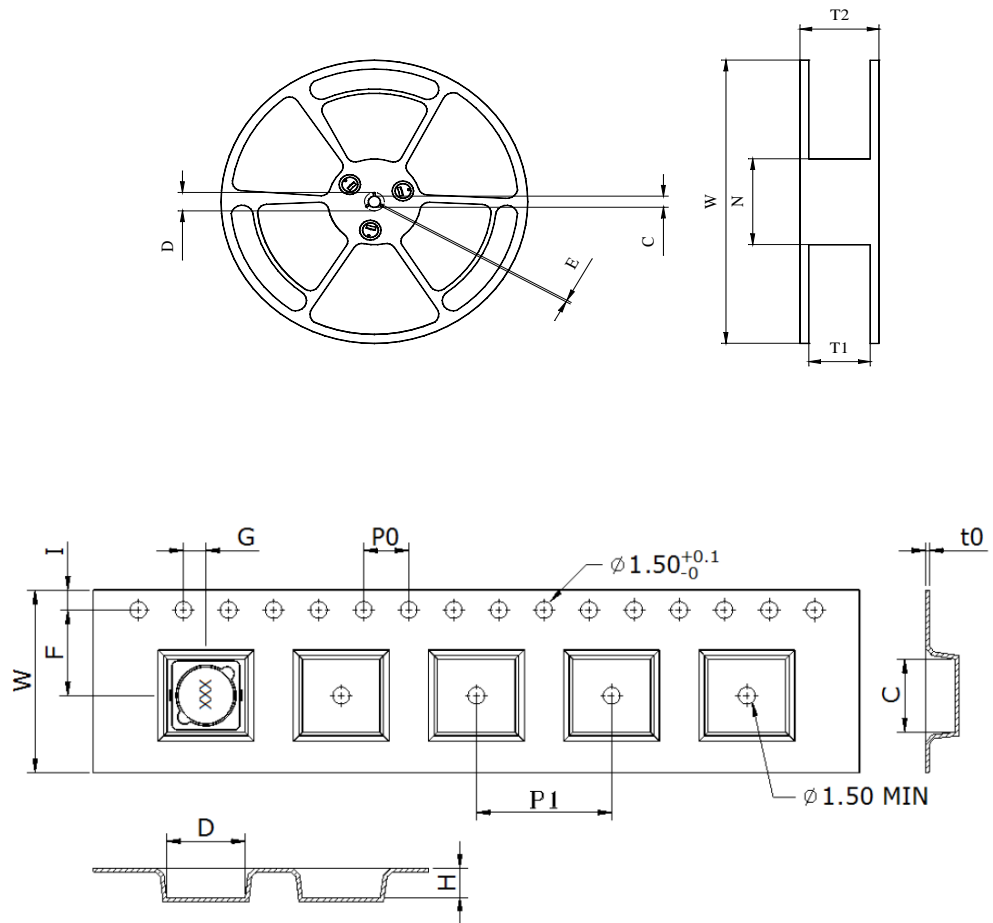

APPROVED	CHECKED	CORRECT	DESIGNED

FENG JUI TECHNOLOGY CO., LTD

FILE NO.

DATE
2018/07/25

REV.
A/0

PAGE
3

FORM NO: QPTE01-F0101

RELIABILITY TEST

1. Operating temperature range

-40 TO + 105°C (Includes temperature when the coil is heated)

2. External appearance

On visual inspection, the coil has no external defects.

3. Terminal strength

After soldering. Between copper plate and terminals of coil. Push in two directions of X.Y withstanding at below conditions.

Terminal should not peel off. (refer to figure at right)

5. 0N 60 sec.

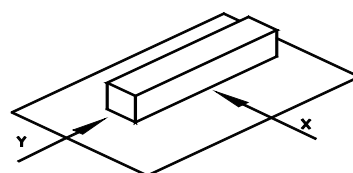


Figure 1

4. Insulating resistance.

Over 100MΩ at 100V D.C. between coil and core.

5. Dielectric strength

No dielectric breakdown at 100V D.C. for 1 minute between coil and core.

6. Temperature characteristics

Inductance coefficient $(0 \sim 2,000) \times 10^{-6} / ^\circ\text{C}$ $(-25 \sim +80^\circ\text{C}$ degree Celsius)

inductance deviation within $\pm 5.0\%$, after 96 hours

7. Humidity characteristics(Moisture Resistance)

Inductance deviation within $\pm 5\%$, after 96 hours in 90~95% relative humidity at $40 \pm 2^\circ\text{C}$ and 1 hour drying under normal condition.

8. Vibration resistance

Inductance deviation within $\pm 5\%$, after vibration for 1 hour. In each of three orientations at sweep vibration (10~55~10 Hz) with 1.5mm P-P amplitudes.

9. Shock resistance

Inductance deviation within $\pm 5\%$, after being dropped once with 981m/s^2 (100G) shock attitude upon a rubber block method shock testing machine, in three different orientations.

10. Resistance to Soldering Heat: 260°C , 10 seconds(See attached recommend reflow)

11. Storage environment

Storage condition: Temperature Range: $0^\circ\text{C} \sim 35^\circ\text{C}$; $-40^\circ\text{C} \sim 105^\circ\text{C}$ (after PCB)

Humidity Range: 50% ~ 70% RH

Use components within 12 months. If 12 months or more have elapsed, check solderability before use.

APPROVED	CHECKED	CORRECT	DESIGNED


FENG JUI TECHNOLOGY CO., LTD	FILE NO.	DATE	REV.	PAGE
		2018/07/25	A/0	4

FORM NO: QPTE01-F0101

ROHS SPECIFICATION

GENERAL CHARACTERISTICS

Lead-free heat endurance test

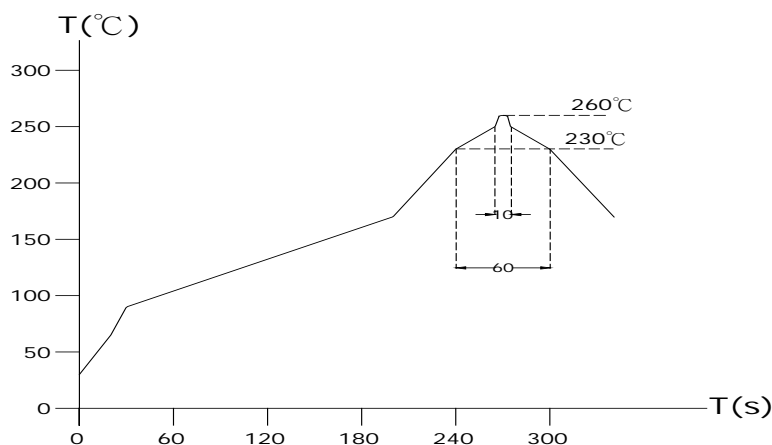


※The test should be made under the conditions according to the chart,
after the test it is kept for 2hours under the normal temperature and humidity.

Then, no mechanical and electrical defect should be found out.

※The reflow test can be done twice, but the interval should be more than one hour under
the normal conditions.

※The reflow test conditions are based on the testing instruments available in our company.

Lead-free the recommended reflow condition

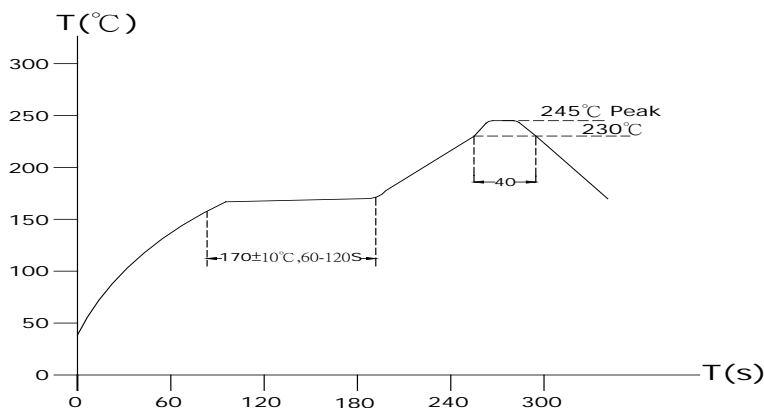

※The reflow condition recommended above is according to the machine used by our company.

Big differences will arise as a result of the type of machine, reflow conditions, method, etc. used.

Hence, before setting up your reflow conditions, please confirm with the above.

APPROVED	CHECKED	CORRECT	DESIGNED

FENG JUI TECHNOLOGY CO., LTD

FILE NO.

DATE
2018/07/25

REV.
A/0

PAGE
5

FORM NO: QPTE01-F0101