


電源冗長接続コントローラ

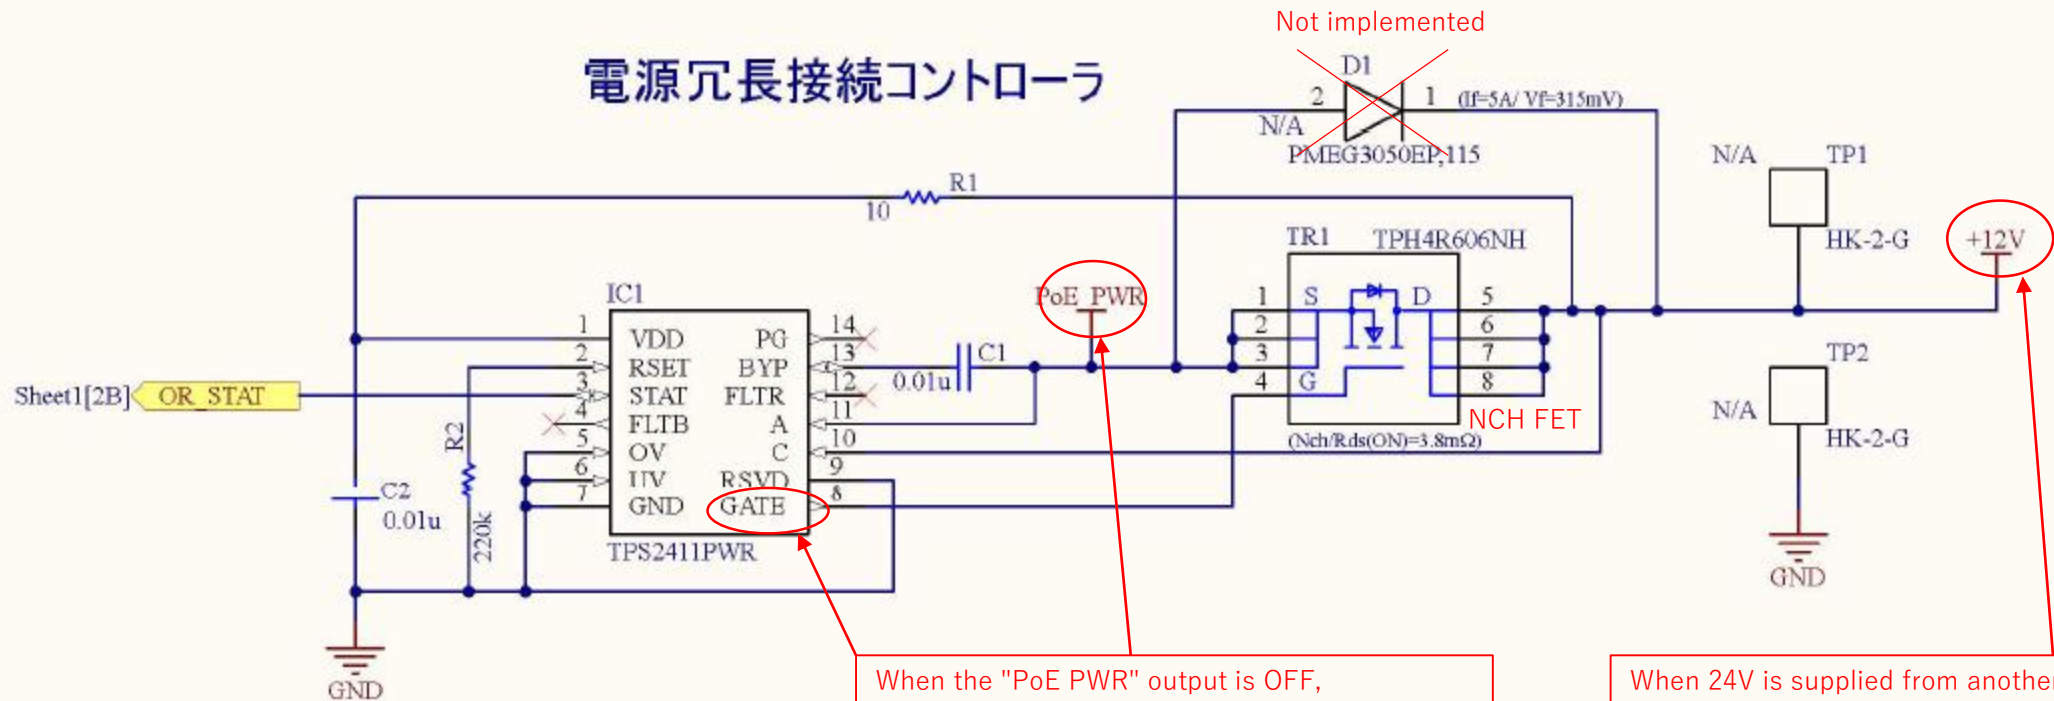

When the "PoE PWR" output is OFF, a voltage of about +5V is applied to "PoE PWR". At that time, the output of the "GATE" is 0V.

When 24V is supplied from another power source and applied this "+12V"