I want to use only Vo2 and Vo3 of TPS65105. Can I use Vo2 and Vo3 without Vo1?

If possible, is it okay if the red frame parts of the reference circuit shown below are not mounted?

As a result of not mounting, the pins in the blue frame become floating.

Please let me know the correct pin treatment.

VCOMIN: GND connection.
BASE: VIN connection.
FB4: VIN connection.
ENR: GND connection.
VCOM: Floating.

SW, FB1, SUP: Please let me know the treatment.

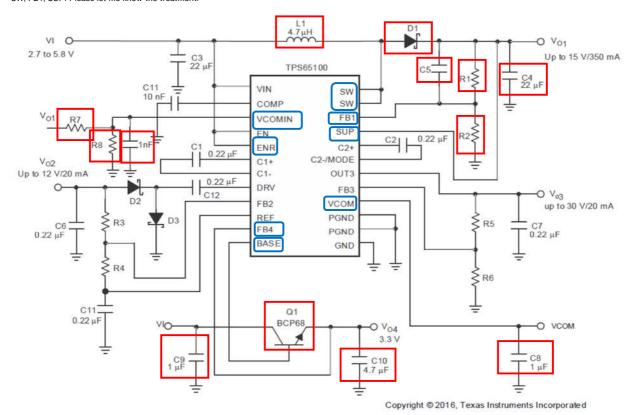


Figure 15. Typical Application Circuit