


TPSM41625 Tape & Reel

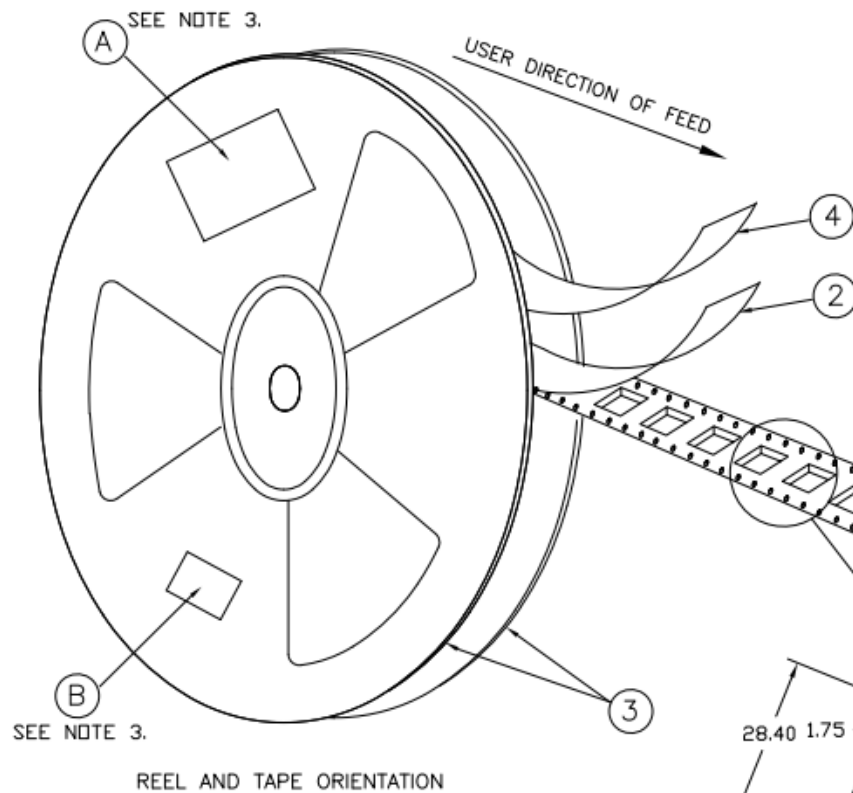


NOTES:

- 1) PROCESS IN ACCORDANCE WITH EIA-481-2
 - * TAPE LEADER DIMENSION 30.00" [76.2mm] MIN.
 - * TAPE TRAILER DIMENSION 12.6" [32mm] MIN.
- 2) PARTS SHOULD BE PACKAGED IN ACCORDANCE WITH ESD GUIDELINES IN EIA-541.
- 3) REEL LABEL: 'A'- * TI PART NUMBER.
 * QUANTITY
 * DATE CODE
 * LOT NUMBER
 * MSL DATA
 * MADE IN
 * ASSY SITE ORIGIN
 * COUNTRY OF ORIGIN
 * SUPPLIER

'B'- ANTI-STATIC CAUTION LABEL

- 4) NO REQUIREMENT FOR TAPE DIRECTION OF FEED FROM SUPPLIER REEL.

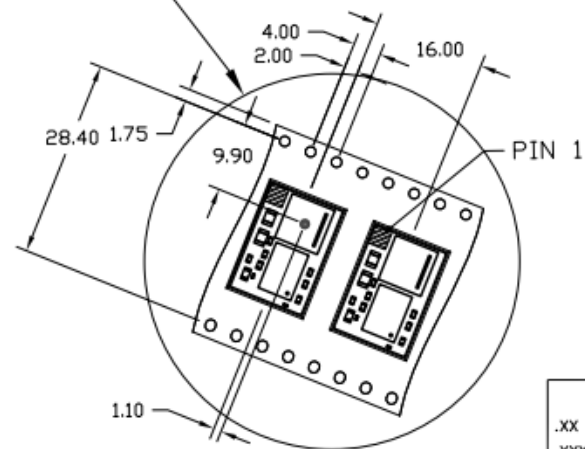

DEVICE SUFFIX	INFO
TAPE WIDTH	32mm (1.260")
PITCH	16mm (0.629")
REEL SIZE	13" DIA.
DEVICES/REEL	250

TOLERANCES UNLESS OTHERWISE SPECIFIED

.XX = ±0.005 HOLES = ±0.001
 .XXX = ±0.003 ANGLES = ± 1/2°