


2024/10/15 F200 ヒューズ追加
2024/10/15 R239,C215 スナバ回路追加
2024/10/16 JK200 B列ピンにもUSBライン接続追加

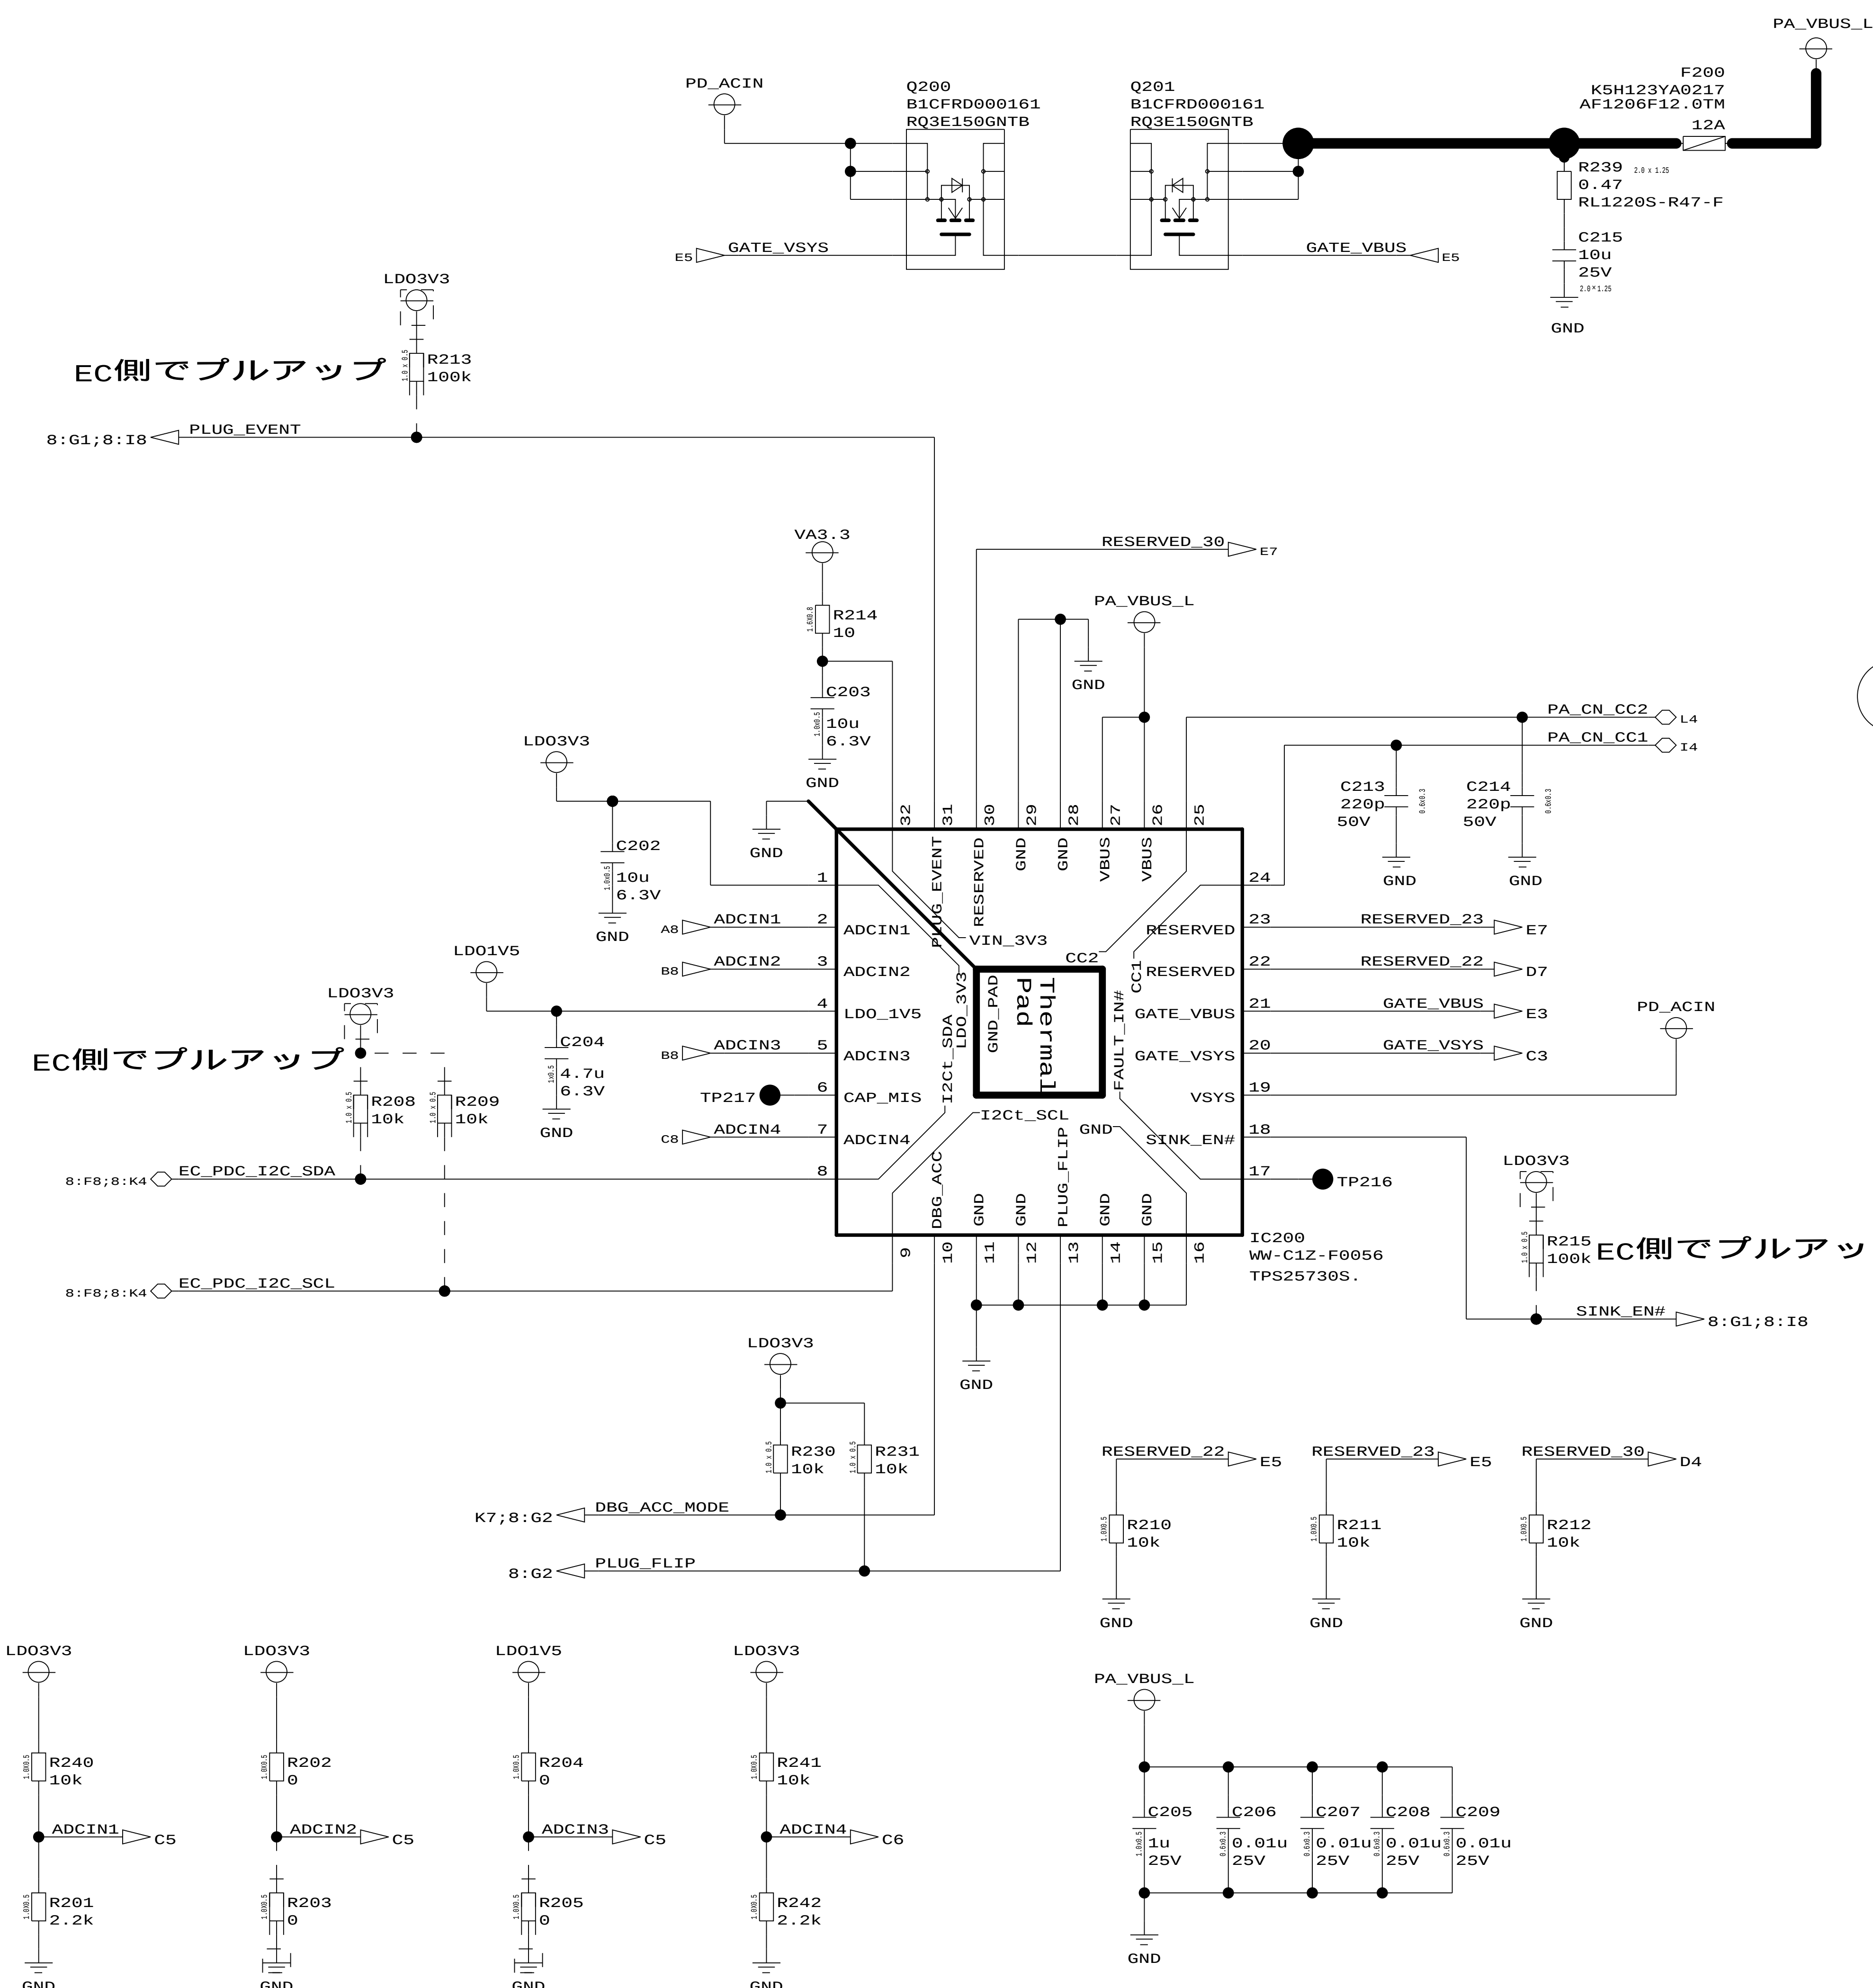

EC側でプルアップ

EC側でプルアップ

EC側でプルアップ


ADCIN1|Decoded Value : 3

ADCIN2|Decoded Value : 7

ADCIN3|Decoded Value : 5

ADCIN4|Decoded Value : 3


TypeC
Connector
(こじり強度対策品)

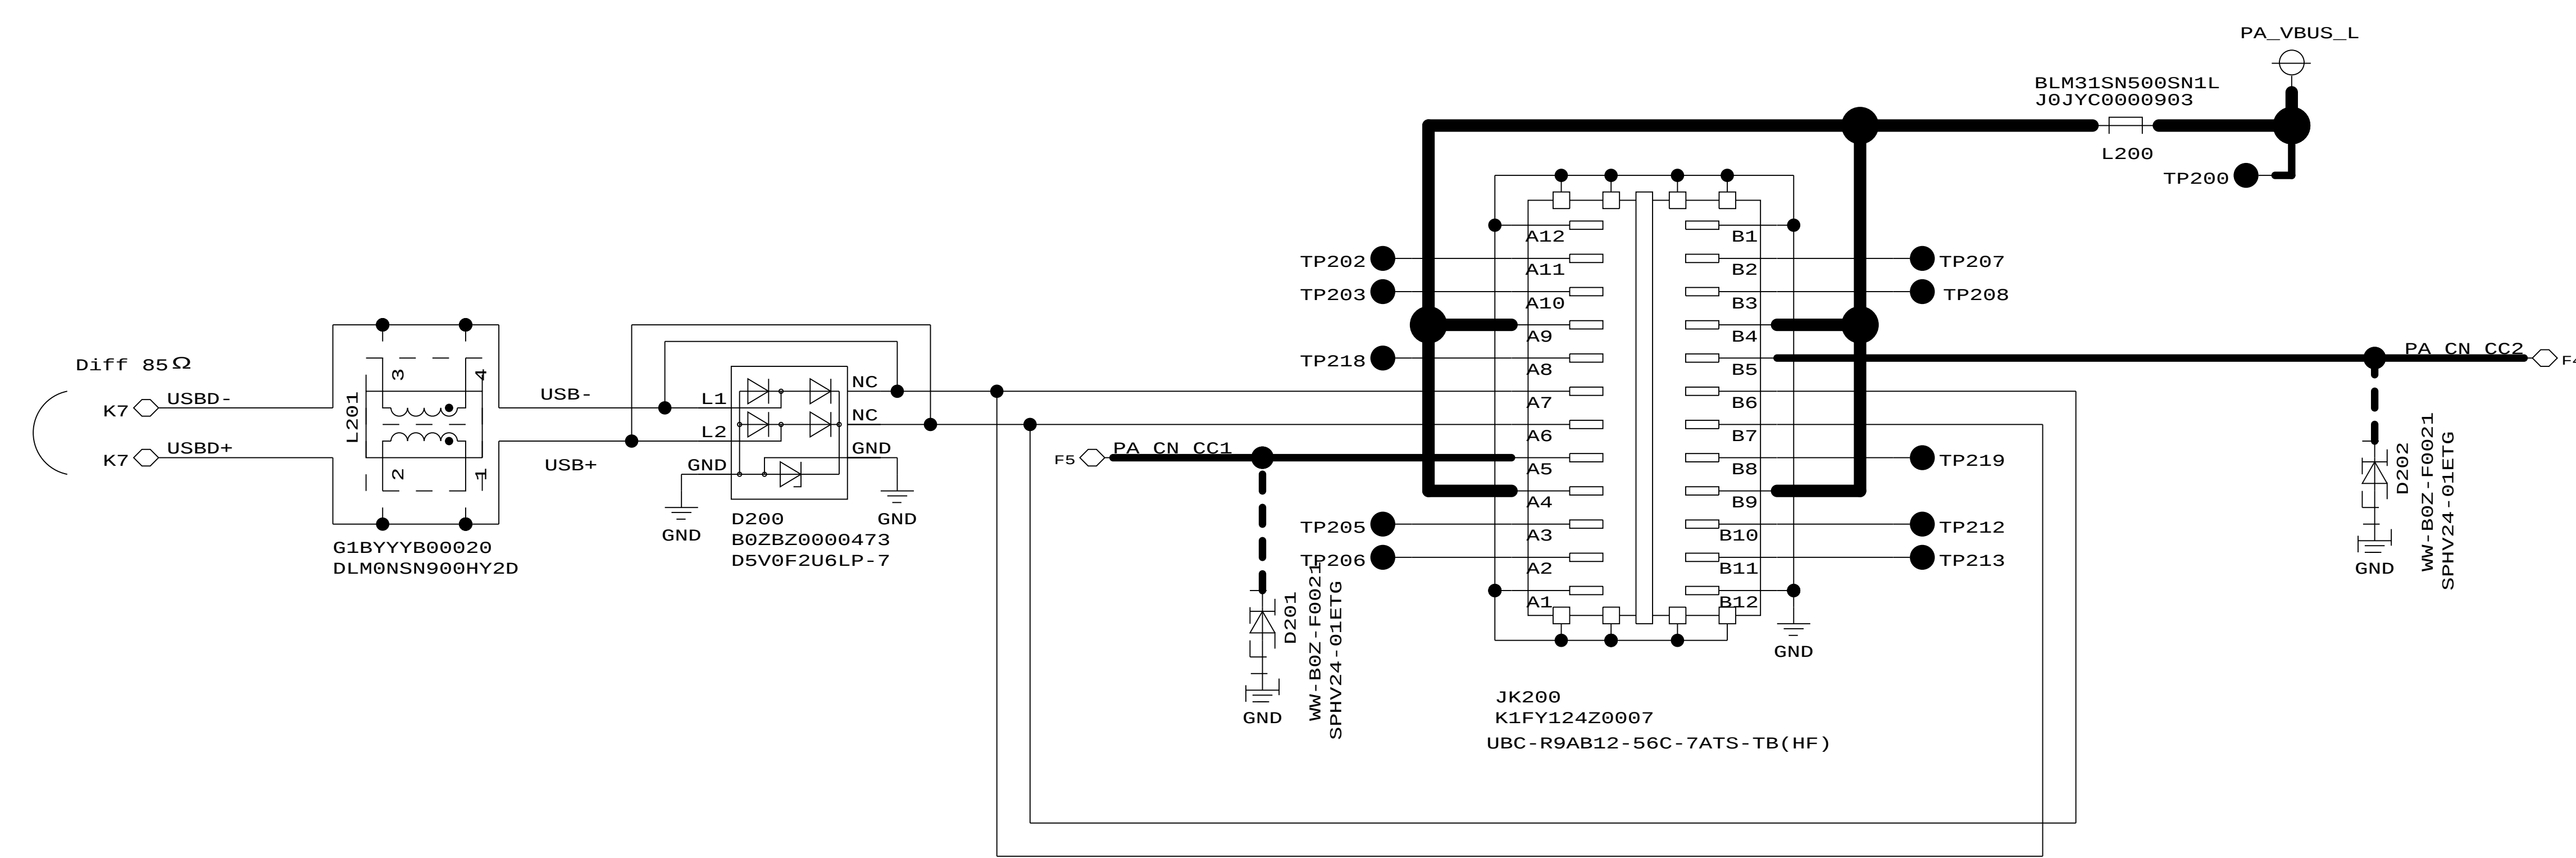

To correspond for PCSS,
don't place any components
between VBUS line & GND before fuse.

S	OE_n	FUNC
X	H	DISCONNECT
L	L	D=1D
H	L	D=2D

S	/OE	Function
X	H	Disconnect
L	L	D=1D
H	L	D=2D

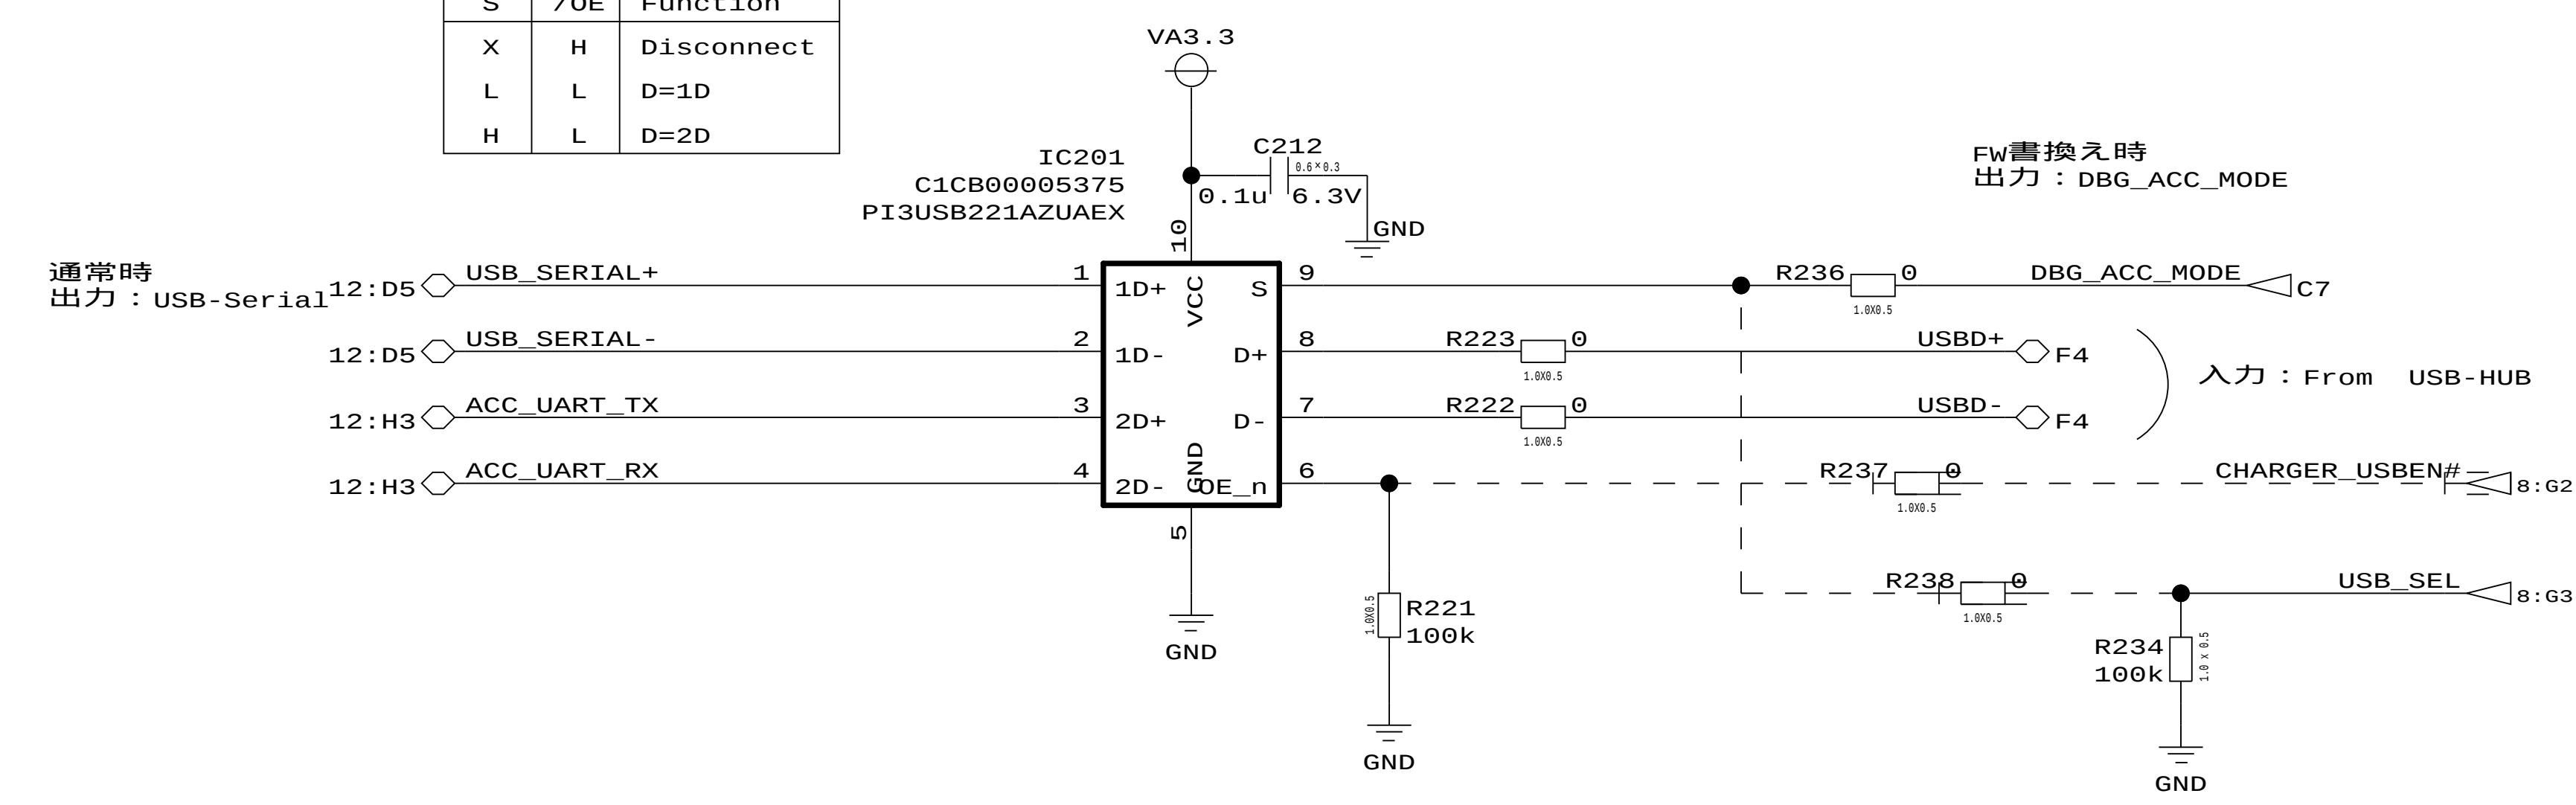

TypeC
Connector
(こじり強度対策品)

To correspond for PCSS,
don't place any components
between VBUS line & GND before fuse.

