

Primary Lithium Battery Technology Specification

Customer _____

Part name Primary Lithium Battery

Model No ER34615M 14000mAh 3.6V

Serial No _____

Produce No _____

Approved by		Drafted by	Wenfei liang
Checked by		Signed by	Xiaojun Nie
Prepared by		Valid Date	2018-08-22

Company address: 4th Building, Meitai Technology Park, Guanguang
Road, Longhua, Shenzhen, China

(Tel) : +86-755-86670672

(Fax) : +86-755-86670609

E-mail: pkcell@pkcell.net pkcell@pkcell.com

Website: <http://www.pkcell.net> <http://www.pkcell.com>

1.Scope

This specification is applied to the reference battery in this Specification and manufactured by ShenZhen PKCELL Battery Co., Ltd.

2.Product Specification (23±2℃)

No.	Item	General Parameter	Remark
1	Nominal Capacity	14000mAh	Discharge at 10mA to 2.0V
2	Rated Voltage	3.6V	Mean Operation Voltage
3	Max Constant Discharge Current	2000mA	—
4	Max Pulse Discharge Current	3000mA	—
6	Operating temperature range	-55~85℃	—
7	Avaliable Terminations	S :Standard Terminations	Special Termination are avaliable upon request ⁻²⁻
		T : Solder Tabs	
		P :Axial Pins	

3. Benefits

- High energy density, High voltage, stable during most of the application's lifetime
- Wide range of operating temperature
- Long self-dischager rate (≤1% per year during Storage)
- Long storage life (10 years under room temperature)

4. Main application


- Intelligent instrument and meter
- Memory and standby power, Alarms and security devices
- Automotive electronics, Electronic toll collection
- Military devices

5. Warning

ADD: 4th Building, Meitai Technology Park, Guangang Road, Longhua, Shenzhen, China. 518110

- Fire, explosion and burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C incinerate.
- Do not use the battery beyond the permitted temperature range.

7. Dimension:

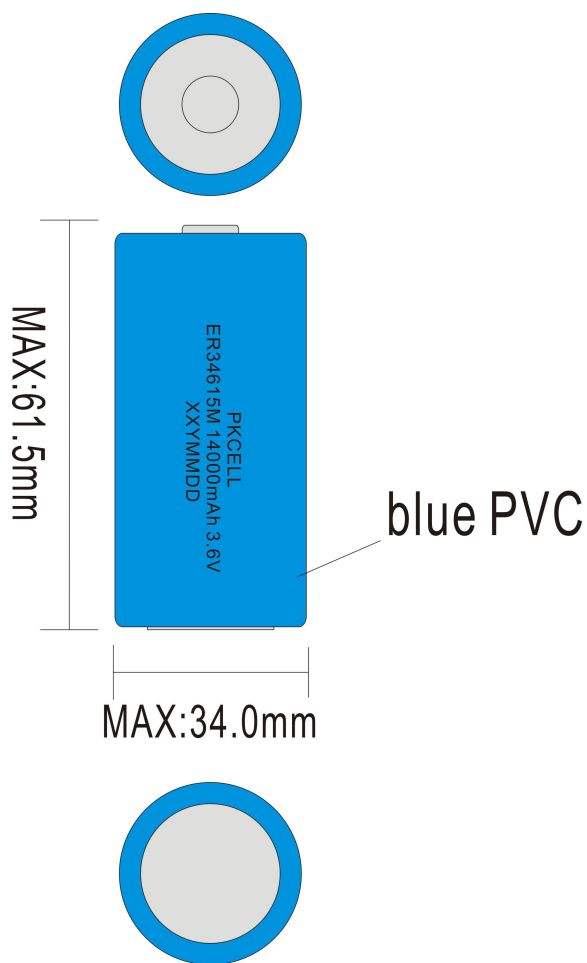

- 3 -

.....END.....