

- 1. Close GUI, power cycle the board
- 2. Launch the UCD90xxx Device as shown below.



3. Click scan device in ROM mode

UCD3XXX / UCD9XXX Device GUI



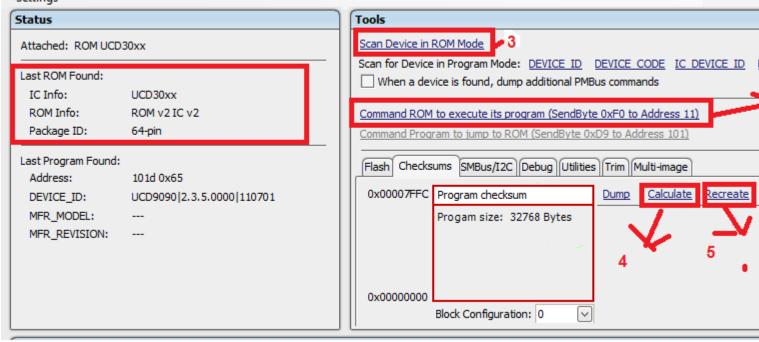

- 4. Click the calculate and expect to set 0x002C554E as shown in the log section
- 5. If you do see 0x002C554E, click the recreate to generate the checksum
- 6. The last step is to command ROM to execute its program.
- 7. After above step, the device shall function as normal.