


■ Measurement Condition


- After shorting the output, the input signal (APH, AEN) is changed from Low to High.
- Ripple control decay

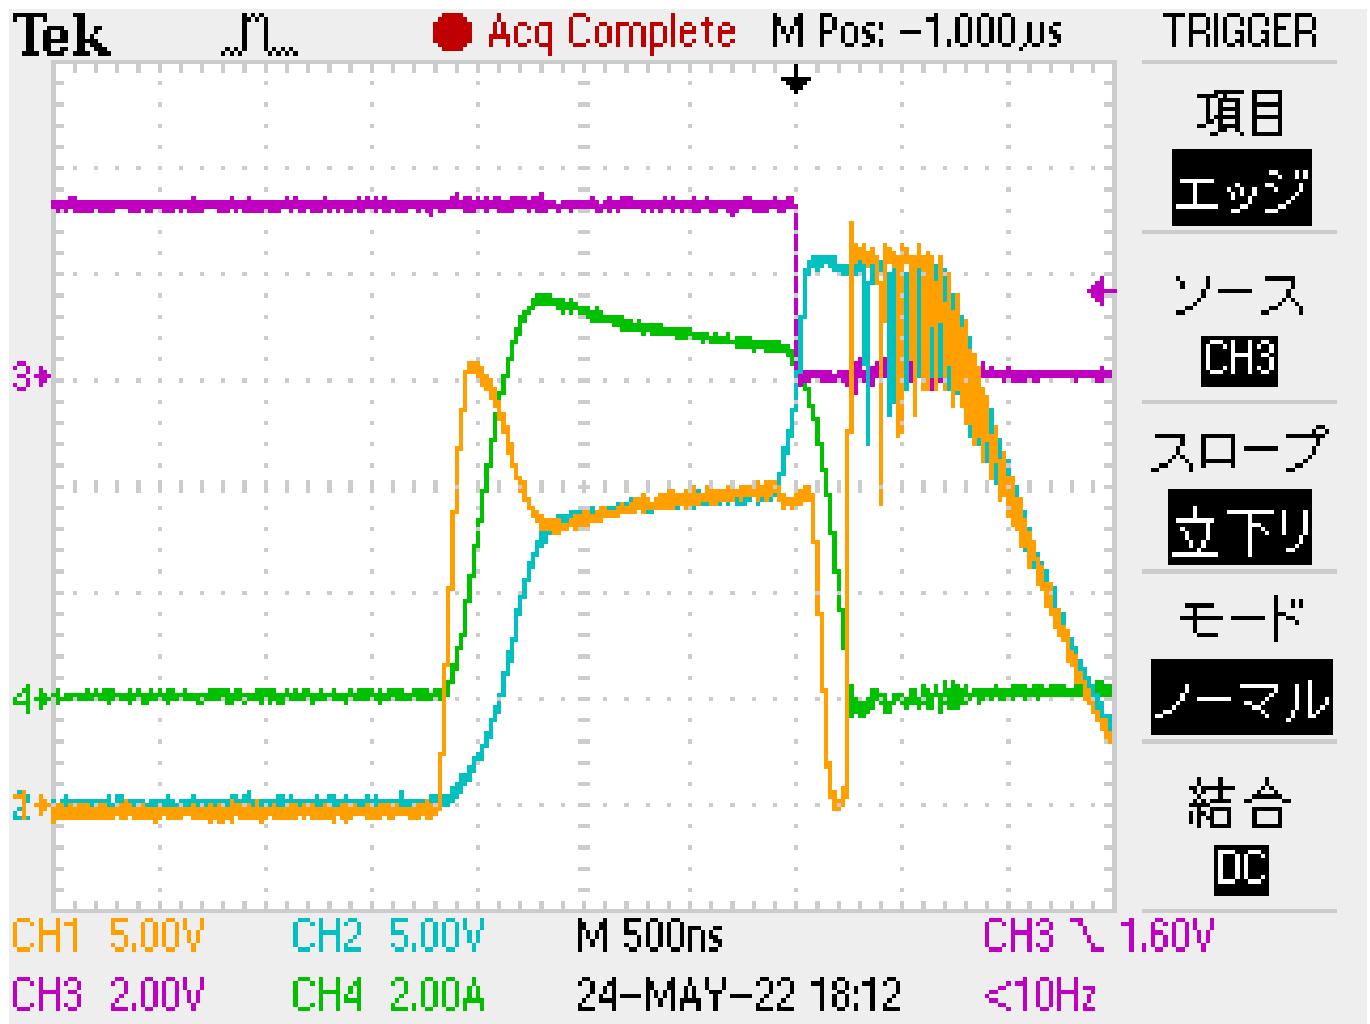

Ch1:AOUT1 , Ch2:AOUT2 , Ch3:nFAULT , Ch4:short current

■ Measurement Condition


- After setting the input signal to High, short the output
- Mixed decay
- Toff=7us

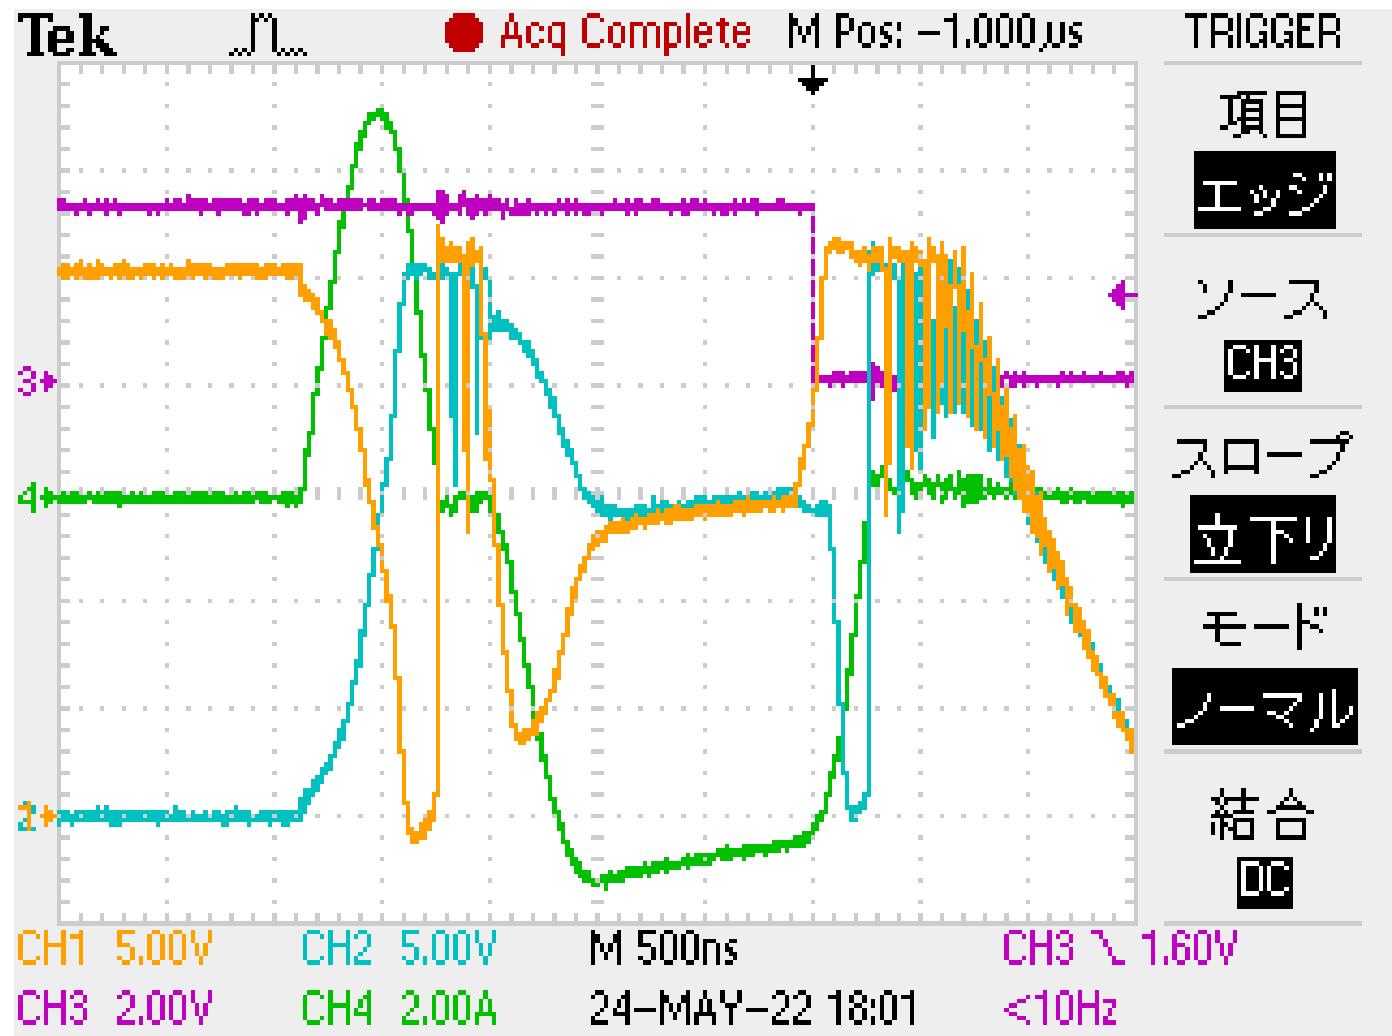

Ch1:AOUT1 ,Ch2:AOUT2 ,Ch3:nFAULT ,Ch4:short current

■ Measurement Condition

- After setting the input signal to High, short the output
- Mixed decay
- Toff=32us

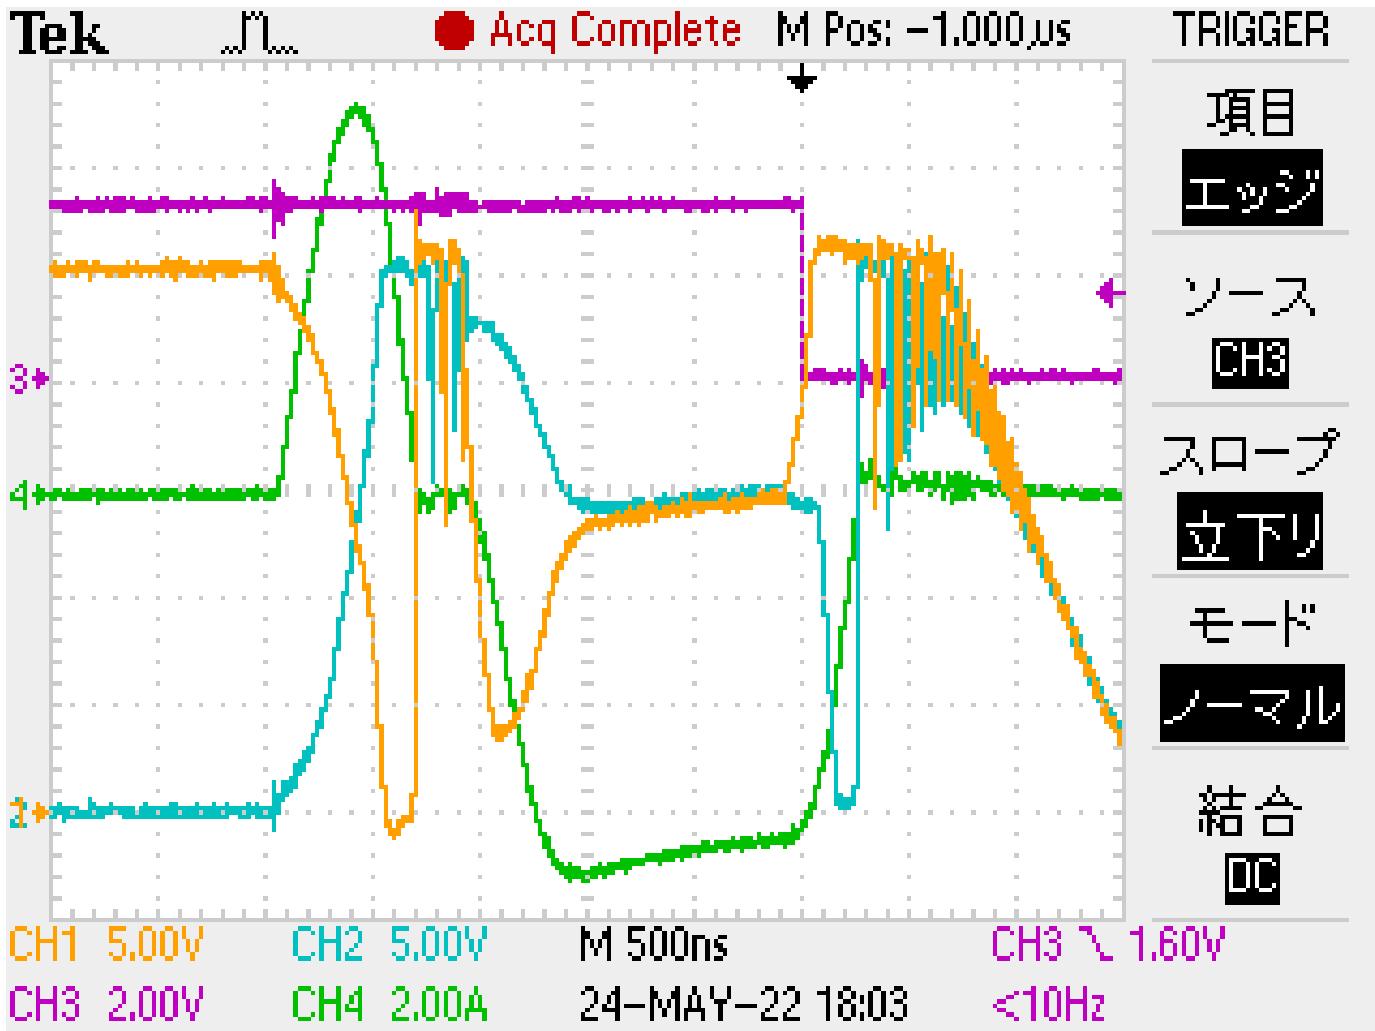

Ch1:AOUT1 ,Ch2:AOUT2 ,Ch3:nFAULT ,Ch4:short current