PCIe_CLK BUFFER

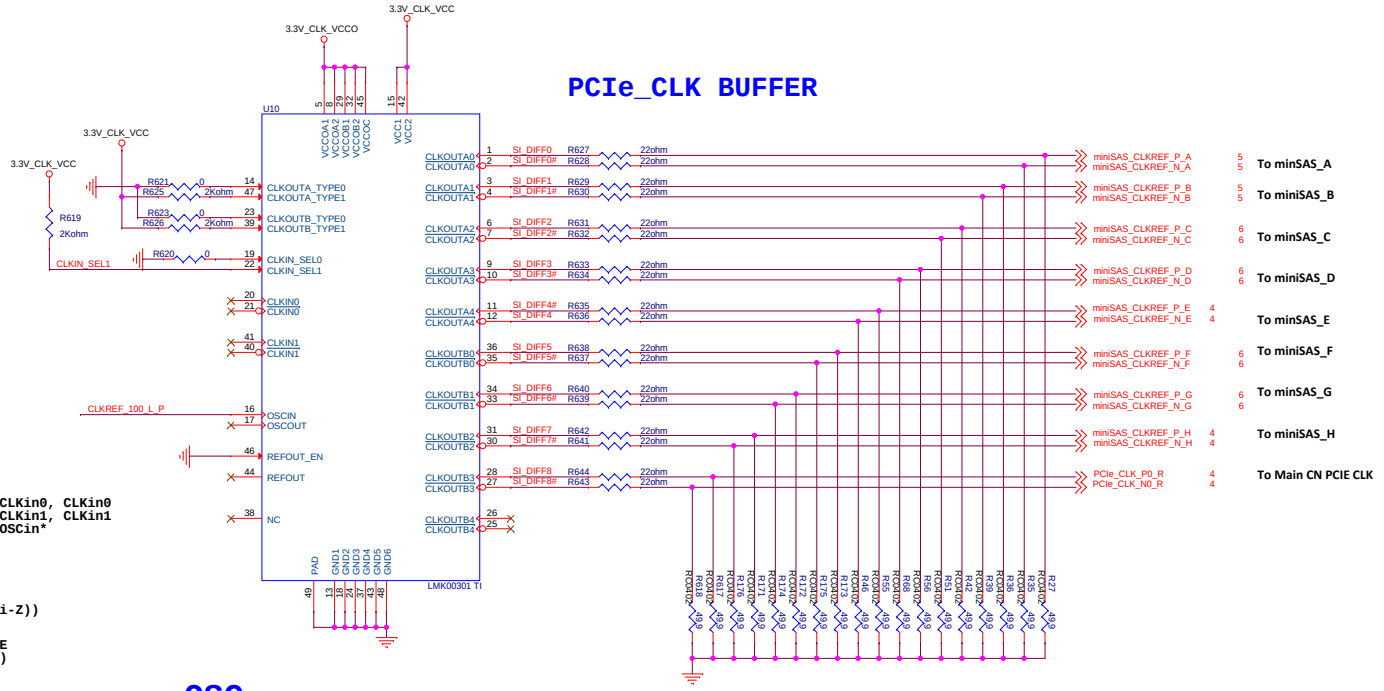







Input Selection
CLKin_SEL[1.0]: 00 - CLKin0, CLKin0
: 01 - CLKin1, CLKin1
: 1x - OSCin*

CLKoutx_TYPE[1..0] :
00 - LVPECL
01 - LVDS
10 - HCSL*
11 - Disabled (Hi-Z))

REFout_EN REFout STATE
0 - Disabled (Hi-Z)
1 - Enabled

OSC

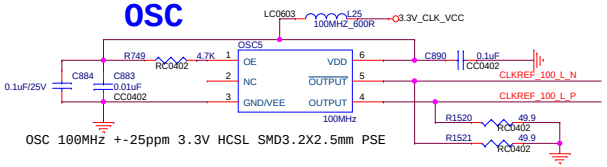

OSC 100MHz +-25ppm 3.3V HCSL SMD3.2X2.5mm PSE

I2C MUX

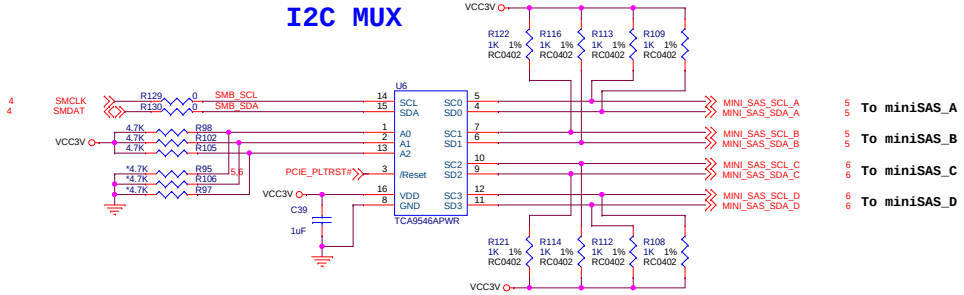

Write Address = 0xEE
Read Address = 0xEF

I2C MUX

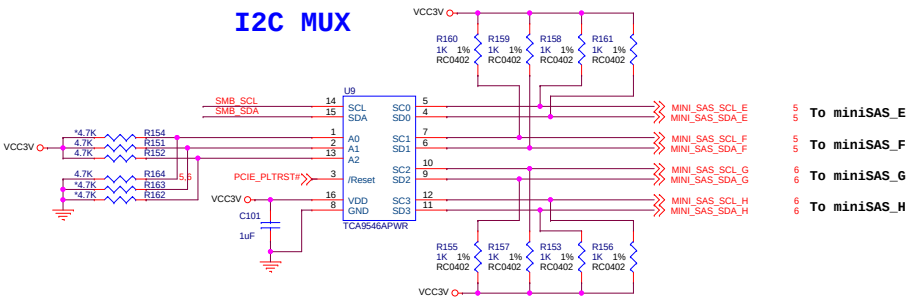

Write Address = 0xEC
Read Address = 0xED

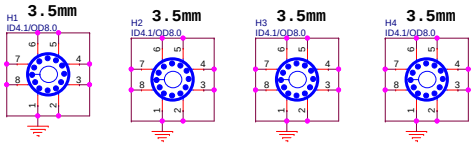

This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without expressed written permission.

FMA-HW01008-01 R01

annapurnalabs an amazon company

Model Name	Rev
K2V3	R0A

Size	Page Name	Engineer
C	PCIE16 Golden Finger/CLK Buffer	

Date: Sheet 3 of 8