

Spread Spectrum Clock Generator

Ultra Low Power Mobile EMI Reduction IC

SSDCA3128AF

■ DESCRIPTION

The SSDCA3128AF is a versatile 1x spread spectrum frequency modulator designed to reduce electromagnetic interference (EMI) clock and data source, allowing system wide reduction of EMI of down stream clock and data dependent signals. The SSDCA3128AF allows significant system cost savings by reducing the number of circuit board layers ferrite beads, shielding and other passive components that are traditionally required to pass EMI regulations. The SSDCA3128AF family of mobile active EMI management ICs are unique in their design by eliminating the use of conventional PLLs. This allows operation on aperiodic as well periodic signals. The peak energy is distributed over a wider and controlled energy band thereby significantly lowering system

EMI compared to the typical narrow band signal produced by oscillators and most frequency generators. Lowering EMI by increasing a signal's bandwidth is known as "Spread Spectrum" or active EMI management.

3128 has an input frequency range of 1 MHz to 40 MHz over a wide voltage range of 1.65V to 3.6V and generates a 1x spread spectrum output. The device can be placed in "power save mode" by setting the PDB pin to GND where in it draws typically 0.1uA and also steers the MODOUT pin to a High-Z state. The device has two "Spreading Range control pins" SS1 and SS0 to allow flexibility and optimization of both EMI compliance as well in system design.

■ FEATURE

- FCC approved method of EMI attenuation.
- Generates a 1X low EMI spread spectrum clock of the input frequency.
- Input / Output frequency 1 MHz to 40 MHz
- VDD 1.65V - 3.6V
- Multiple Spreading Range Selections(Refer product table)
- Power save mode
- 8-pin TDFN package
- Operating Temperature -40°C to 125°C
- AEC-Q100 qualified available

■ Application


Application such as MFP, STB, DSC, MID,

HDMI, LCD panel Camcorder, and other timing

sensitive analog video imaging applications


Applications of HDMI, RJ45 port has good compatibility

■ BLOCK DIAGRAM

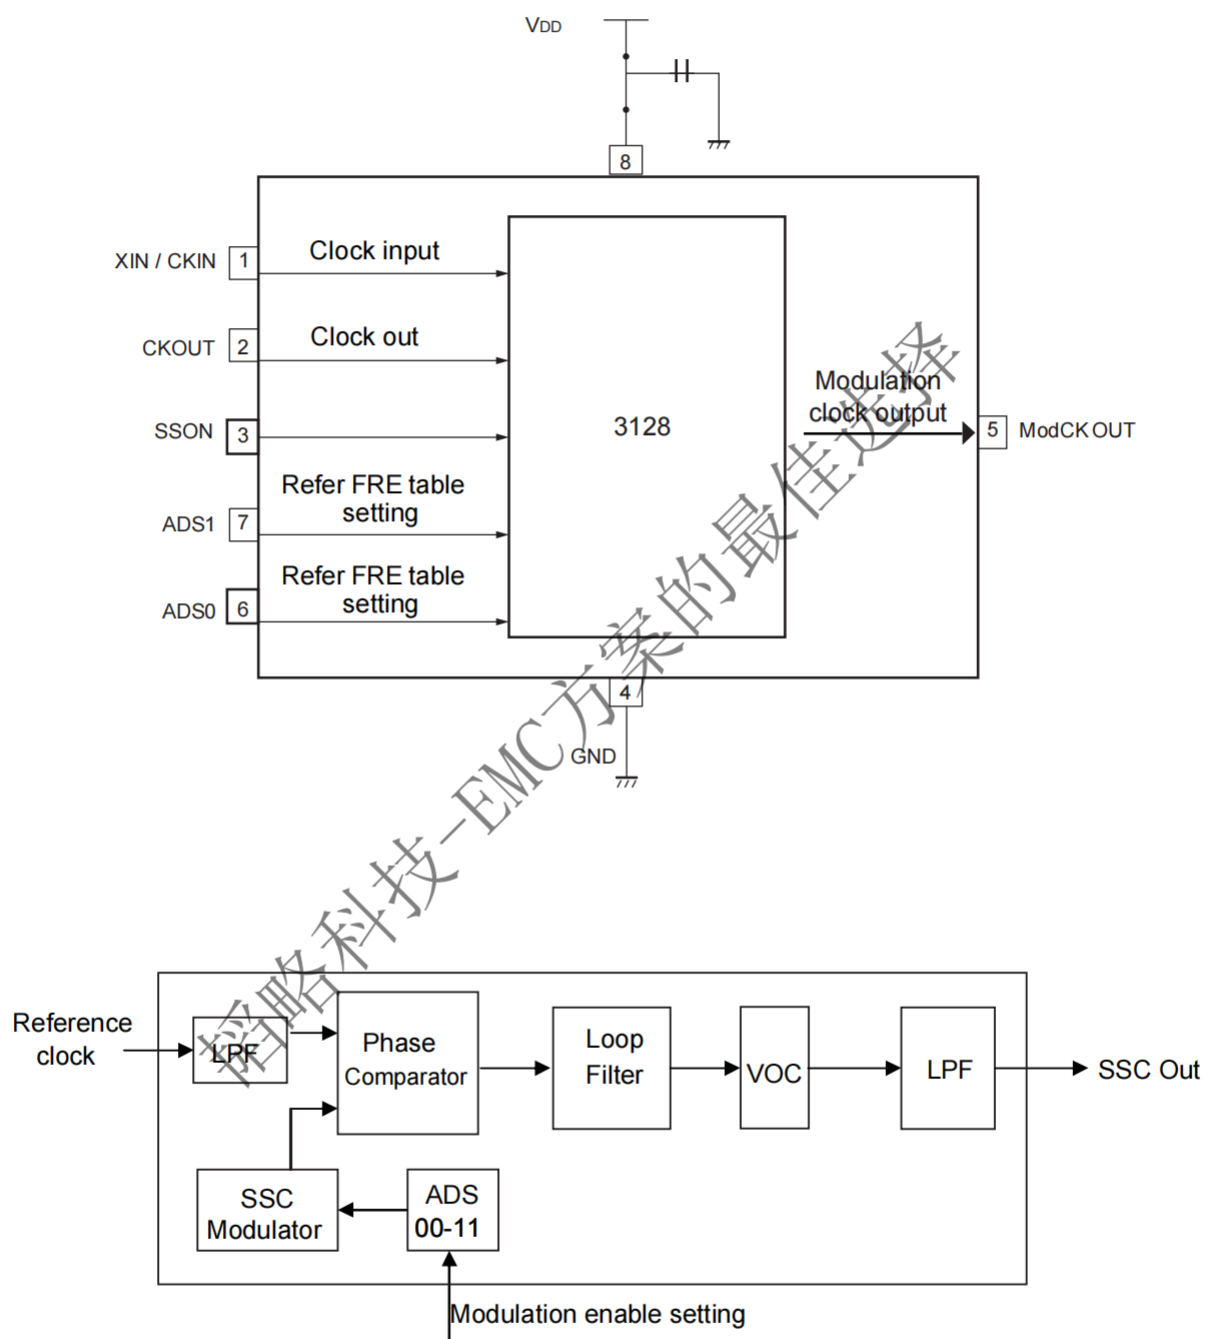

SSDCA3128AF block

PIN ASSIGNMENT

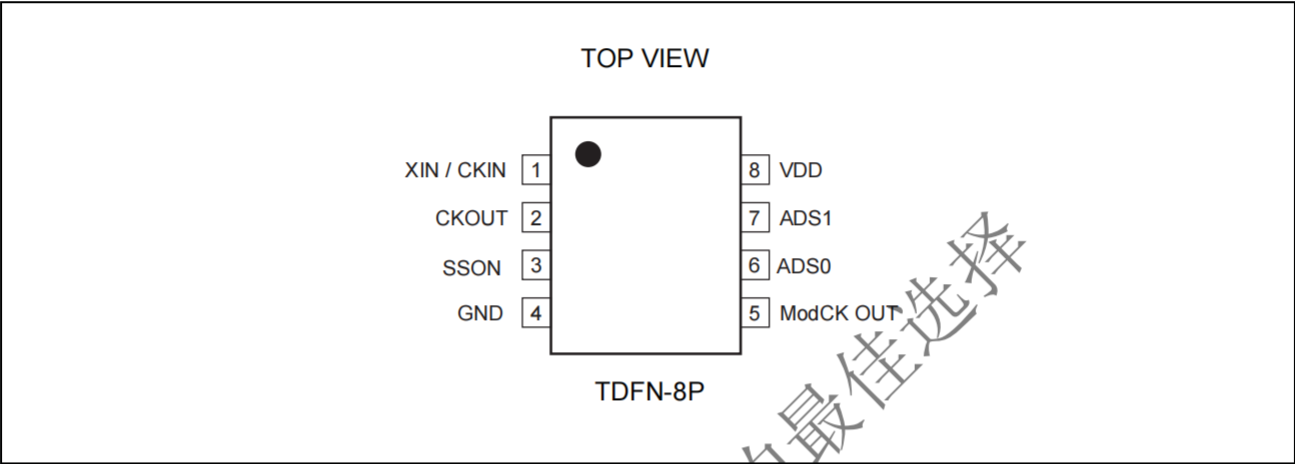

PIN DESCRIPTION

Pin name	I/O	Pin no.	Description
XIN / CKIN	I	1	Clock input pin (or External reference clock input).
CKOUT	O	2	Crystal connection(external reference, this pin should be left open)
SSON	I	3	ModCK OUT ON/OFF 1=ON 0=OFF
GND	---	4	GND pin
ModCK OUT	O	5	Modulation clock output
ADS0	I	6	Analog Spreading Range Selection(refer Functionality Table)
ADS1	I	7	Analog Spreading Range Selection(refer Functionality Table)
VDD	---	8	Power supply voltage pin


■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating		Unit
		Min	Max	
Power supply voltage*	V_{DD}	- 0.5	+ 4.5	V
Input voltage*	V_I	$V_{SS} - 0.5$	$V_{DD} + 0.5$	V
Output voltage*	V_O	$V_{SS} - 0.5$	$V_{DD} + 0.5$	V
Storage temperature	T_{ST}	- 55	+ 125	°C
Operation junction temperature	T_J	-40	+125	°C
Output current	I_O	2	4	mA
Static Discharge Voltage (As per JEDEC STD22-A114-B)	T_{DV}	—	2000	V
Overshoot	V_{IOVER}	—	$V_{DD} + 1.0$ ($t_{OVER} \leq 4ns$)	V
Undershoot	V_{IUNDER}	$V_{SS} - 1.0$ ($t_{UNDER} \leq 4ns$)	—	V

* : The parameter is based on $V_{SS} = 0.0$ V.

WARNING: Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

Overshoot/Undershoot

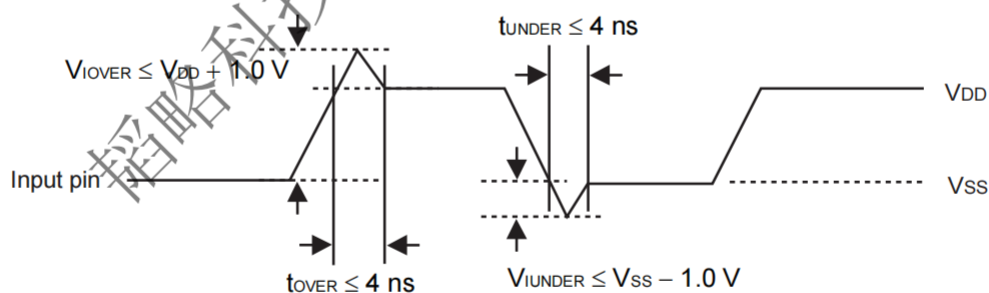

■ ELECTRICAL CHARACTERISTICS

• DC Characteristics

(Ta = -40°C to +125 °C, V_{DD} = 3.3 V ± 0.3 V, V_{SS} = 0.0 V)

Parameter	Symbol	Pin	Conditions	Value			Unit
				Min	Typ	Max	
Output voltage	V _{OH}	CKOUT	"H" level output I _{OH} = -4 mA	0.66V _{DD}	—	V _{DD}	V
	V _{OL}	CKOUT	"L" level output I _{OL} = 4 mA	V _{SS}	—	0.33V _{DD}	V
Output impedance	Z _O	CKOUT	1 MHz to 40 MHz	—	30	—	Ω
Input capacitance	C _{IN}	CKIN,	Ta = +25 °C, V _{DD} = V _I = 0.0 V, f = 1 MHz	—	—	16	pF
Load capacitance	C _L	CKOUT	1 MHz to 40 MHz	—	—	10	pF
Power supply current	I _{CC}	V _{DD}	No load capacitance at 27 MHz	—	3.0	4	mA
Power down current	I _{pd}	V _{DD}	Input clock stopping	—	4	—	μA


• AC Characteristics

(Ta = -40°C to +125 °C, V_{DD} = 3.3 V ± 0.3 V, V_{SS} = 0.0 V)


Parameter	Symbol	Pin	Conditions	Value			Unit
				Min	Typ	Max	
Input frequency	f _{in}	CKIN	—	1.0	—	40	MHz
Output frequency	f _{OUT}	CKOUT	—	1.0	—	40	MHz
Output slew rate	SR	CKOUT	Load capacitance 15 pF 0.4 V to 2.4 V	0.4	—	4.0	V/ns
Output clock duty cycle	t _{bcc}	CKOUT	1.5 V	45	—	55	%
Output Rise Time			between 20% to 80%		0.9		nS
Output Fall Time			between 80% to 20%		0.9		nS
Cycle-cycle jitter	t _{JC}	CKOUT	No load capacitance, Ta = +25 °C, V _{DD} = 3.3 V	—	—	40	ps-rms

Note : The modulation clock stabilization wait time is required after the power is turned on, the IC recovers from power saving, or after ENS (modulation ON/OFF) setting is changed. For the modulation clock stabilization wait time, assign the maximum value for lock-up time.


■ OUTPUT CLOCK DUTY CYCLE ($t_{DCC} = t_b/t_a$)

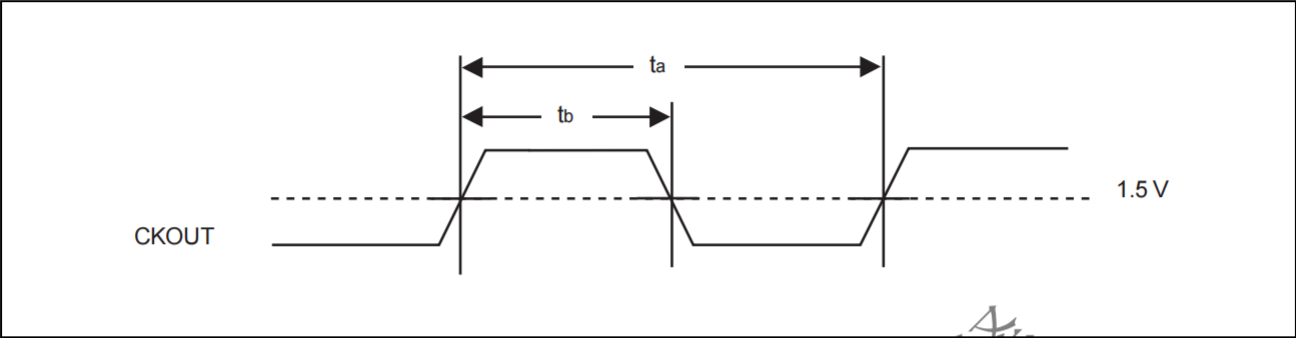

■ INPUT FREQUENCY ($f_{in} = 1/t_{in}$)

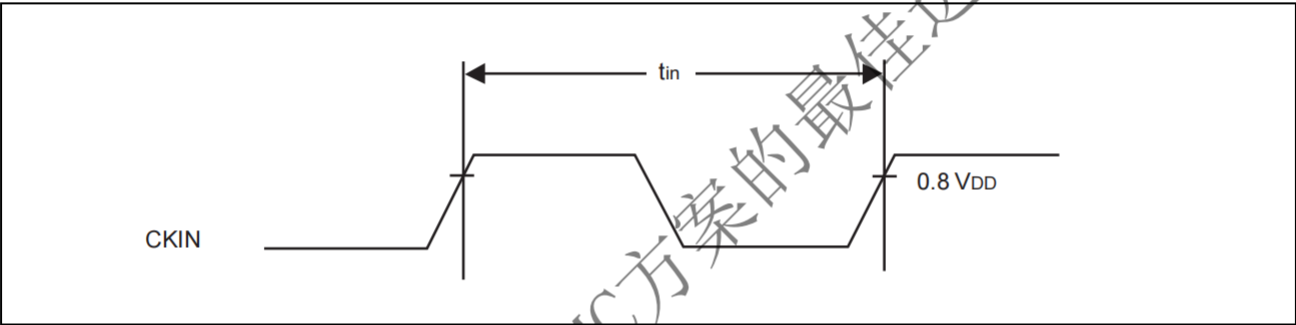

■ OUTPUT SLEW RATE (SR)

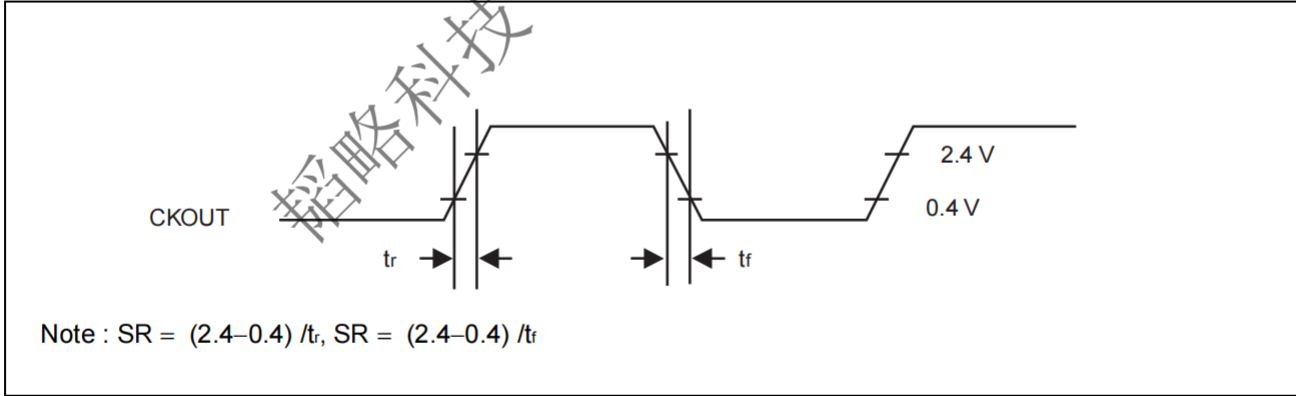


Functional Table

Vdd(V)	Freq. Range	Freq(MHz)	Spreading Range (%)							
			ADS1	ADS0	ADS1	ADS0	ADS1	ADS0	ADS1	ADS0
			0	0	0	1	1	0	1	1
3.3	1~40	12	± 0.06		± 0.12		± 0.18		± 0.22	
		24	± 0.10		± 0.19		± 0.26		± 0.32	
		27	± 0.12		± 0.23		± 0.31		± 0.37	
		32	± 0.11		± 0.23		± 0.29		± 0.33	


Note: Frequency Spreading Range can vary over voltage and temperature by 5%

- Center spread

Spectrum is spread (modulated) by centering on the input frequency.

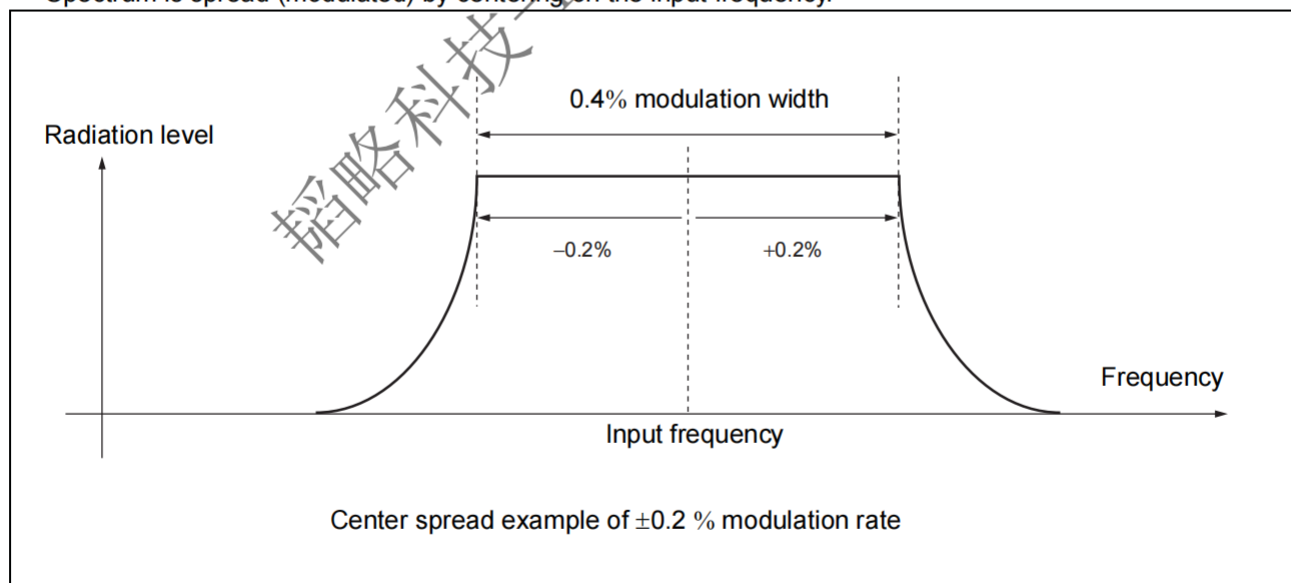

- Diagram of CLK spread

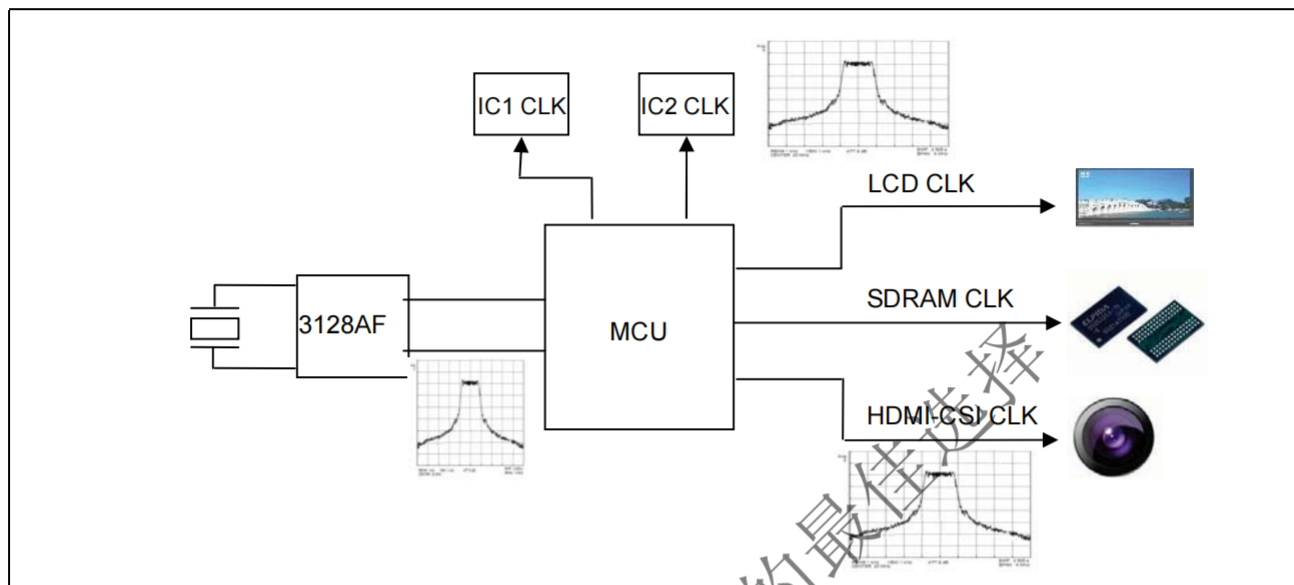

XXXX → 304X: Specific Device Code
 YWWA → Y: Year
 WW: Work Week
 A: Assembly House

Technical drawing of a VDFN/WDFN package showing top, side, and cross-sectional views with dimensions and labels.

Top View: Shows a rectangular package with dimensions D (width) and E (length). Pin 1 is at the bottom right corner. Pin 5 is at the top left corner. Pin 8 is at the top right corner. Pin 4 is at the bottom left corner. The distance between the centerlines of the pins is $D2$. The distance from the top edge to the centerline of the pins is K . The distance from the bottom edge to the centerline of the pins is L . The distance from the side edge to the centerline of the pins is $E2$.

Side View: Shows the package profile with dimensions A (height) and $A1$ (height of the seating plane). The distance from the bottom edge to the centerline of the pins is L . The distance from the side edge to the centerline of the pins is $E2$.

Cross-sectional View: Shows the internal structure of the package. The distance from the bottom edge to the centerline of the pins is L . The distance from the side edge to the centerline of the pins is $E2$. The distance from the bottom edge to the centerline of the pins is L . The distance from the side edge to the centerline of the pins is $E2$.

Labels: VDFN/WDFN, C0.25X45° (Pad Size : 43X71MIL), 0.08 MAX. C SEATING PLANE.

JEDEC OUTLINE	MO-229		
PKG CODE	WDFN		
SYMBOLS	MIN.	NOM.	MAX.
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A3	0.203 REF.		
b	0.20	0.25	0.30
D	1.95	2.00	2.05
E	1.95	2.00	2.05
e	.5 BSC		
K	0.20		

	D2			E2			L			LEAD FINISH		JEOEC CODE	VDFN	WDFN
PAD SIZE	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	Pure	PPF			
43"×71" MIL	1.55	1.60	1.65	0.85	0.90	0.95	0.25	0.30	0.35	V	X	N/A	V	V

Figure 1: Dimensions of the package. The diagram shows a top and side view of a package with dimensions in inches. The top view shows a 0.50 PITCH between pins, a 0.35 inch offset, and a 0.5 inch width. The side view shows a 2.30 inch height and a 0.5 inch offset.

Ordering Code

Part Number	Package	Temperature
SSDCA3128AF-08-CT	8- pin 2-mm TDFN COL - TAPE & REEL, Green	-40°C to +125 °C

Device Ordering Information

