


(POWER BOARD)

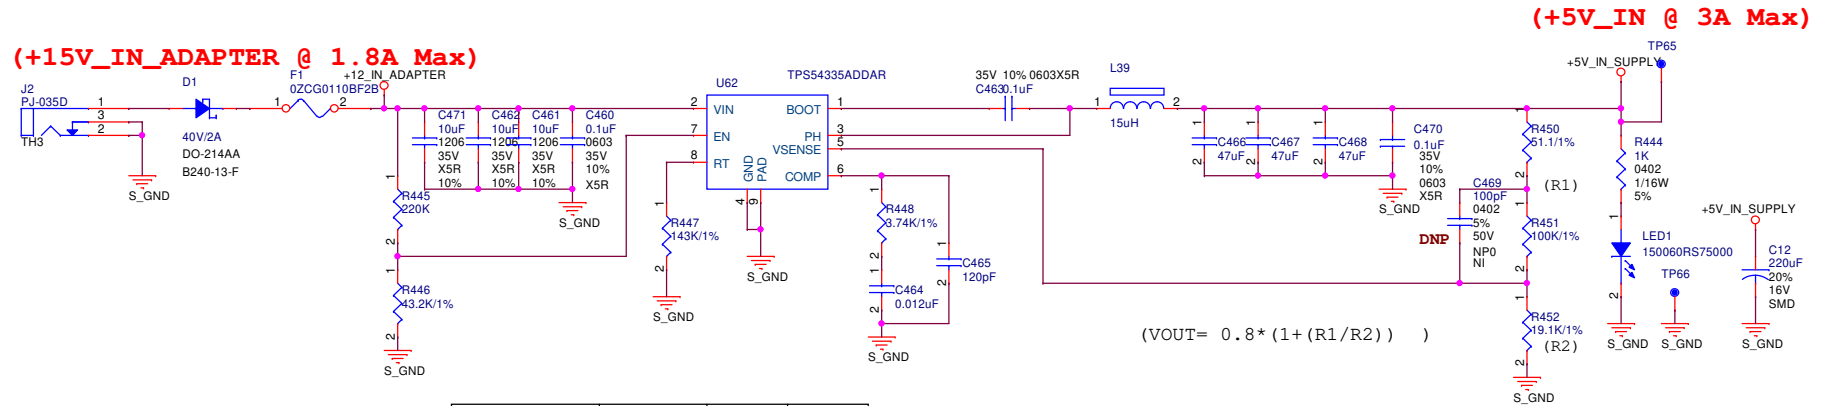

Rosc (R447)	143K Ohm		
Switching Freq	340Khz (*)		

Change note with Rev A

- 1- Remove 3.3 volt from main board, add 3.3volt LDO and 1.8 volt LDO
- 3- Swap net 5Volt at J48
- 4- Jack detection by hardware
- 5- J8 must change for big cable

6- Change FFC connector J48 for easy plugin??

S_GND : ground for digital power

D_GND : ground for analog power of cordec and amplifier

Qorvo Proprietary & Confidential

Title: <Title>				
B V-xxxx-xxxx				
Size	Document Number Sunday, August 19, 2018	Engineer:	Drawn By: 3	Rev A
Date:	Sheet of			

