



Read back the configuration register

incorrect

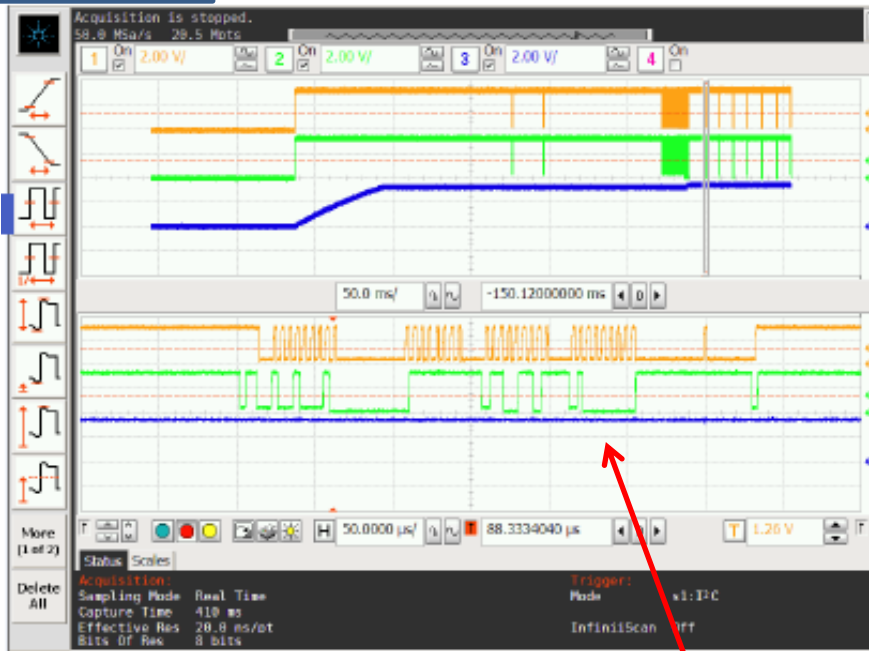

correct

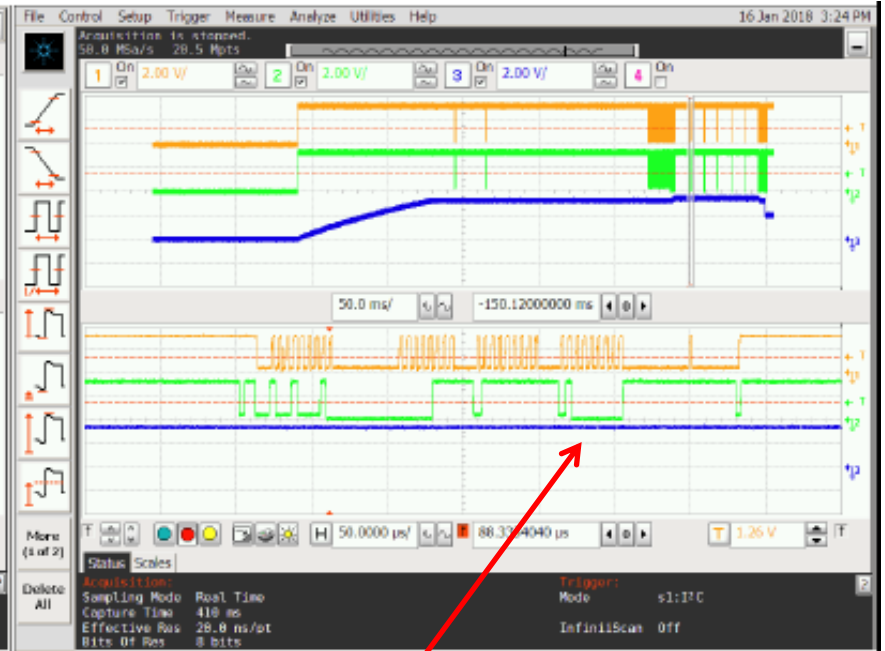

configuration register is 80h whether it is correct or not

(I2C transaction without toggling)
The result is not change from with toggling.

correct



incorrect

