



NG : conversion not start

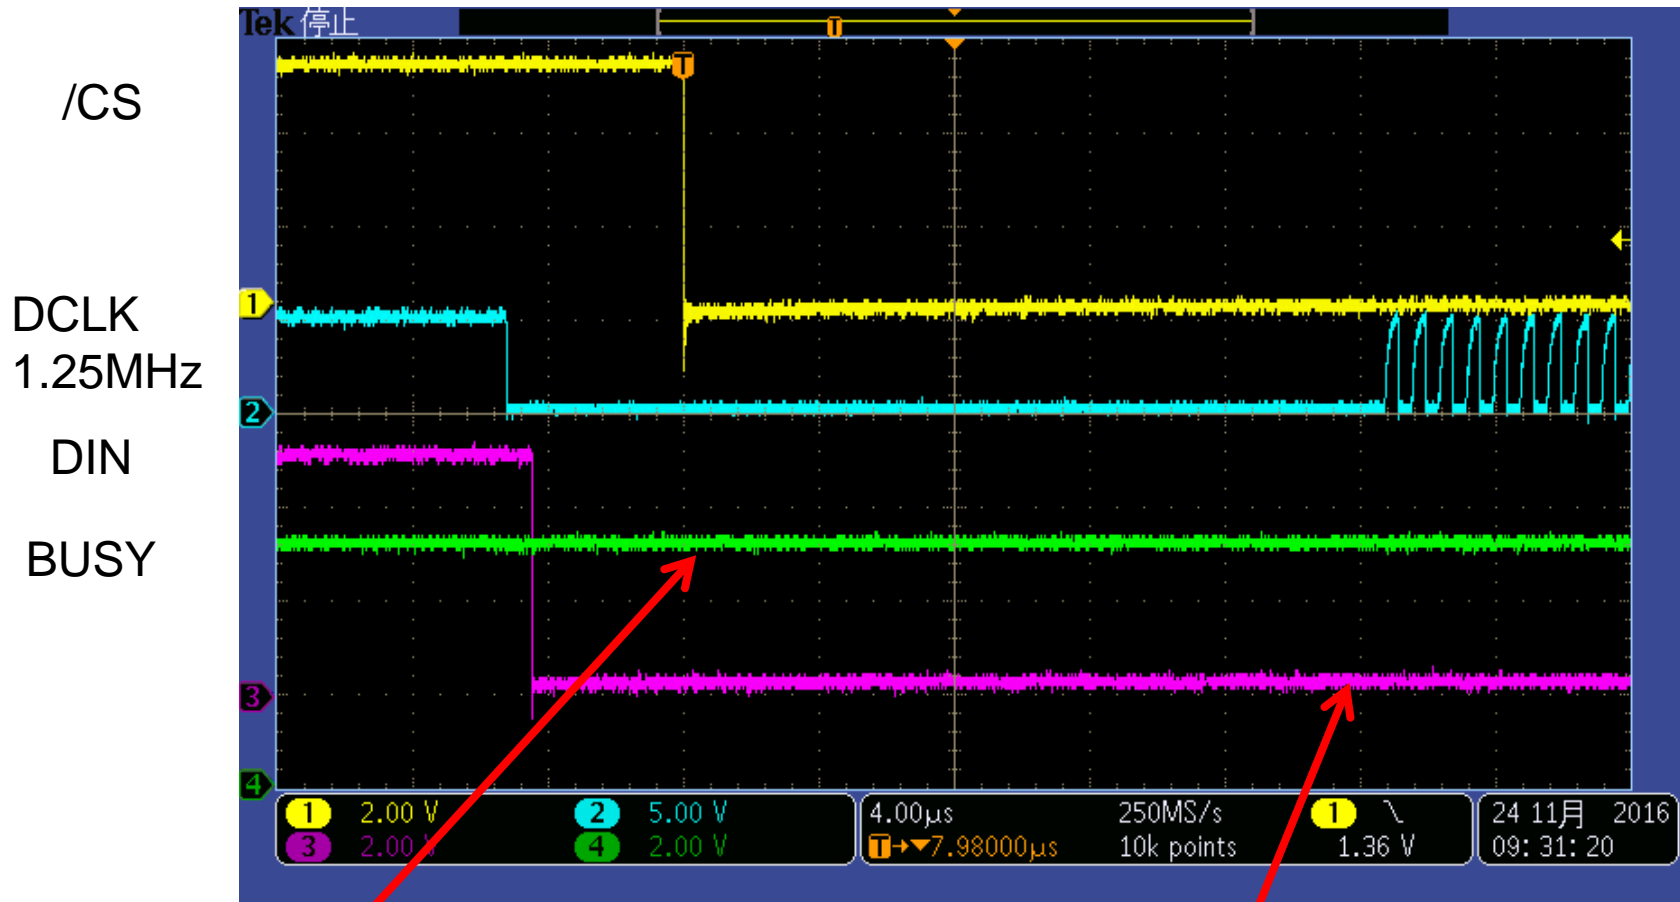

BUSY remain High


It is OK. This is the customer's spec.  
The customer watch the falling edge of the BUSY signal. If the BUSY remain High, they do not start DIN.

OK : conversion start

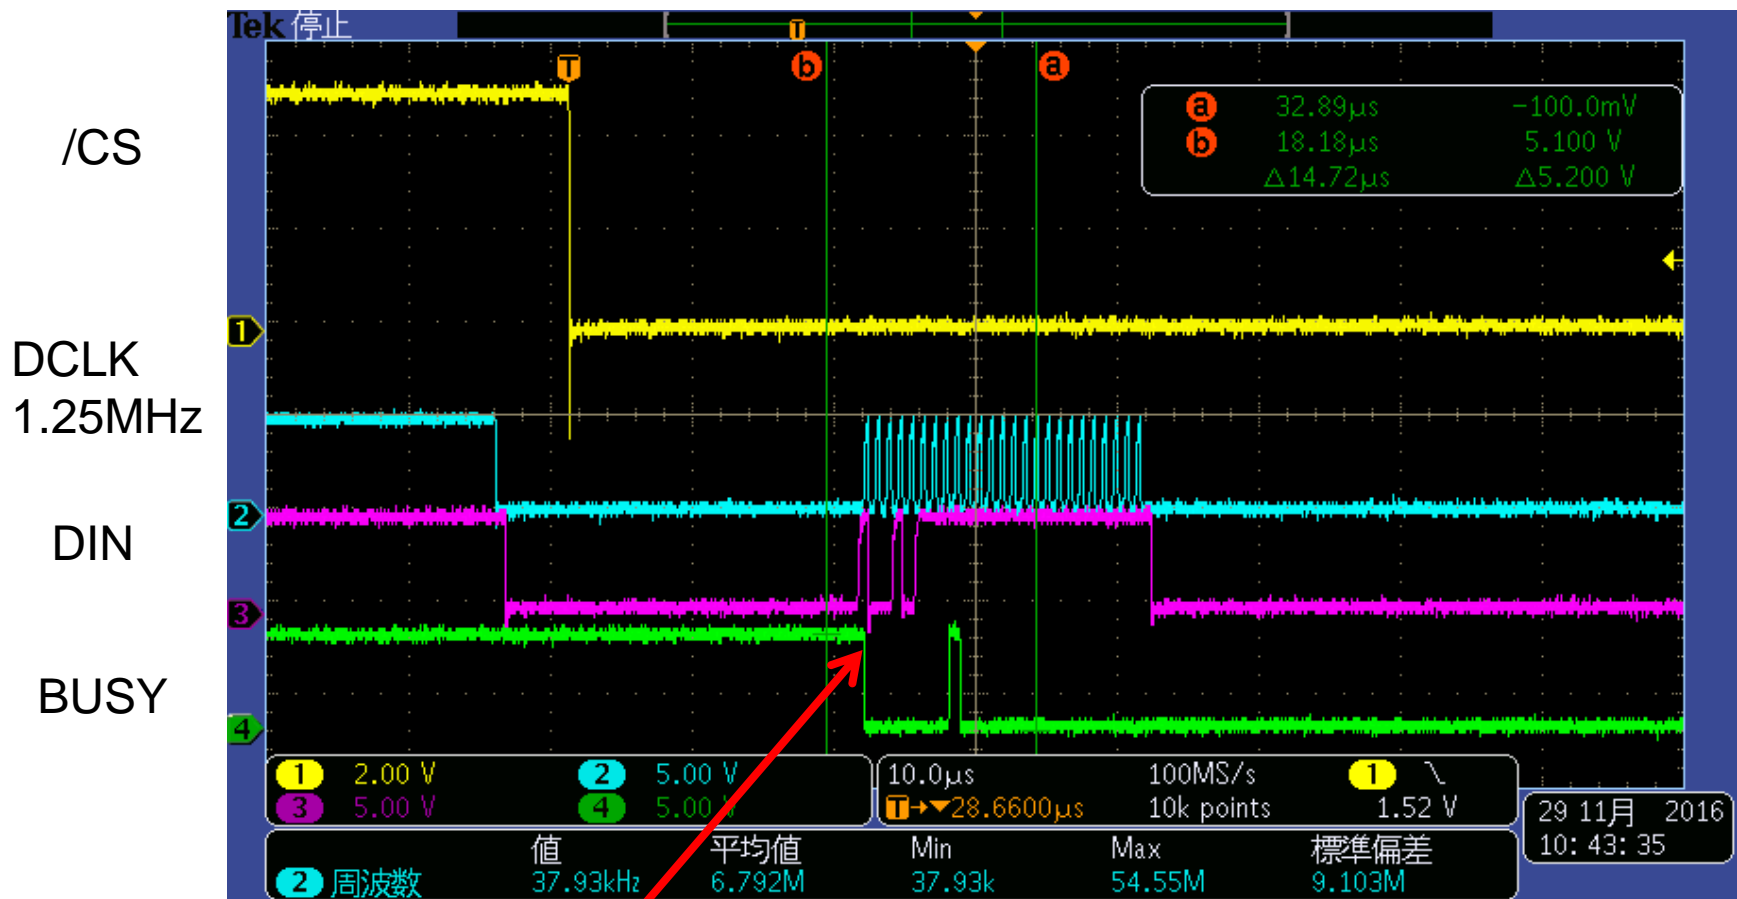

BUSY High to Low at the DIN first pulse  
Is this a correct spec?

OK : but the DOUT output a some signal

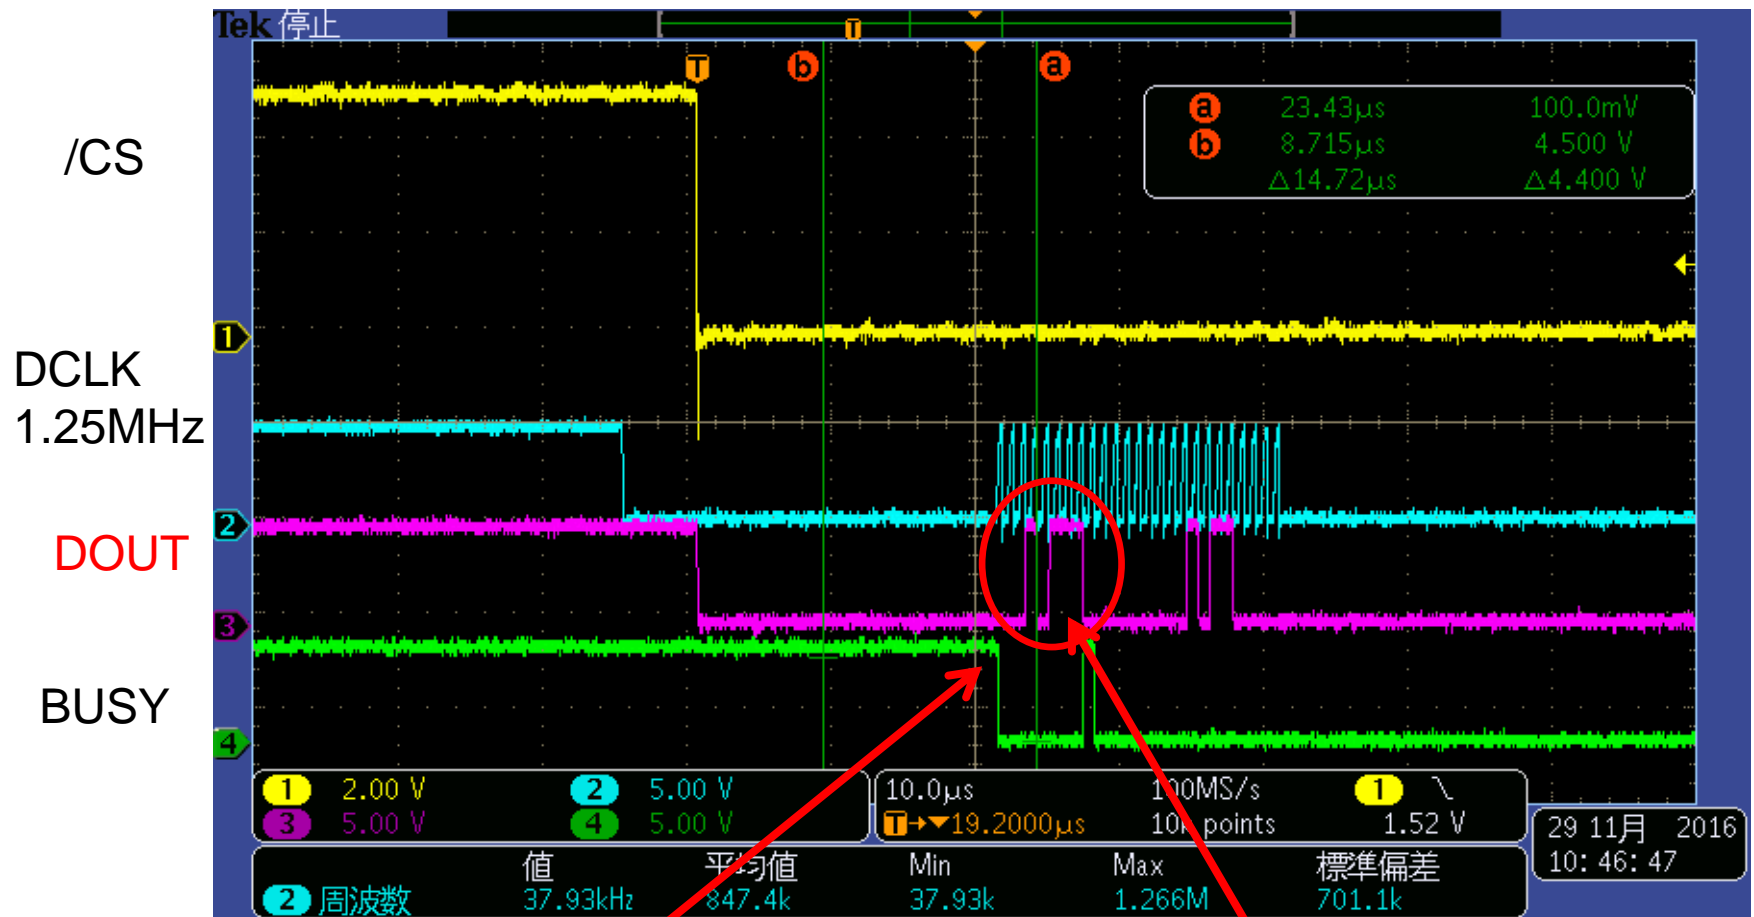

BUSY High to Low at the DIN first pulse

Why dose the DOUT output signal?