

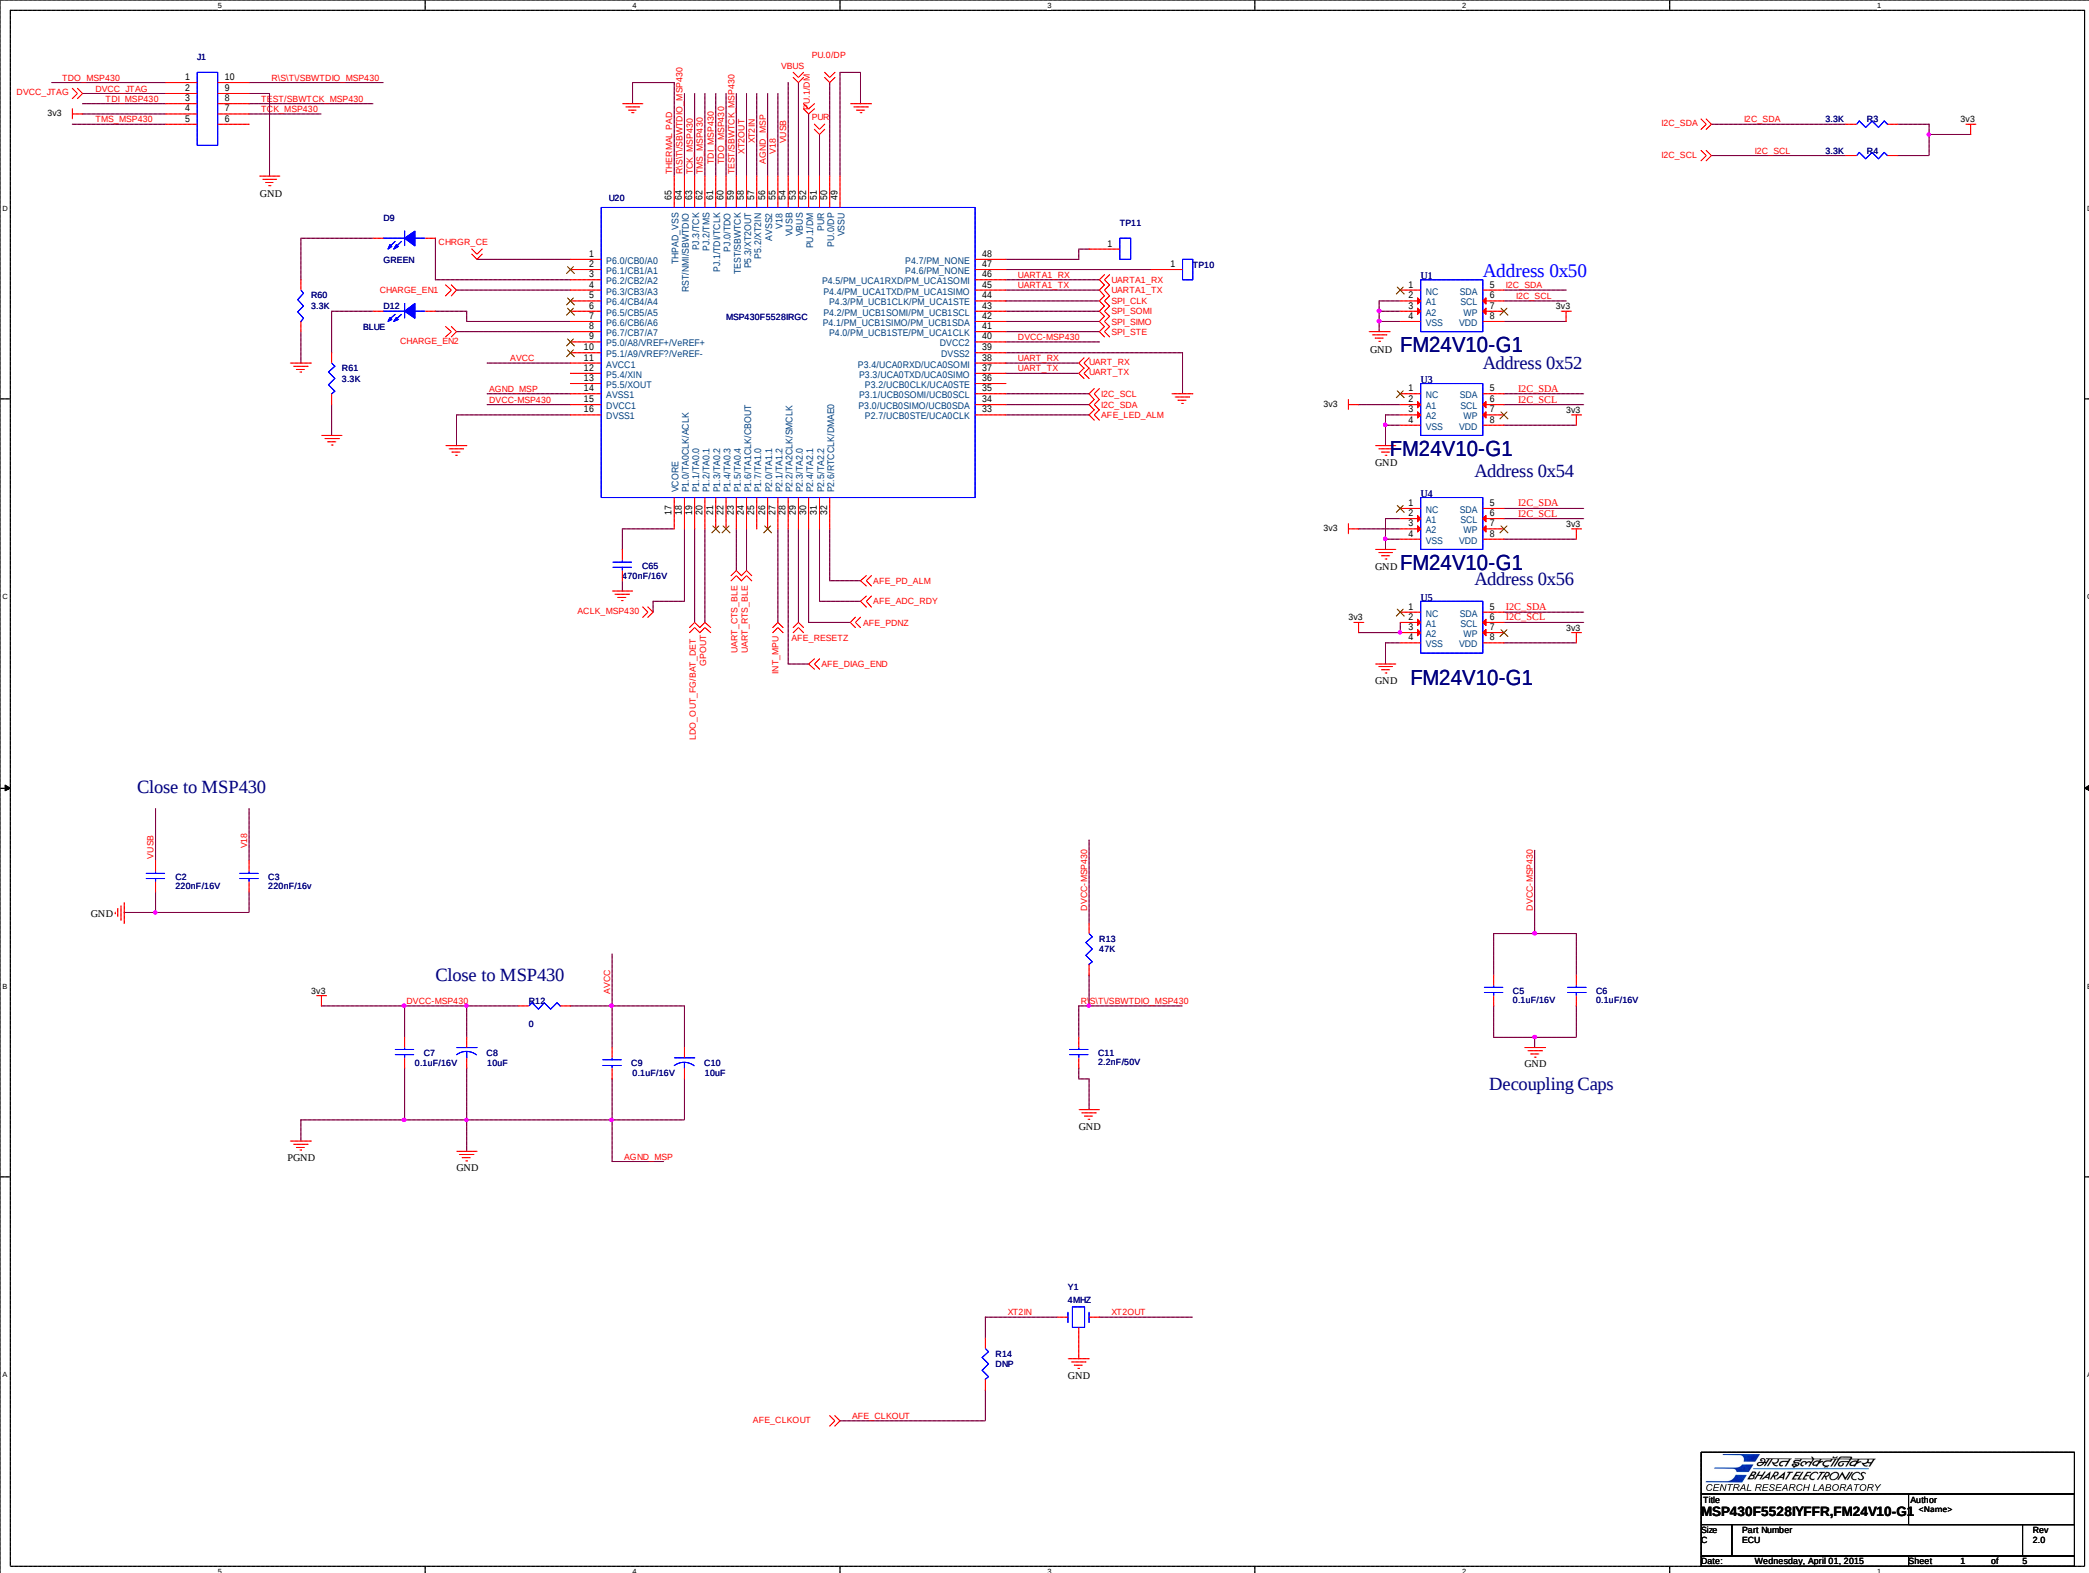



INN and INP must be guarded with VCM_shield signal. Run the VCM_shield signal to the connectors J2 and J6 and back to the device.

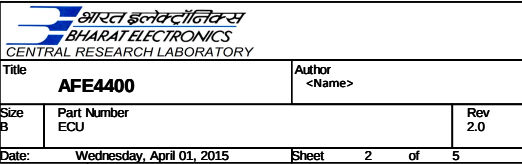


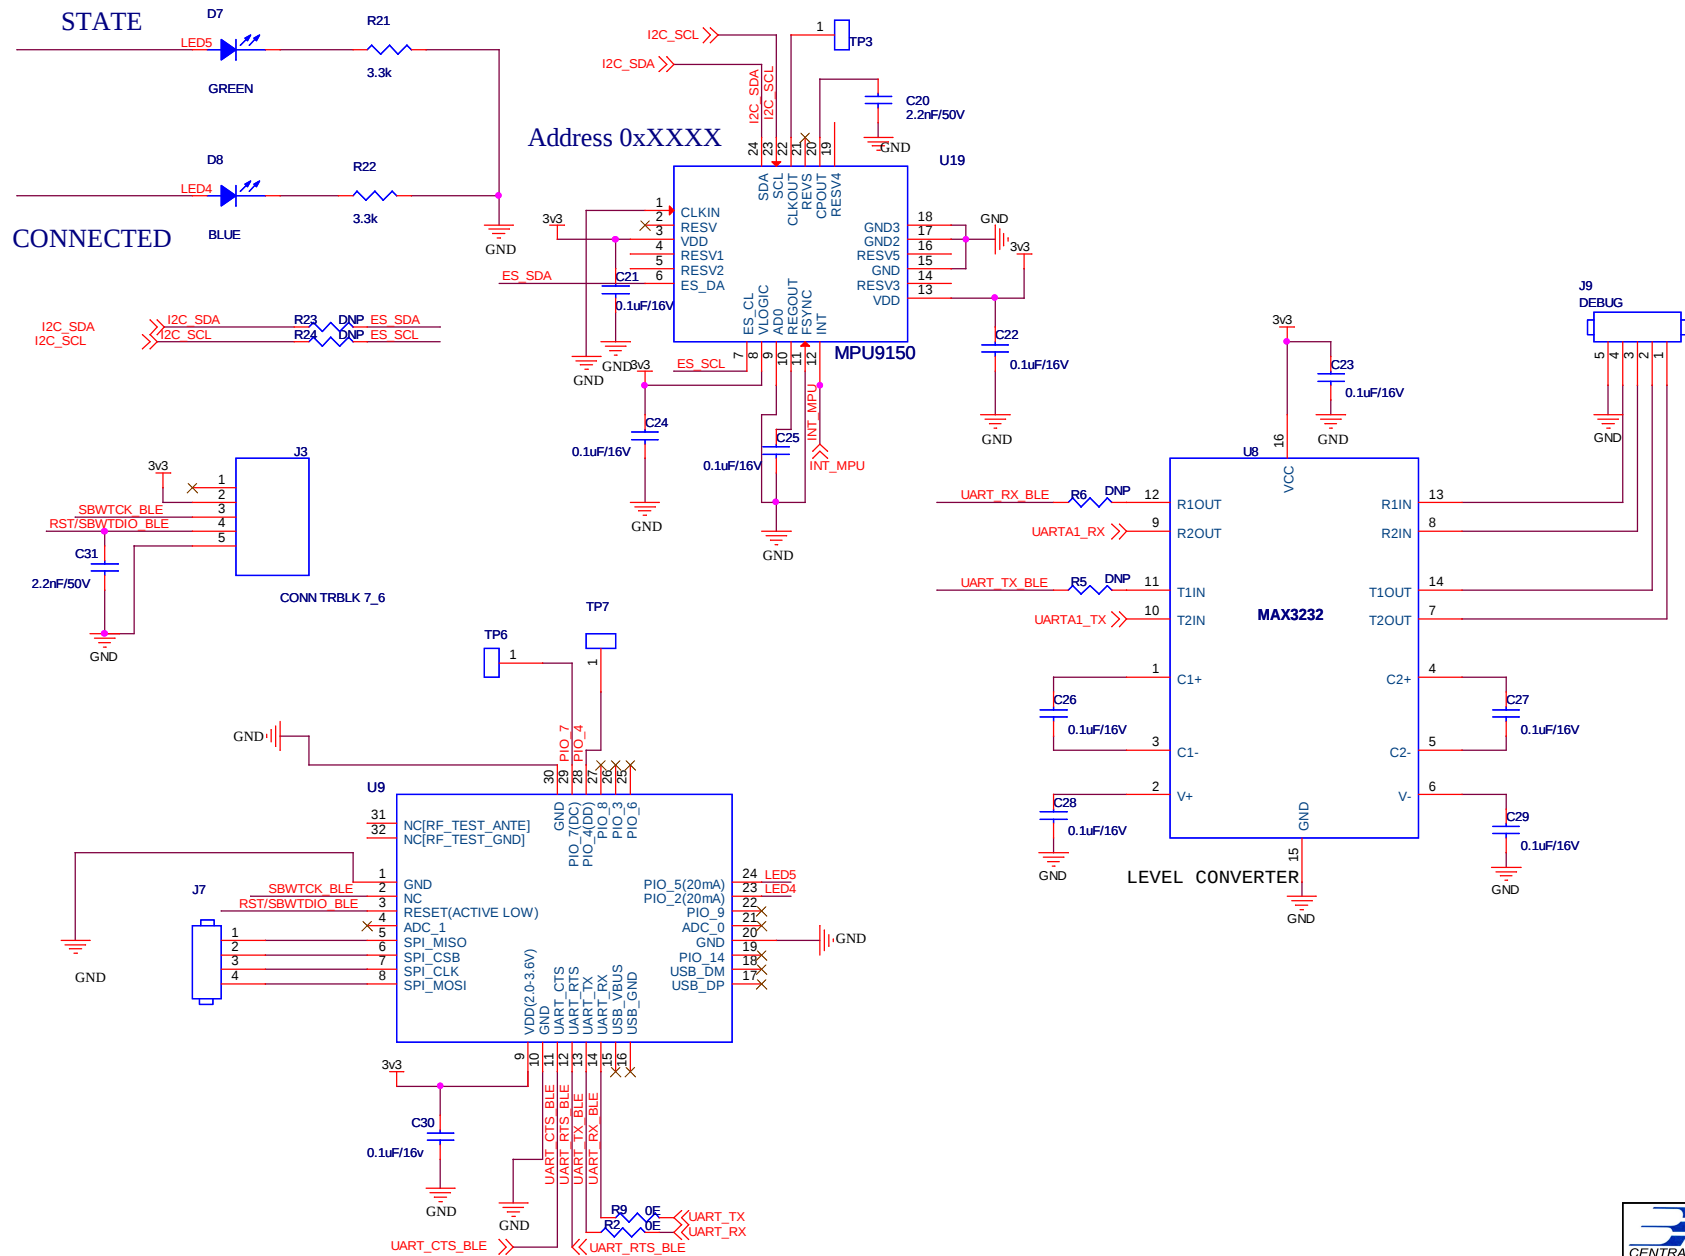


BT/BLE MODULE SPY-BY-WIRE BRLE40S2A



 भारत इलेक्ट्रॉनिक्स BHARAT ELECTRONICS CENTRAL RESEARCH LABORATORY		
Title MAX3232,BRLE40S2A,MPU9150		Author <Name>
Size B	Part Number ECU	Rev 2.0
Date:	Wednesday, April 01, 2015	Sheet 3 of 5

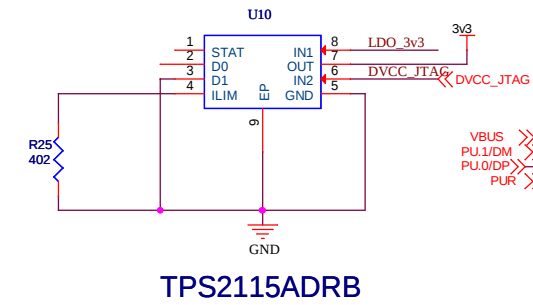

V_CHRGR_OUT >> V_CHRGR_OUT

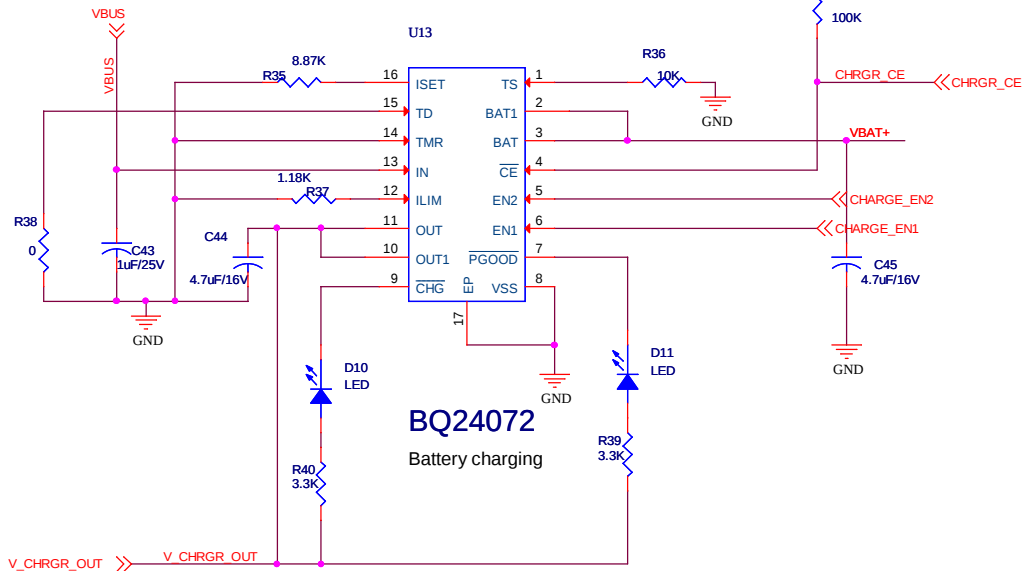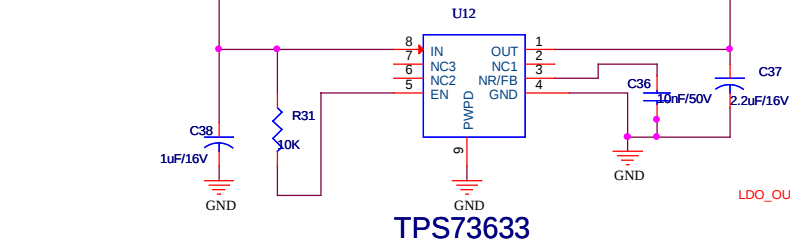


TPD2E001DZDR

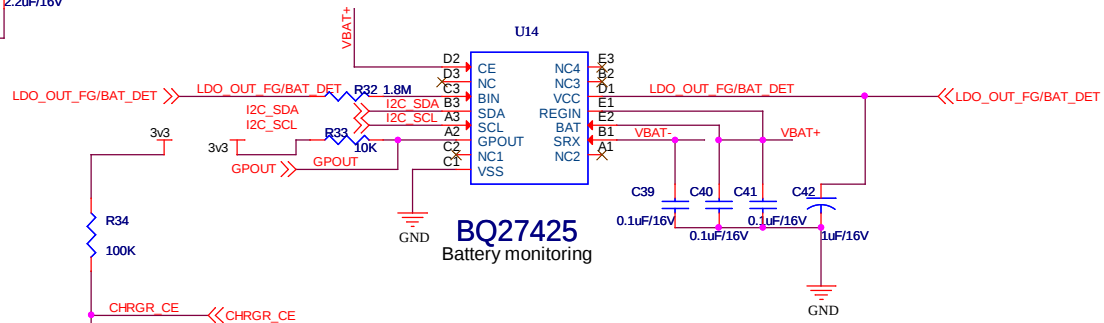


भारत इलेक्ट्रॉनिक्स BHARAT ELECTRONICS CENTRAL RESEARCH LABORATORY		
Title		Author
BQ24072, BQ27425, TPS73633, TPD2E001DZDR		
Size	Part Number	Rev
B	ECU	2.0
Date:	Wednesday, April 01, 2015	Sheet 4 of 5


FROM BATTERY CHARGING bq24072

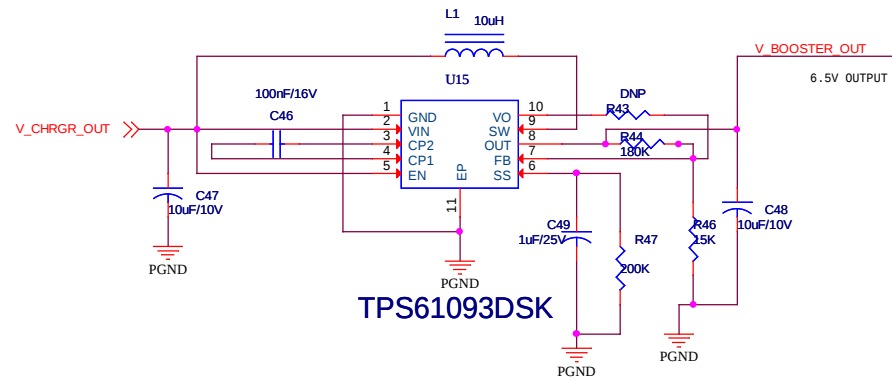

TPS61093DSK

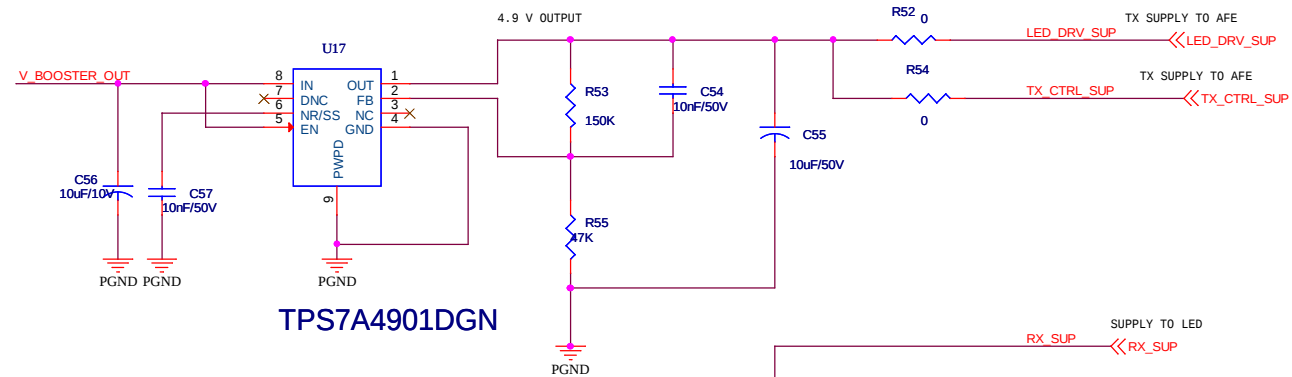

TPS7A4901DGN

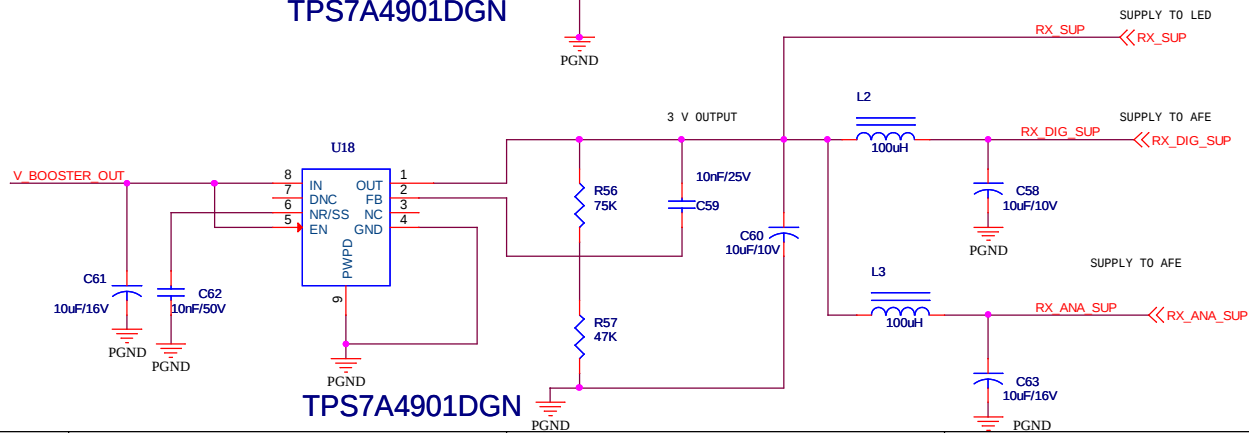

TPS7A4901DGN

भारत इलेक्ट्रॉनिक्स BHARAT ELECTRONICS CENTRAL RESEARCH LABORATORY			
Title		Author	
TPS7A4901,UC3833,TPS61093DSK		<Name>	
Size	Part Number	Rev	
B	ECU	2.0	
Date:	Wednesday, April 01, 2015	Sheet	5 of 5

This document was created with Win2PDF available at <http://www.win2pdf.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.
This page will not be added after purchasing Win2PDF.