



RGMII transmission waveform check (between MAC and PHY)


1Gbps **GOOD**

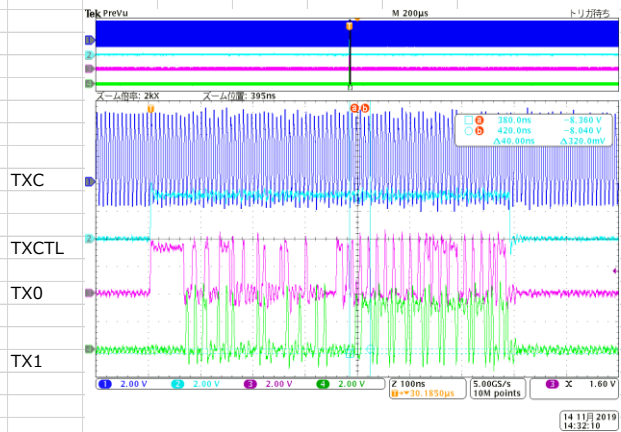

100Mbps **GOOD**

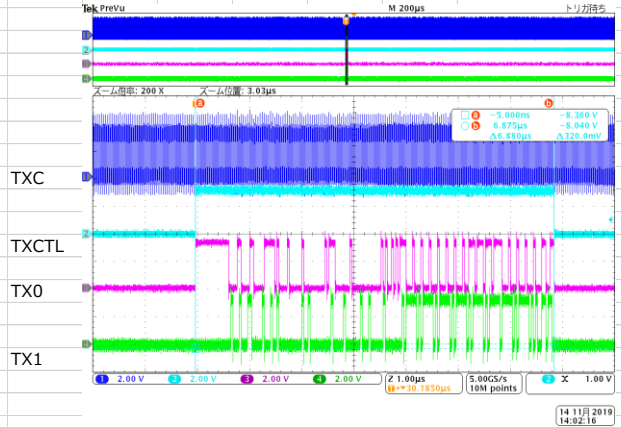


10Mbps **No Good**

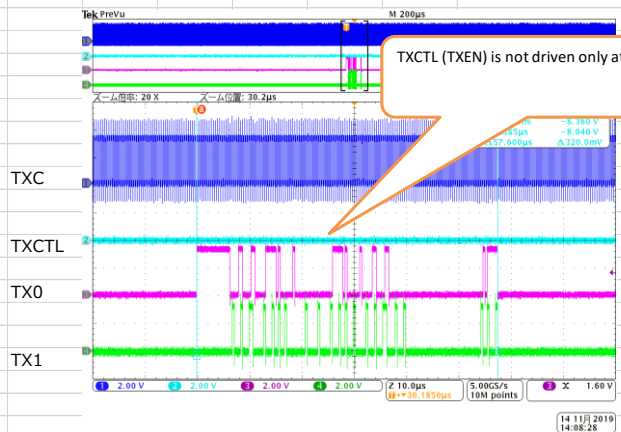


24.12.2.3 RGMII Interface

Figure 24-211 shows a device with integrated CPSW and MDIO interfaced via a RGMII connection in a typical system. The individual CPSW and MDIO signals for the RGMII interface are summarized in Table 24-1398.

Figure 24-211. RGMII Interface Typical Application

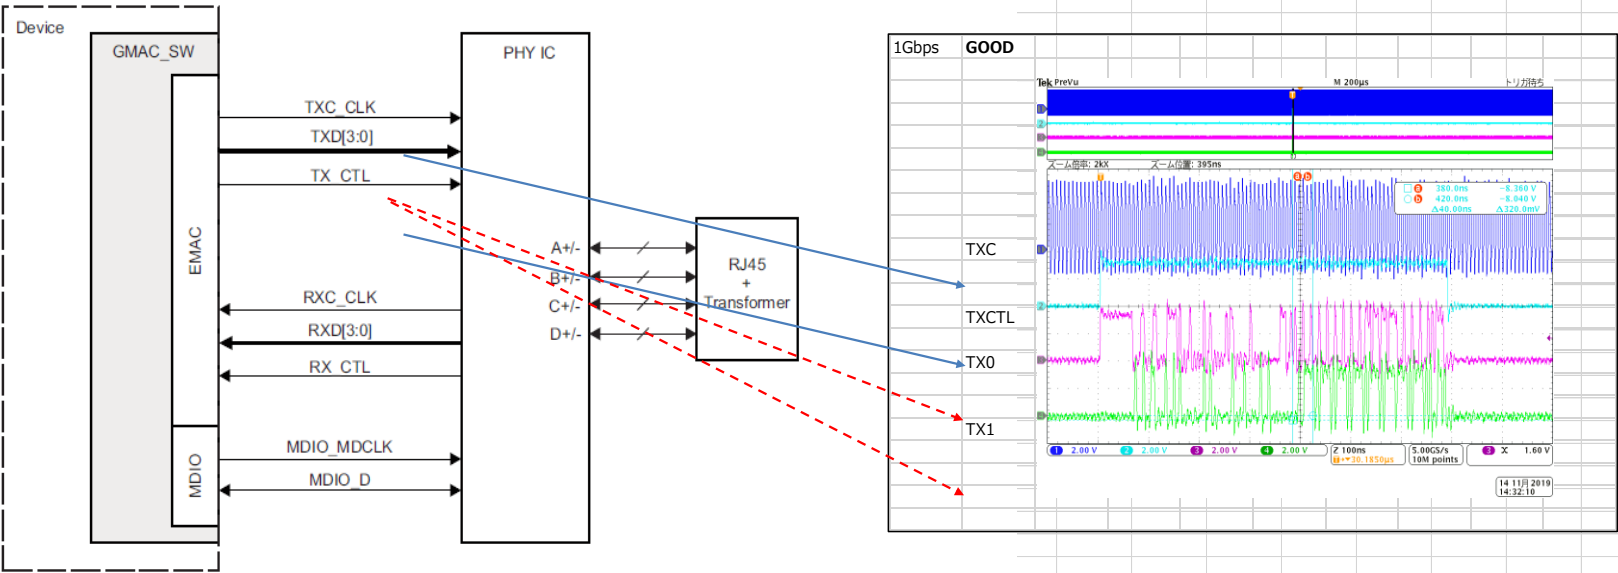

1Gbps **GOOD**

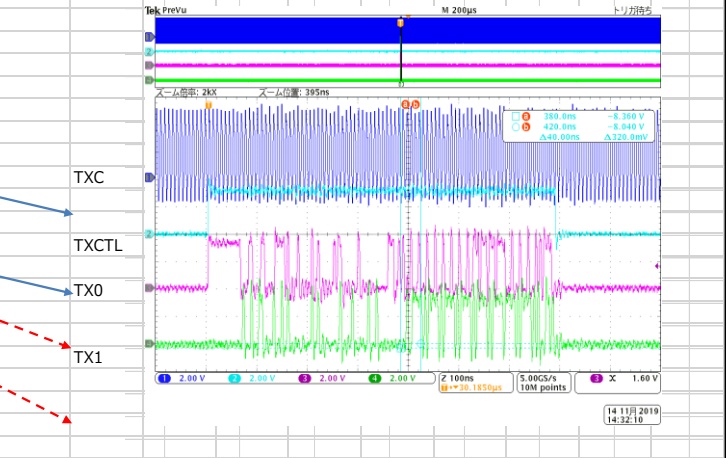

TXC_CLK -> TXC
TXD[0:1] -> TX0/TX1
TX_CTL->TXCTL