

## Board Porting\Bring up using Processor SDK RTOS for AM335x

Processor SDK RTOS component known as board library consolidates all the board-specific information so that all the modifications made when moving to a new custom platform using the SOC can be made in the source of this library.

There are three different components in PRSDK that help in porting and bring up of a custom board:

- Board library updates
  - a. PLL Clocking and PRCM
  - b. Pin mux Update
  - c. DDR Configuration
  - d. Peripheral instances updates
- Diagnostics tests
- Boot loader updates

## Board Library Updates in Processor SDK RTOS:

### PLL Clocking

There are two places where the device PLL configurations are performed when using Processor SDK RTOS and CCS.

#### Debug environment:

Debug environment refers to development setup where code is debugged using JTAG emulator on the SOC. The PRSDK software relies on the GEL file that is part of the target configuration to setup the clocks and the DDR for the device. The CCS GEL file for AM335x platforms is located in the CCS package at the location `ccsv7\ccs_base\emulation\boards\<<boardName>`

For example for beagle bone black, the files can be found at `ccsv7\ccs_base\emulation\boards\beaglebone\gel`

The GEL is the first piece of software that should be brought up on a custom board.

#### Production environment:

Production environment refers to the setup when the base application is booted from a boot media like a flash memory or host interface. In this environment, the bootloader sets performs all the SOC and board initialization and copies the application from flash memory to the device memory.

The clock setup in the bootloader code can be located at `pdk_am335x_x_x_x\packages\ti\starterware\bootloader\src\am335x`

Users can choose to use the platform clocking similar to one of TI reference platforms or can modify them as per their application requirements. By default the PLL settings are setup for OPP\_NOM settings (MPU= 600 MHz.)

TI provides [Clock Tree tool](#) to allow users to simulate the clocking on the SOC. For quick reference of the multiplier and divider settings to change the PLL setting is provided in the spreadsheet AM335x\_DPLL\_CALCv3.xlsx.

After modifying the clocking in the bootloader, users need to rebuild the bootloader using instructions provided in [Processor SDK RTOS BOOT AM335x/AM437x](#)

### PRCM Modules Enable:

PRCM Module Enable is required to turn on the power domain and the clocking to each of the modules on the SOC. The PRCM Enable calls to enable each module are made from the function Board\_moduleClockInit which is found in the location.

pdk\_am335x\_1\_0\_9\packages\ti\board\src\bbbAM335x\bbbAM335x.c

Check every instance and peripheral required in the application platform and enable the module in the board library.

For example to use three UARTs 0, 1 and 4, ensure that you have the following code as part of the board library setup:


```
/* UART */
```

```
status = PRCMModuleEnable(CHIPDB_MOD_ID_UART, 0U, 0U);  
status = PRCMModuleEnable(CHIPDB_MOD_ID_UART, 1U, 0U);  
status = PRCMModuleEnable(CHIPDB_MOD_ID_UART, 4U, 0U);
```


**Note:** PRCMEnable function is defined in pdk\_am335x\_1\_0\_9\packages\ti\starterware\soc\am335x

### Pinmux updates in the Board library:

**Generating a New PinMux Configuration Using the PinMux Utility:** This procedure uses the [cloud-based pinmux utility](#)

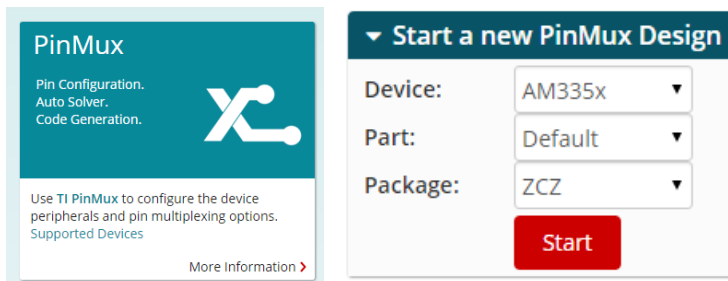

Navigate to  $\{\text{PDK\_INSTALL\_DIR}\}\backslash\text{packages}\backslash\text{ti}\backslash\text{starterware}\backslash\text{tools}\backslash\text{pinmux\_config}\backslash\text{am335x}$  and Load `beaglebone_black_config`

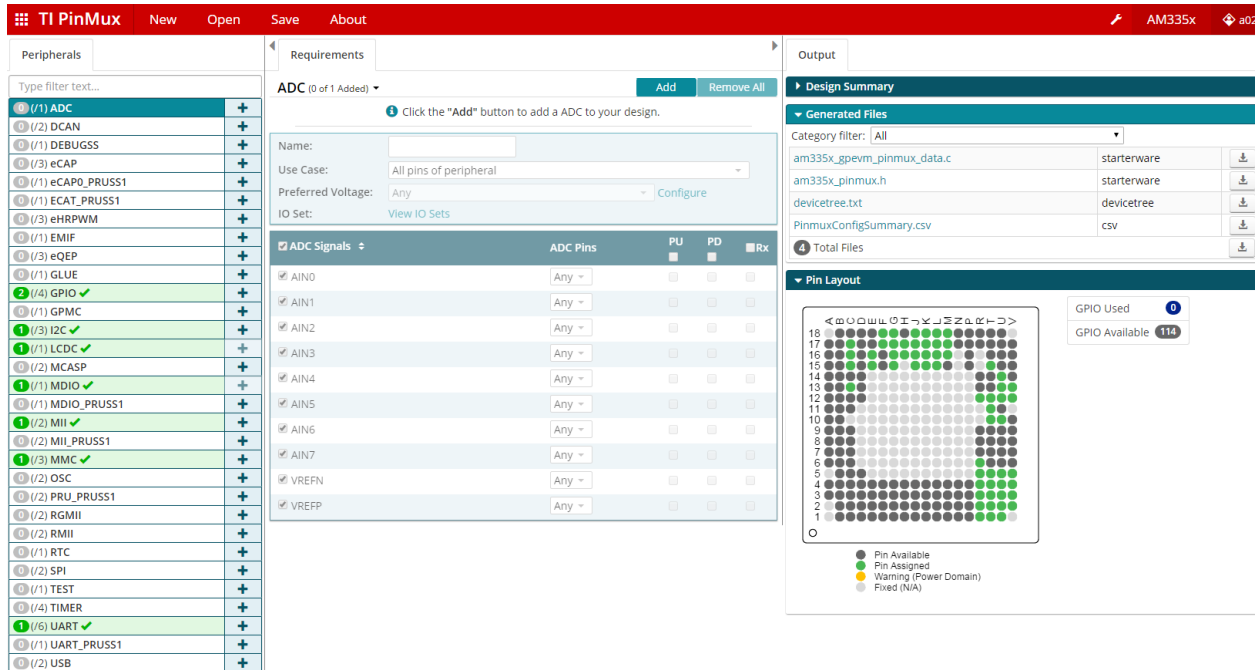

Add and remove peripheral instances and select the appropriate use cases required for development based on the application platform requirements and resolve all conflicts.

Refer [Pin Mux Utility for ARM MPU Processors](#)

### Post Processing steps:

1. Change the Category filter to `starterware` and download the pinmux files `am335x_pinmux.h` and `am335x_pinmux_data.c`
2. At the bottom of `am335x_pinmux.h` change `extern pinmuxBoardCfg_t gAM335xPinmuxData[];` to `extern pinmuxBoardCfg_t gBbbPinmuxData[];`
3. Change `am335x_pinmux_data.c` to `am335x_beagleboneblack_pinmux_data.c`.
4. Change `gAM335xPinmuxData` to `gBbbPinmuxData` at the end of the file in file
5. `am335x_beagleboneblack_pinmux_data.c`.

Replace the existing files with the new files and rebuild the board library using the instructions in the section [Rebuilding board Library in Processor SDK RTOS:](#)

### Updating DDR settings:

Similar to clock and PLL settings, DDR initialization is configured in the Debug environment through GEL files and in production environment using bootloader source files.

TI provides [AM335x EMIF Configuration tips](#) which contains a spreadsheet to enter the timing from the DDR datasheet to compute the EMIF timing number required to initialize DDR.

We strongly recommend changing the value and testing using GEL files before using them in the bootloader software. For Sanity test, you can perform read/write tests using CCS Memory Browser or run the diagnostic memory read/write test that we provide in diagnostics package here:

```
PDK_INSTALL_PATH\packages\ti\board\diag\mem
```

Once the DDR timings have been confirmed, you can use the settings in the file:

```
PDK_INSTALL_PATH \packages\ti\starterware\bootloader\src\am335x\sbl_am335x_platform_dds.c
```

## Peripheral initialization:

The board library is responsible for most of the SOC initialization but it also setup some board level components such as ethernet PHY and debug UART and I2C for reading board ID from EEPROM. All of the other peripheral instances and initialization needs to be done from the application level.

For example for beagleboneblack, the peripheral initialization are performed from the source file `pdk_am335x_1_0_9\packages\ti\board\src\bbbAM335x\bbbAM335x_ild_init.c`

The debug UART instance, I2C Addresses are set using the file `board_cfg.h` found under:

```
pdk_am335x_1_0_9\packages\ti\board\src\bbbAM335x\include
```

Default UART instance is set to 0 in the board library. The Board initialization will configure the UART instance 0 to send binary log data to serial console using the `Board_UARTInit` function. If you wish to use more UART instances then we recommend linking in the UART driver in the application and using `UART_open()` and `UART_stdioInit` API calls from the application.

Each peripheral driver in the Processor SDK RTOS has a SOC configuration that provides the interrupt numbers, base address, EDMA channels which can be updated using the file `<peripheral>_soc.c` file. This is used as default setup for initializing the driver instance. It can be overridden from the application using `peripheral_getSOCInitCfg()` and `peripheral_setSOCInitCfg()`

For Example: All instances of UART for AM335x have been mapped in the file

```
pdk_am335x_1_0_9\packages\ti\drv\uart\soc\am335x\UART_soc.c
```

System integrators need to ensure that no interrupt numbers and EDMA resource conflicts exist in the SOC configuration for all drivers used in the system.

To exercise three UARTs in the system, users can use the following code:

```
//Setup Debug UART
boardCfg = BOARD_INIT_PINMUX_CONFIG |
           BOARD_INIT_MODULE_CLOCK |
           BOARD_INIT_UART_STDIO;

Board_init(boardCfg);

// Open Additional UART Instances:
/* UART SoC init configuration */
UART_initConfig(false);
/* Initialize the default configuration params. */
UART_Params_init(&uartParams);

// Open UART Instance 1
uartTestInstance = 1;
uart1 = UART_open(uartTestInstance, &uartParams);

//Open UART Instance 4
uartTestInstance = 4;
uart4 = UART_open(uartTestInstance, &uartParams);
```

## BoardID Detect:

TI supports multiple evaluation and reference platforms for AM335x hence the hardware platforms are populated with an EEPROM which contains information that identifies the hardware and its revision. The board library and software components read the boardID and initialize the platform based on the boardID. The BoardID\_detect function can be found in the source in the file bbbAM335x\_info.c in the board library and board\_am335x.c in the bootloader source at:

```
<PDK_INSTALL_PATH>\packages\ti\starterware\board\am335x
```

## Rebuilding board Library in Processor SDK RTOS:

While Creating a new folder for the custom board is an option users can explore, TI recommends that users make their changes in existing board package using either bbbAM335x, evmAM335x or iceAM335x folder to avoid spending additional effort to modify the build files for including the customBord.

Once all the update to the board library are completed, the board library can be updated using the following instructions.

Instructions to rebuild board library:

Setup Processor SDK build environment before following steps provided below.

```
cd pdk_am335x_1_0_9/packages
```

```
gmake board_lib
```

For a specific board users are required to provide the LIMIT\_BOARDS argument.

**LIMIT\_BOARDS** : evmAM335x icev2AM335x iceAMIC110 bbbAM335x skAM335x

For Example for beagleboneblack, users can use the following build option:

```
gmake board_lib LIMIT_BOARDS=bbbAM335x
```

## Diagnostics:

After the board library is built, we highly recommend that you create a diagnostics package similar to one provided in board library to test different interfaces functionally during board bring up.

The diagnostics package can be located at `pdk_am335x_1_0_9/packages/ti/board/diag`. These are simple bare-metal tests that use peripheral drivers to help functionally validate the pins and interfaces.

Documentation for all available diagnostic tests is provided here:

[http://processors.wiki.ti.com/index.php/Processor\\_SDK\\_RTOS\\_DIAG](http://processors.wiki.ti.com/index.php/Processor_SDK_RTOS_DIAG)

## Bootloader in Processor SDK RTOS:

As part of the production flow, users are required to develop/port flashing and booting utilities so the application can be launched on the custom board with JTAG. TI provides a bootloader mechanism where the ROM bootloader loads a secondary bootloader on the onchip memory that initializes the SOC and DDR and then copies the application into DDR memory.

The boot process and flashing tools have been described in detail in the following article that is part of processor SDK RTOS Software developer`s guide:

[http://processors.wiki.ti.com/index.php/Processor\\_SDK\\_RTOS\\_BOOT\\_AM335x/AM437x#Building the Bootloader](http://processors.wiki.ti.com/index.php/Processor_SDK_RTOS_BOOT_AM335x/AM437x#Building_the_Bootloader)