


D


C

B

A

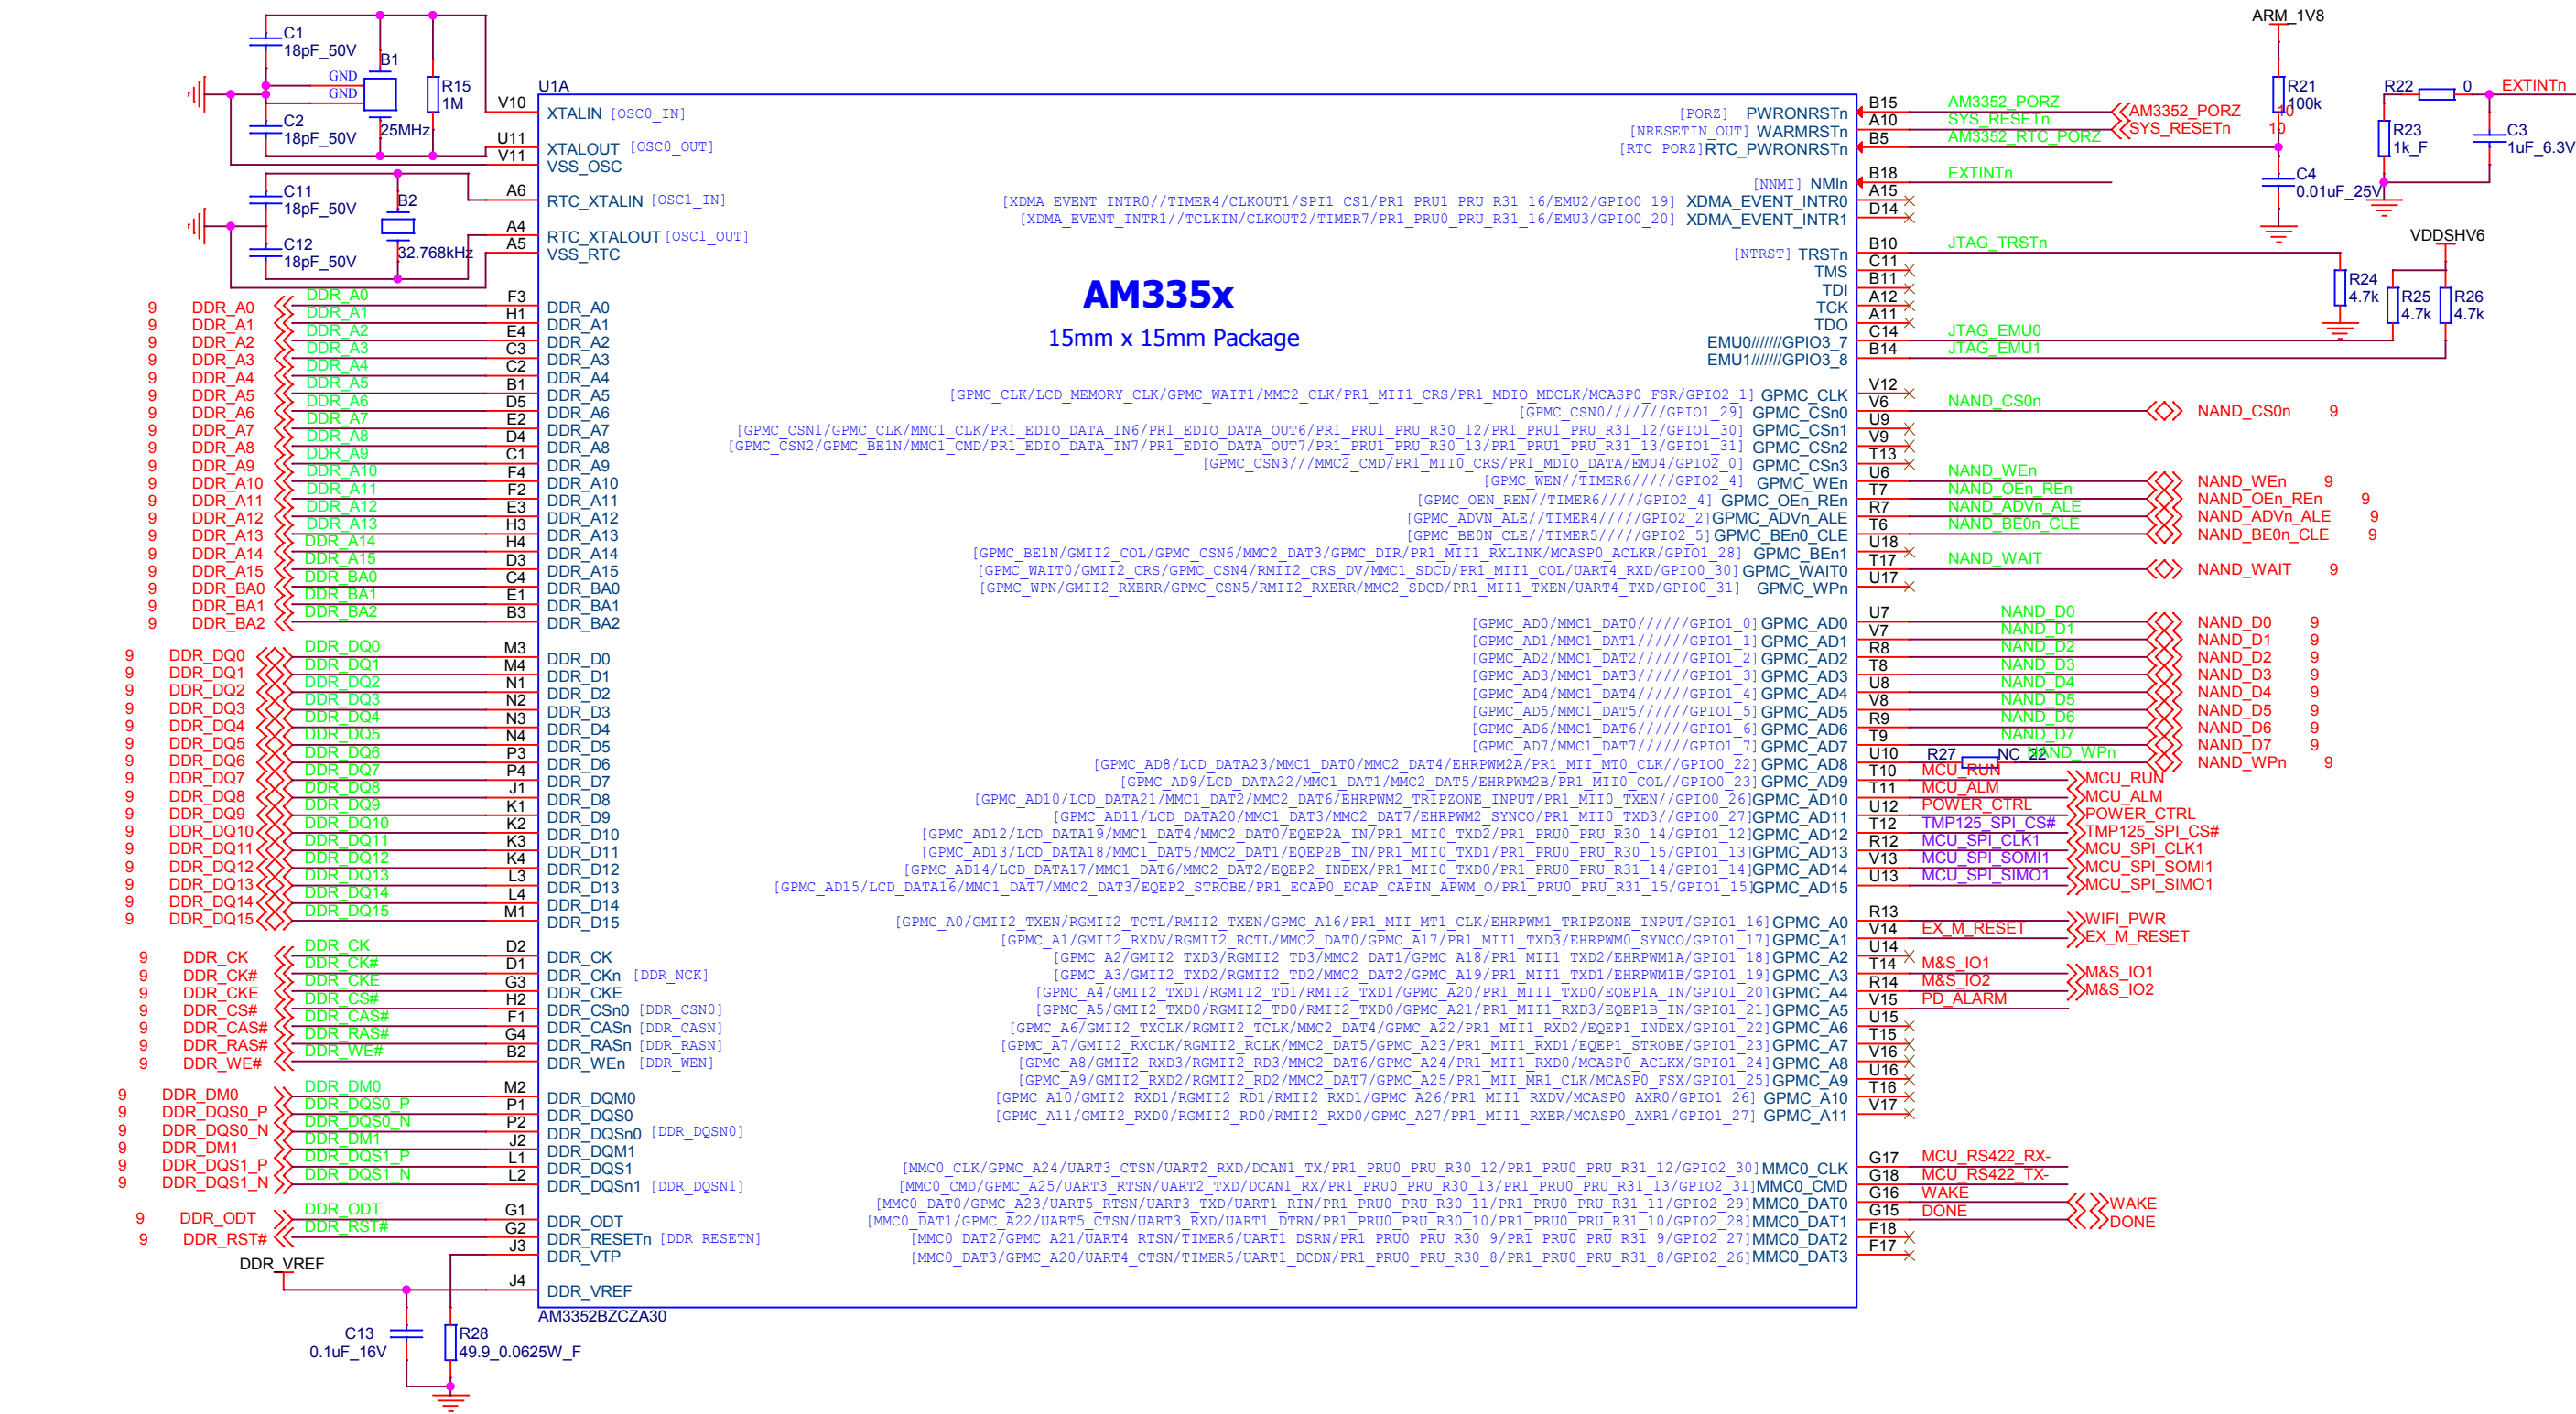


主从通信串口






D

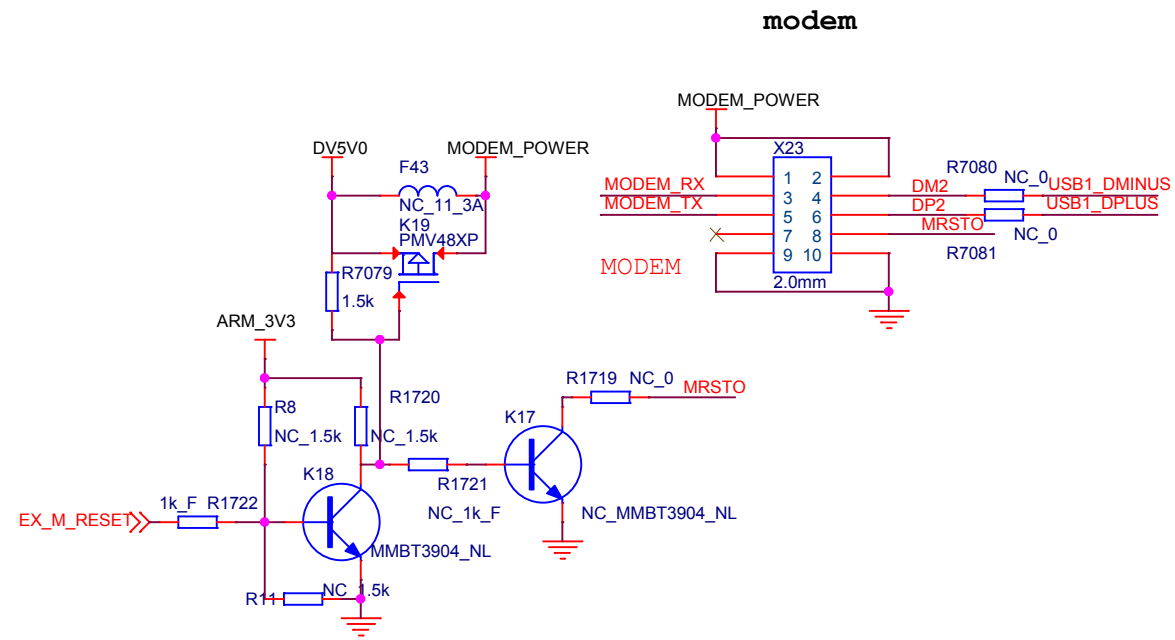



WIFI

放在靠近端口处

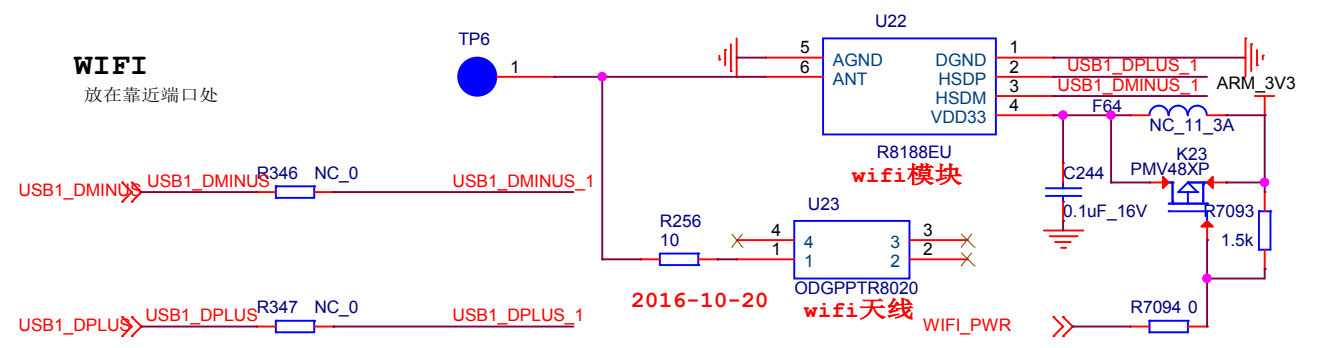


系统需求评审，WIFI可以断电。
高电平关闭WIFI，低电平开启WIFI。

C

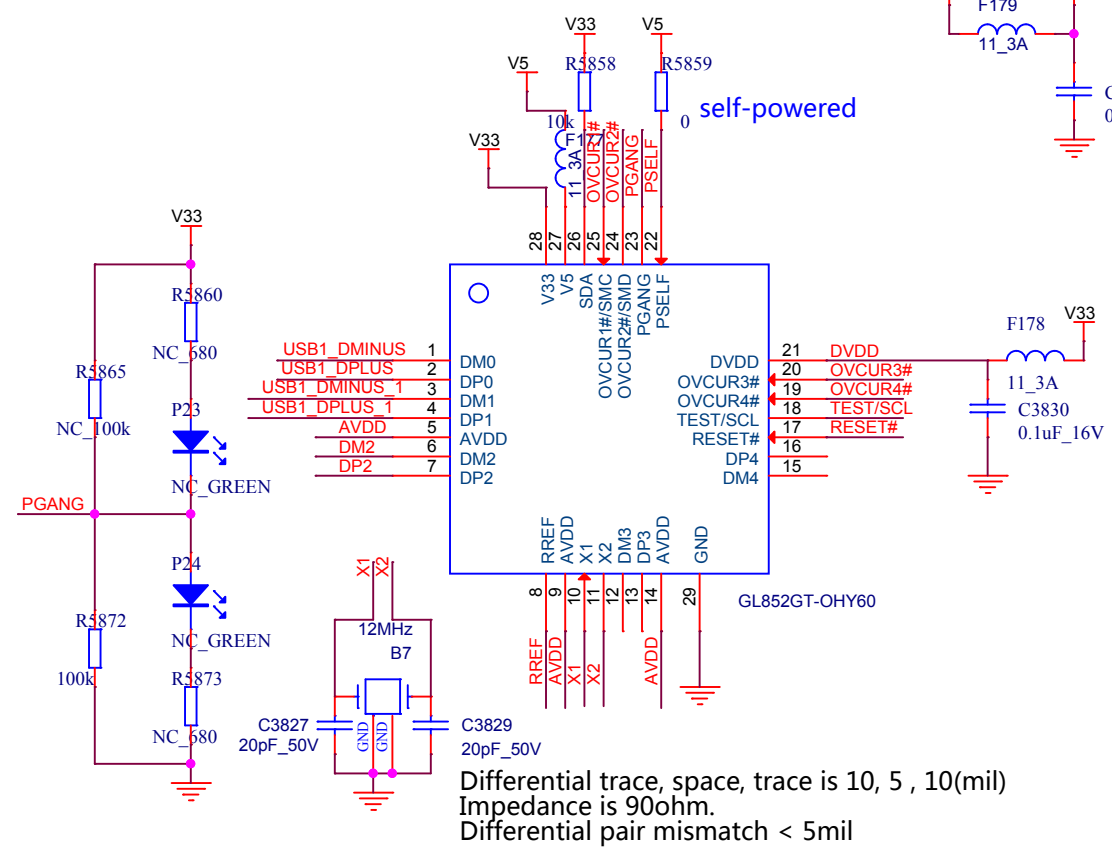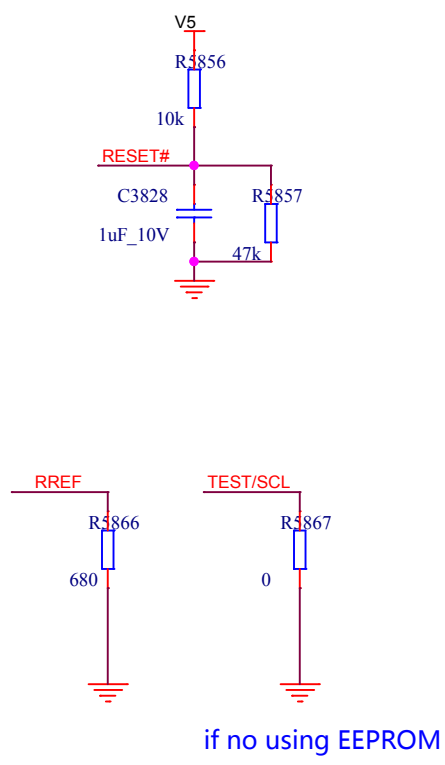

Differential trace, space, trace is 10, 5, 10(mil)
Impedance is 90ohm.
Differential pair mismatch < 5mil

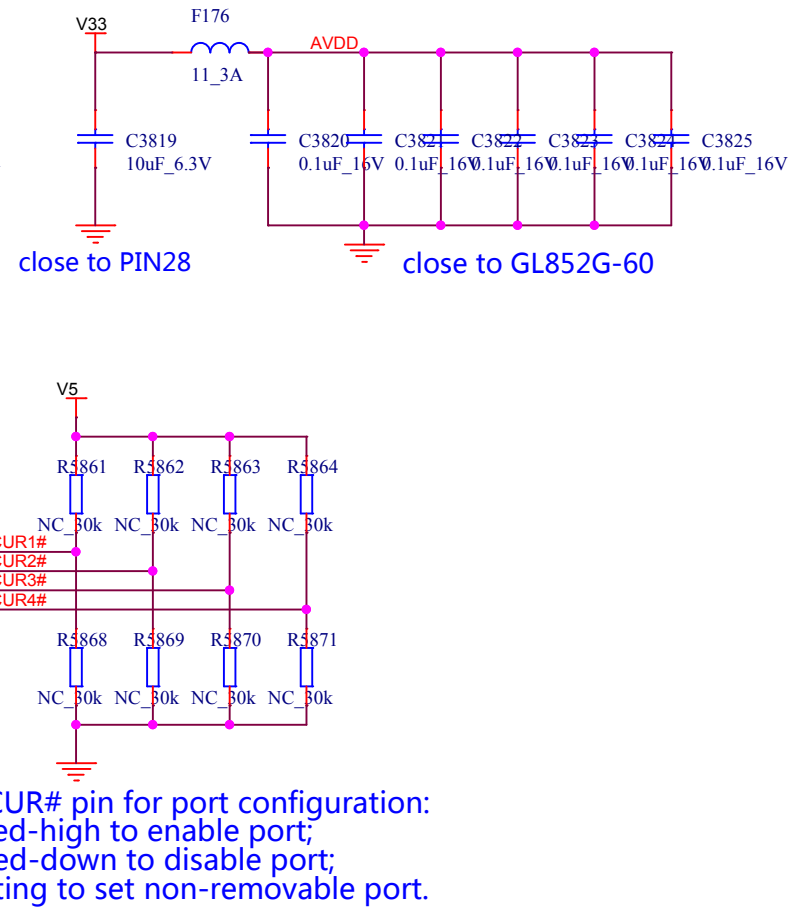

OVCUR# pin for port configuration:
Pulled-high to enable port;
pulled-down to disable port;
floating to set non-removable port.

B

A