PMIC- A

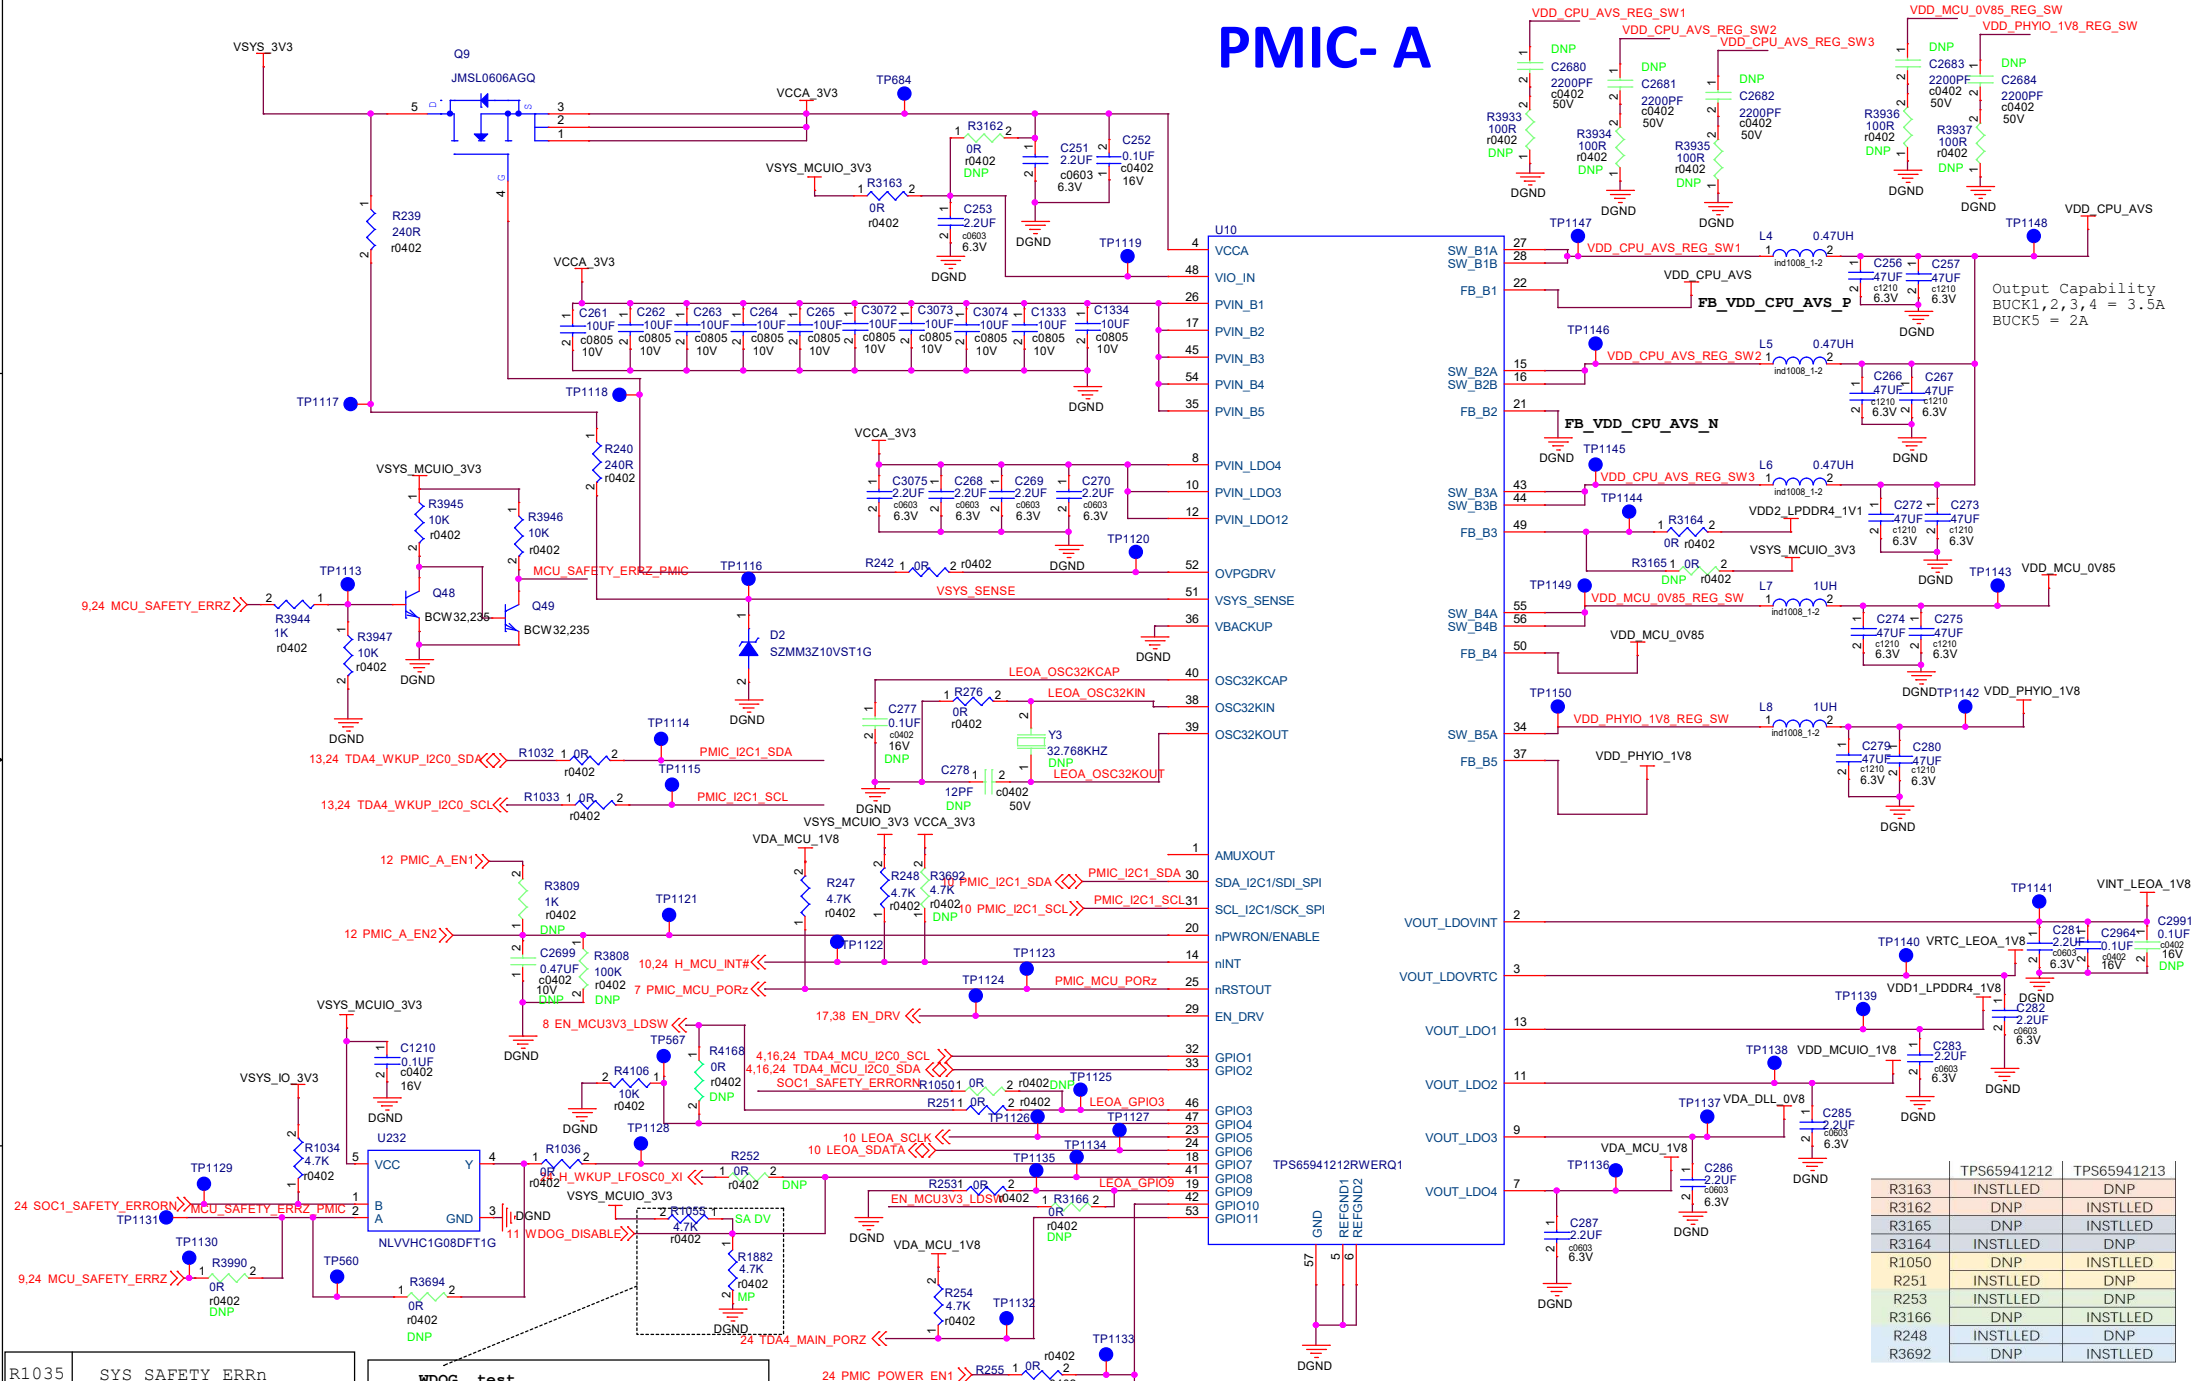

	TPS65941212	TPS65941213
R3163	INSTLLED	DNP
R3162	DNP	INSTLLED
R3165	DNP	INSTLLED
R3164	INSTLLED	DNP
R1050	DNP	INSTLLED
R251	INSTLLED	DNP
R253	INSTLLED	DNP
R3166	DNP	INSTLLED
R248	INSTLLED	DNP
R3692	DNP	INSTLLED

R1035	SYS SAFETY ERRn
Open	MCU_SAFETY_ERRn
Closed	Active low, SoC ERRn or MCU ERRn

WDOG test	
= Open (Low)	Enable WDOG Timer
= Closed(High)	Disable WDOG Timer

PMIC-A uses default I2C ADDR: WKUP_I2C0
0x48, 0x49, 0x4A & 0x4B

iMotion 知行宇科技	iMotion Automotive Technology (Suzhou) Co.,Ltd
Title	SOC PMIC A
Size A3	Document Number IMDHWDDDD007SCH002 Rev 002
Date: Monday, December 26, 2022	Sheet 9 of 43