



# Normal vs Problem DSP comparison

Initializing the DAC via **i2c.2**


**Normal DSP:**

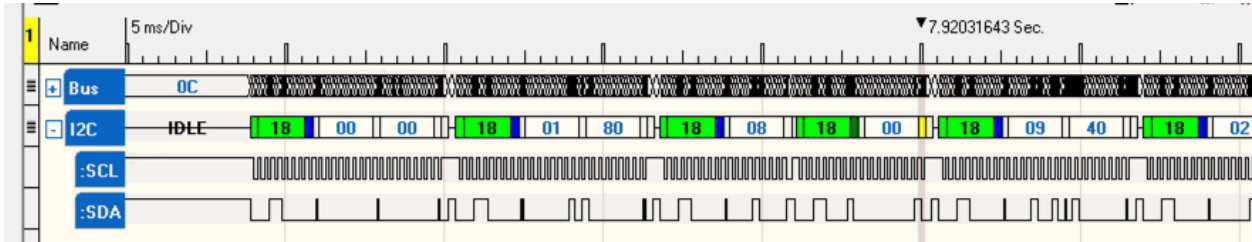

**Problem DSP:**

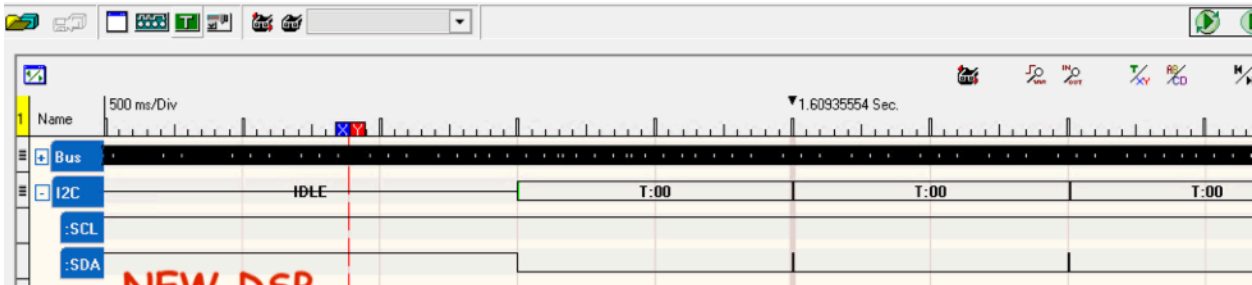

Now initializing the DAC via **i2c.0** on the **Problem DSP**.

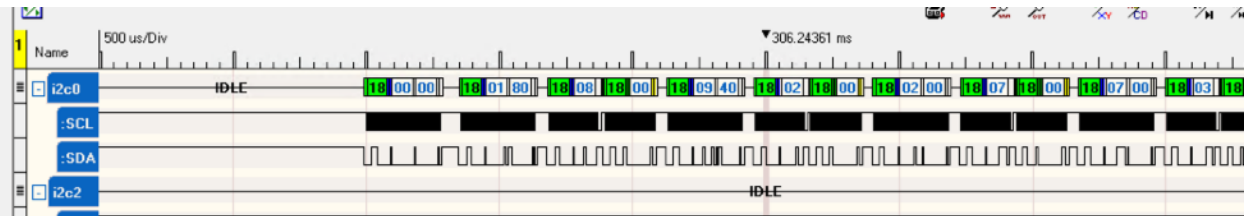

Boot process comparison **Normal** vs **Problem** via **i2c.2**



